


KOGANEI TWIN ROD CYLINDERS B SERIES




SQUARE

A slender, square form offering direct mounting, a compact design that eliminates the need for guides, and a sensor switch magnet as standard!

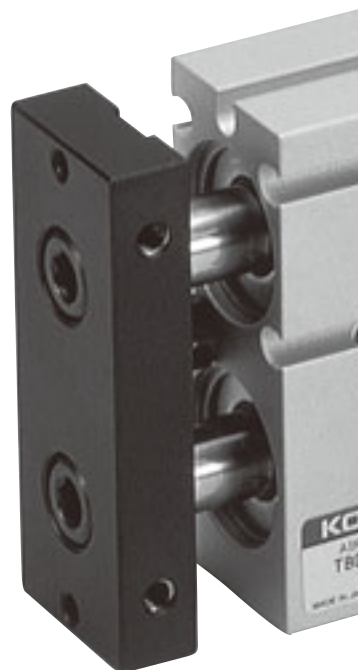

FLAT

This horizontal lead wire type compact sensor switch does not protrude from the body, promoting further space-saving of the mechanical device. In addition, 5 mounting locations on 3 different surfaces facilitate detection of various applications.









POWERFUL

Excellent non-rotating accuracy, while a double piston structure doubles the cylinder's thrust.

In addition, the Twin Rod cylinder B series helps save space and man-hours, plus it lowers costs.



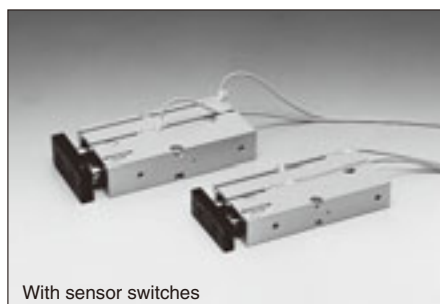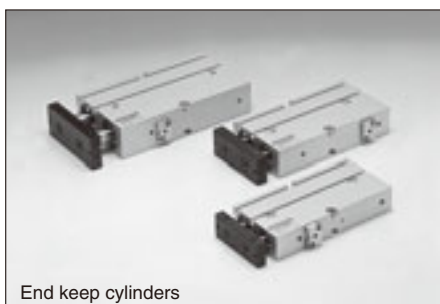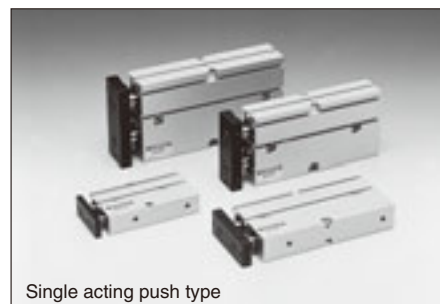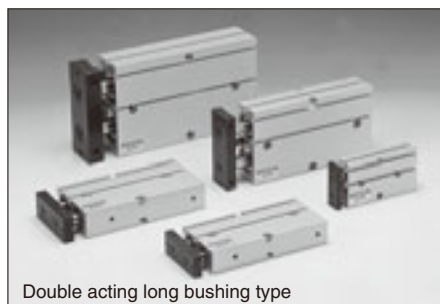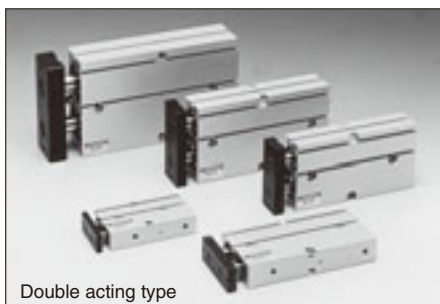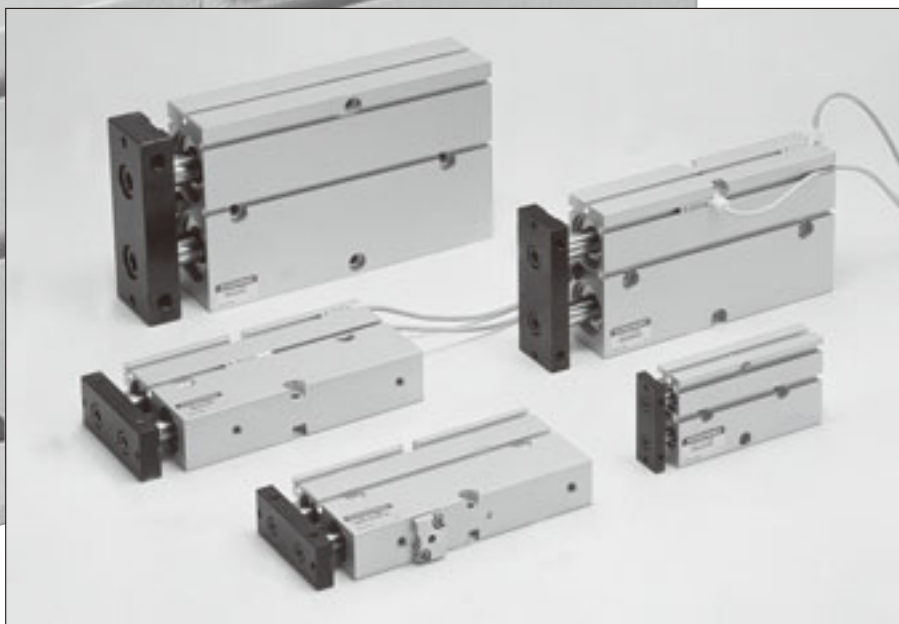

Selection chart

	Cylinder bore size mm	Strokes mm	Sensor switch		Non-ion Specification
			Solid state type	Reed switch type	
Double acting type	<div> <div>10</div> <div>16</div> <div>20</div> <div>25</div> <div>32</div> </div>	<div> <div>10</div> <div>20</div> <div>30</div> <div>40</div> <div>50</div> <div>60</div> <div>70</div> <div>80</div> <div>90</div> <div>100</div> </div> <div> $\phi 10$ $\phi 16, \phi 20, \phi 25, \phi 32$ </div>	ZE135 ZE235 ZE155 ZE255	ZE101 ZE102 ZE201 ZE202	Available
Double acting long bushing type	<div> <div>10</div> <div>16</div> <div>20</div> <div>25</div> <div>32</div> </div>	<div> <div>10</div> <div>20</div> <div>30</div> <div>40</div> <div>50</div> <div>60</div> <div>70</div> <div>80</div> <div>90</div> <div>100</div> </div> <div> $\phi 10$ $\phi 16, \phi 20, \phi 25, \phi 32$ </div>	ZE135 ZE235 ZE155 ZE255	ZE101 ZE102 ZE201 ZE202	None
Single acting push type	<div> <div>10</div> <div>16</div> <div>20</div> <div>25</div> </div>	<div> <div>10</div> <div>20</div> <div>30</div> <div>40</div> <div>50</div> <div>60</div> </div> <div> $\phi 10, \phi 16, \phi 20, \phi 25$ </div>	ZE135 ZE235 ZE155 ZE255	ZE101 ZE102 ZE201 ZE202	None
End keep cylinders	<div> <div>16</div> <div>20</div> <div>25</div> </div>	<div> <div>10</div> <div>20</div> <div>30</div> <div>40</div> <div>50</div> <div>60</div> <div>70</div> <div>80</div> </div> <div> $\phi 16, \phi 20, \phi 25$ </div>	ZE135 ZE235 ZE155 ZE255	ZE101 ZE102 ZE201 ZE202	None

Cylinder Thrust

Select a suitable cylinder bore size considering the load and air pressure to obtain the required thrust.
Since the figures in the table are calculated values, select a bore size that results in a load ratio (load ratio = $\frac{\text{Load}}{\text{Calculated value}}$) of 70% or less (50% or less for high speed application).

N [lbf.]											
Bore size mm [in.]	Rod dia. mm [in.]	Operation		Pressure area mm ² [in. ²]	Air pressure MPa [psi.]						
					0.1 [15]	0.2 [29]	0.3 [44]	0.4 [58]	0.5 [73]	0.6 [87]	0.7 [102]
10 [0.394]	6 [0.236]	Double acting type	Push side	157 [0.243]	—	31.4 [7.06]	47.1 [10.59]	62.8 [14.12]	78.5 [17.65]	94.2 [21.18]	109.9 [24.71]
			Pull side	100 [0.155]	—	20 [4.5]	30 [6.7]	40 [9.0]	50 [11.2]	60 [13.5]	70 [15.7]
		Single Acting	Push Type	157 [0.243]	—	—	5.5 [1.24]	21.2 [4.77]	36.9 [8.30]	52.6 [11.82]	68.3 [15.35]
16 [0.630]	8 [0.315]	Double acting type	Push side	402 [0.623]	40.2 [9.04]	80.4 [18.07]	120.6 [27.11]	160.8 [36.15]	201 [45.18]	241.2 [54.22]	281.4 [63.26]
			Pull side	301 [0.467]	30.1 [6.77]	60.2 [13.53]	90.3 [20.30]	120.4 [27.07]	150.5 [33.83]	180.6 [40.60]	210.7 [47.37]
		Single Acting	Push Type	402 [0.623]	—	39.3 [8.83]	79.5 [17.87]	119.7 [26.91]	159.9 [35.95]	200.1 [44.98]	240.3 [54.02]
20 [0.787]	10 [0.394]	Double acting type	Push side	628 [0.973]	62.8 [14.12]	125.6 [28.23]	188.4 [42.35]	251.2 [56.47]	314 [70.59]	376.8 [84.70]	439.6 [98.82]
			Pull side	471 [0.730]	47.1 [10.59]	94.2 [21.18]	141.3 [31.76]	188.4 [42.35]	235.5 [52.94]	282.6 [63.53]	329.7 [74.12]
		Single Acting	Push Type	628 [0.973]	—	78.2 [17.58]	141 [31.70]	203.8 [45.81]	266.6 [59.93]	329.4 [74.05]	392.2 [88.17]
25 [0.984]	12 [0.472]	Double acting type	Push side	981 [1.521]	98.1 [22.05]	196.2 [44.11]	294.3 [66.16]	392.4 [88.21]	490.5 [110.26]	588.6 [132.32]	686.7 [154.37]
			Pull side	755 [1.170]	75.5 [16.97]	151 [33.94]	226.5 [50.92]	302 [67.89]	377.5 [84.86]	453 [101.83]	528.5 [118.81]
		Single Acting	Push Type	981 [1.521]	—	115.8 [26.03]	213.9 [48.08]	312 [70.14]	410.1 [92.19]	508.2 [114.24]	606.3 [136.30]
32 [1.260]	16 [0.630]	Double acting type	Push side	1607 [2.491]	160.7 [36.13]	321.4 [72.25]	482.1 [108.38]	642.8 [144.50]	803.5 [180.63]	964.2 [216.75]	1124.9 [252.88]
			Pull side	1205 [1.868]	120.5 [27.09]	241 [54.18]	361.5 [81.27]	482 [108.35]	602.5 [135.44]	723 [162.53]	843.5 [189.62]

Note: The values of the single acting push type show the thrust at the end of the 60mm stroke.

The Spring Return Force (Only for the Single Acting Type)

N [lbf.]			
Bore size mm [in.]	Stroke mm	At zero stroke	At the end of stroke
10 [0.394]	10	16.5 [3.71]	20.6 [4.63]
	20	12.4 [2.79]	
	30	8.2 [1.84]	
	40	25.1 [5.64]	41.6 [9.35]
	50	21.0 [4.72]	
	60	16.9 [3.80]	
16 [0.630]	10	15.9 [3.57]	20.4 [4.59]
	20	11.1 [2.50]	
	30	6.3 [1.42]	
	40	22.3 [5.01]	41.1 [9.24]
	50	17.6 [3.96]	
	60	12.8 [2.88]	
20 [0.787]	10	19.6 [4.41]	23.5 [5.28]
	20	15.7 [3.53]	
	30	11.8 [2.65]	
	40	31.7 [7.13]	47.4 [10.66]
	50	27.8 [6.25]	
	60	23.8 [5.35]	
25 [0.984]	10	32.9 [7.40]	39.5 [8.88]
	20	26.2 [5.89]	
	30	19.5 [4.38]	
	40	53.7 [12.07]	80.4 [18.07]
	50	47.1 [10.59]	
	60	40.4 [9.08]	

Notes: 1. The values are for 2 springs.
2. Avoid application that applies a load on the spring return side.

Air Flow Rate and Air Consumption

While the Twin Rod cylinder's air flow rate and air consumption can be found through the following calculations, the quick reference chart to the right provides the answers more conveniently.

$$\text{Air flow rate} \quad Q_1 = \frac{\pi D^2}{4} \times L \times \frac{60}{t} \times \frac{P+0.101}{0.101} \times 10^{-6} \times 2$$

$$\text{Air consumption} \quad Q_2 = \frac{\pi D^2}{4} \times L \times 2 \times n \times \frac{P+0.101}{0.101} \times 10^{-6} \times 2$$

Q ₁ : Required air flow rate for cylinder	ℓ /min (ANR)
Q ₂ : Air consumption of cylinder	ℓ /min (ANR)
D: Cylinder bore diameter	mm
L: Cylinder stroke	mm
t: Time required for cylinder to travel 1 stroke	s
n: Number of cylinder reciprocations per minute	times/min
P: Air pressure	MPa

$$\text{Air flow rate} \quad Q_1' = \frac{\pi D'^2}{4} \times L' \times \frac{60}{t} \times \frac{P'+14.7}{14.7} \times \frac{1}{1728} \times 2$$

$$\text{Air consumption} \quad Q_2' = \frac{\pi D'^2}{4} \times L' \times 2 \times n \times \frac{P'+14.7}{14.7} \times \frac{1}{1728} \times 2$$

Q ₁ ': Required air flow rate for cylinder	ft ³ /min. (ANR)*
Q ₂ ': Air consumption of cylinder	ft ³ /min. (ANR)*
D': Cylinder bore diameter	in.
L': Cylinder stroke	in.
t: Time required for cylinder to travel 1 stroke	sec.
n: Number of cylinder reciprocations per minute	times/min.
P': Air pressure	psi.

※ Refer to p.54 for an explanation of ANR.

Air consumption for each 1mm [0.0394in.] stroke $\text{cm}^3 [\text{in}^3]/\text{Reciprocation (ANR)}$

Bore size mm	Air pressure MPa [psi.]						
	0.1 [15]	0.2 [29]	0.3 [44]	0.4 [58]	0.5 [73]	0.6 [87]	0.7 [102]
10	(0.620 [0.03783])	0.924 [0.05639]	1.228 [0.07494]	1.534 [0.09361]	1.838 [0.11216]	2.146 [0.13096]	2.450 [0.14951]
16	1.584 [0.09666]	2.364 [0.14426]	3.146 [0.19198]	3.926 [0.23958]	4.704 [0.28706]	5.486 [0.33478]	6.266 [0.38238]
20	2.48 [0.1513]	3.72 [0.2270]	4.90 [0.2990]	6.14 [0.3747]	7.36 [0.4491]	8.58 [0.5236]	9.80 [0.5980]
25	3.88 [0.2368]	5.78 [0.3527]	7.66 [0.4674]	9.58 [0.5846]	11.50 [0.7018]	13.42 [0.8189]	15.34 [0.9361]
32	6.36 [0.3881]	9.46 [0.5773]	12.56 [0.7665]	15.70 [0.9581]	18.82 [1.1485]	21.96 [1.3401]	25.10 [1.5317]

The figures in the table show the air flow rate and air consumption when an air cylinder makes 1 reciprocation with stroke of 1mm [0.0394in.].

The air flow rate and air consumption actually required is found by the following calculations.

- Finding the air flow rate (for selecting F.R.L., valves, etc.)

Example 1. When operating a Twin Rod cylinder with bore size of 20mm [0.787in.] at speed of 300mm/s [11.8in./sec.] and under air pressure of 0.5MPa [73psi.]

$$7.36 \times \frac{1}{2} \times 300 \times 10^{-3} = 1.10 \text{ ℓ /s [0.0388ft}^3\text{/sec.]} \text{ (ANR)}$$

$$\left(\text{At this time, the flow rate per minute is } 7.36 \times \frac{1}{2} \times 300 \times 60 \times 10^{-3} = 66.24 \text{ ℓ /min [2.338ft}^3\text{/min.]} \text{ (ANR)} \right)$$

- Finding the air consumption

Example 1. When operating a Twin Rod cylinder with bore size of 20mm [0.787in.], stroke of 50mm [1.97in.], and under air pressure of 0.5MPa [73psi.], for 1 reciprocation.

$$7.36 \times 50 \times 10^{-3} = 0.368 \text{ ℓ /Reciprocation [0.0130ft}^3\text{/Reciprocation]} \text{ (ANR)}$$



Example 2. When operating a Twin Rod cylinder with a bore size of 20mm [0.787in.], a stroke of 50mm [1.97in.], and under air pressure of 0.5MPa [73psi.], for 10 reciprocations per minute.

$$7.36 \times 50 \times 10 \times 10^{-3} = 3.68 \text{ ℓ /min [0.130ft}^3\text{/min.]} \text{ (ANR)}$$

TWIN ROD CYLINDERS B SERIES

Single Acting Push Type

Symbol

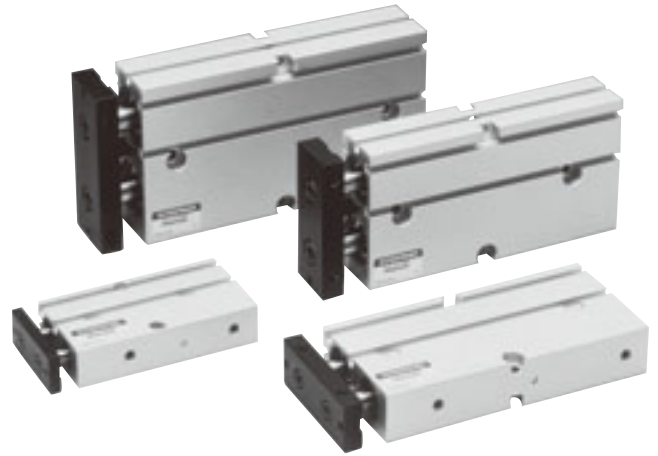

Specifications

Item	Bore size mm [in.]		10 [0.394]	16 [0.630]	20 [0.787]	25 [0.984]			
Operation type	Single acting push type								
Media	Air								
Mounting type	Side mount								
Operating pressure range MPa [psi.]	0.25~0.7 [36~102]	0.2~0.7 [29~102]							
Proof pressure MPa [psi.]	1.05 [152]								
Operating temperature range °C [°F]	0~60 [32~140]								
Operating speed range mm/s [in./sec.]	100~500 [3.9~19.7]								
Cushion	Rubber bumper ^{Note}								
Lubrication	Not required (If lubrication is required, use Turbine Oil Class 1 [ISO VG32] or equivalent.)								
Non-rotating accuracy	±0.4°	±0.3°							
Stroke adjusting range mm [in.]	-5~0 [-0.197~0] (To the specification stroke)								
Port size	M5×0.8								

Note: For the 10mm [0.394in.] bore size, rubber bumper is only installed at the pull side. Piston side bumper is not available.

Bore Size and Stroke


mm			
Bore size	Standard strokes	Maximum available stroke	Pull side stroke adjusting range
10	10, 20, 30, 40, 50, 60	60	-5~0
16	10, 20, 30, 40, 50, 60	60	
20	10, 20, 30, 40, 50, 60	60	
25	10, 20, 30, 40, 50, 60	60	

Order Codes

TBSA	16×30	—											
Twin rod cylinder B series single acting push type <small>Note</small>	Bore size × Stroke		Sensor switch	Lead wire length A : 1000mm [39in.] B : 3000mm [118in.]	Number of sensor switches 1 — With 1 sensor switch 2 — With 2 sensor switches								
			Blank — No sensor switch										
			ZE135 — 2-lead wire, Solid state type			with indicator lamp	DC10~28V			Horizontal lead wire	● For details of sensor switches, see p.1544.		
			ZE235 — 2-lead wire, Solid state type			with indicator lamp	DC10~28V			Vertical lead wire			
			ZE155 — 3-lead wire, Solid state type			with indicator lamp	DC4.5~28V			Horizontal lead wire			
			ZE255 — 3-lead wire, Solid state type			with indicator lamp	DC4.5~28V			Vertical lead wire			
			ZE101 — 2-lead wire, Reed switch type			without indicator lamp	DC5~28V AC85~115V			Horizontal lead wire			
			ZE201 — 2-lead wire, Reed switch type			without indicator lamp	DC5~28V AC85~115V			Vertical lead wire			
			ZE102 — 2-lead wire, Reed switch type			with indicator lamp	DC10~28V AC85~115V			Horizontal lead wire			
			ZE202 — 2-lead wire, Reed switch type			with indicator lamp	DC10~28V AC85~115V			Vertical lead wire			

Note: In the single acting push type, the magnet for sensor switch is built-in.

Inner Construction and Major Parts

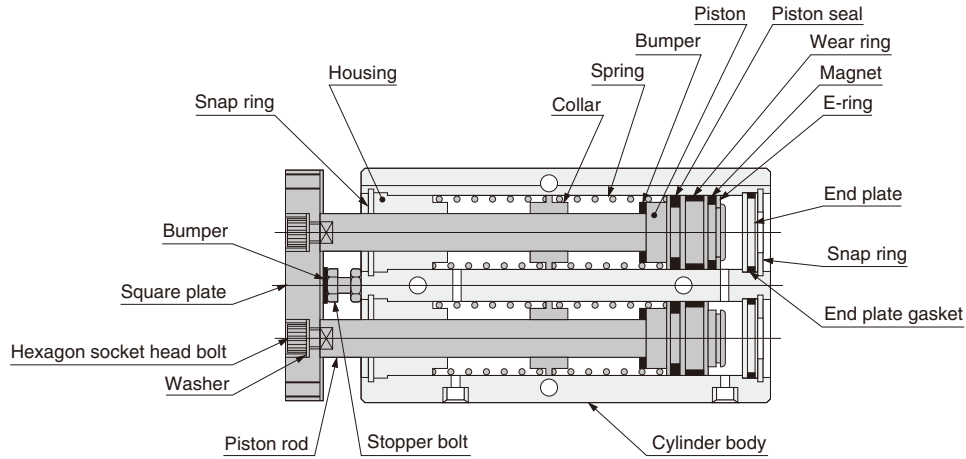

Major Parts and Materials

Parts	Materials
Cylinder body	Aluminum alloy (anodized)
Piston	Aluminum alloy (chromic acid anodic oxide coating)
Wear ring	Plastic
Piston rod	Steel (chrome plated)
Gasket	Synthetic rubber (NBR)
Housing	Aluminum alloy (special wear-resistant treatment)
End plate	Plastic
Seal	Synthetic rubber (NBR)
Snap ring	Steel (nickel plated)
Magnet	Plastic magnet
Spring	Piano wire
Collar	Plastic
E-ring	Stainless steel
Washer	Steel (nickel plated)
Square plate	Mild steel (nickel plated)
Bumper ^{Note}	Synthetic rubber (NBR)
Stopper bolt	Mild steel (zinc plated)

Note: For the 10mm [0.394in.] bore size, piston side bumper is not available.

Seals

Item	Piston seal	End plate gasket
Quantity	2	2
Bore mm		
10	COP-10L	1.5×9
16	PWP-16	1.5×14.5
20	PWP-20	1.5×18
25	PWP-25	1.5×23

Mass

Bore size mm [in.]	Basic mass ^{Note1}						Additional mass	
	Stroke mm						Mass of 1 sensor switch ^{Note2}	
	10	20	30	40	50	60	ZE□□□A	ZE□□□B
10 [0.394]	117 [4.13]	137 [4.83]	157 [5.54]	197 [6.95]	217 [7.65]	237 [8.36]	15 [0.53]	35 [1.23]
16 [0.630]	230 [8.11]	257 [9.07]	288 [10.16]	344 [12.13]	369 [13.02]	394 [13.90]		
20 [0.787]	372 [13.12]	407 [14.36]	442 [15.59]	521 [18.38]	556 [19.61]	591 [20.85]		
25 [0.984]	557 [19.65]	603 [21.27]	649 [22.89]	760 [26.81]	814 [28.71]	868 [30.62]		

Notes: 1. The above table is for the standard strokes.


2. There are 2 types of sensor switch lead wire lengths.

A : 1000mm [39in.], B : 3000mm [118in.]

Calculation example: The mass for bore size of 20mm, and stroke of 60mm, with 2 sensor switches (ZE135A),
 $591 + (15 \times 2) = 621\text{g}$ [21.90oz.]

Dimensions of Single Acting Push Type (mm)


● $\phi 10$

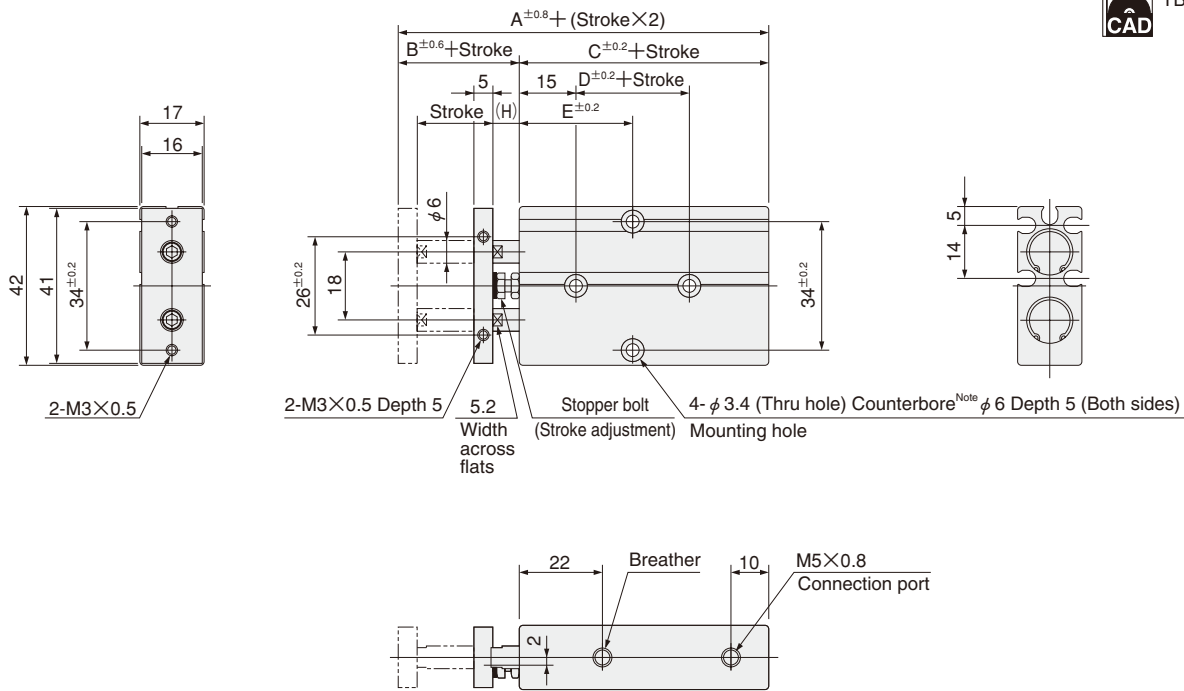

Stroke Bore mm [in.]	Code		A		B		C		D		E						H	
	10~30	40~60	10~30	40~60	10~30	40~60	10~30	40~60	10~30	40~60	10	20	30	40	50	60	10~30	40~60
10 [0.394]	58	66	12	10	46	56	10	20	30	30	35	45	50	55			7	5

Note: The counterbore depth is measured from the upper surface of the body.


Dimensions of Rod End (mm)

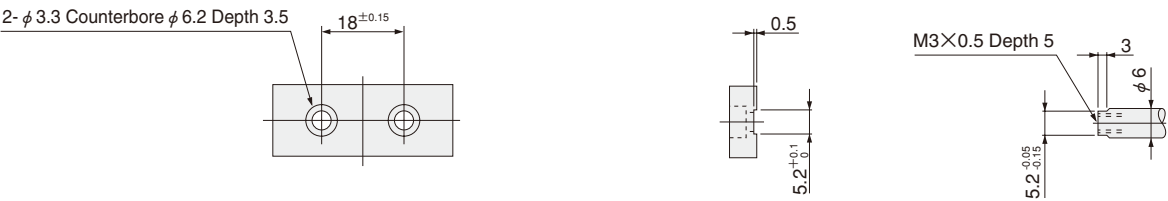

Dimensions of Single Acting Push Type (mm)

● $\phi 16 \sim \phi 25$

CAD TBSA Bore size

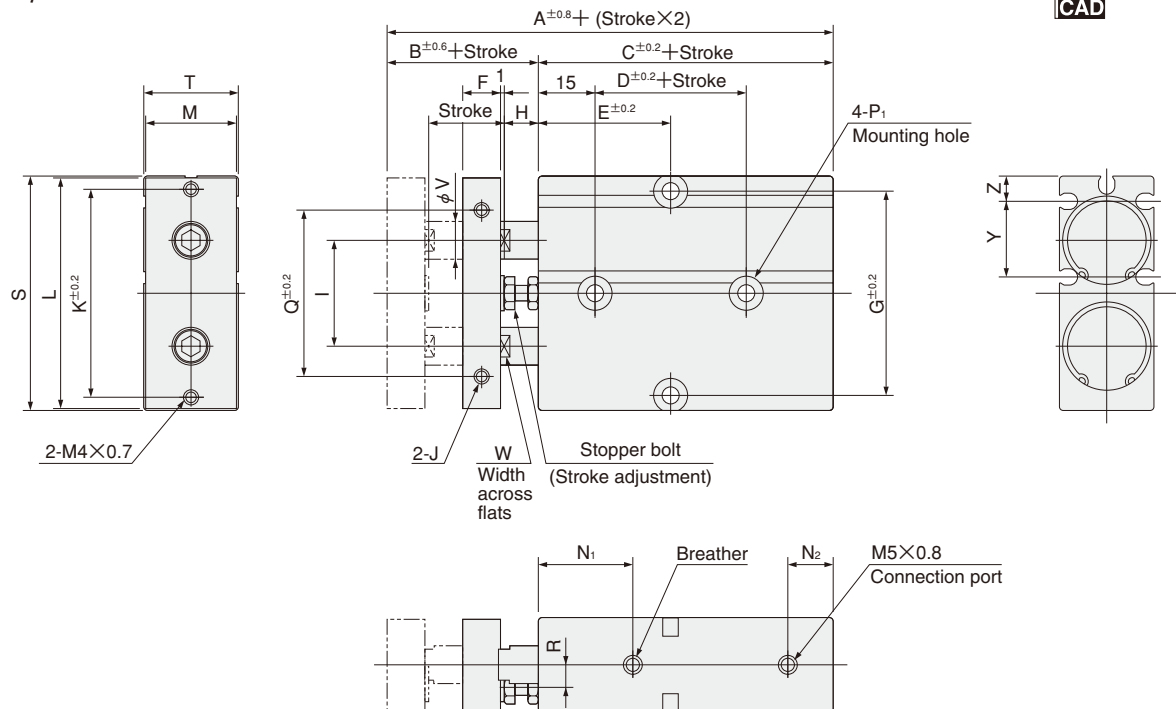


Code Stroke Bore mm [in.]	A		B	C		D		E						F	G	H	I	J
	10~30	40~60		10~30	40~60	10~30	40~60	10	20	30	40	50	60					
16 [0.630]	68	78	15	53	63	20	30	30	35	40	50	55	60	8	47	6	24	M4×0.7 Depth 5
20 [0.787]	78	88	20	58	68	20	30	35	35	40	50	55	60	10	55	9	28	M4×0.7 Depth 5
25 [0.984]	81	91	19	62	72	30	40	40	40	45	55	60	65	10	66	8	34	M5×0.8 Depth 6

Code Bore mm [in.]	K		L	M	N ₁	N ₂	P ₁ Note		Q	R	S	T	V	W	Y	Z
16 [0.630]	47	53	20	22	10		$\phi 4.5$ (Thru hole) Counterbore $\phi 8$ Depth 5.5 (Both sides)		34	4	54	21	8	6.2	18.5	5.7
20 [0.787]	55	61	24	25	12		$\phi 4.5$ (Thru hole) Counterbore $\phi 8$ Depth 5.5 (Both sides)		44	6	62	25	10	8.2	20	6.8
25 [0.984]	66	72	29	30	12		$\phi 4.5$ (Thru hole) Counterbore $\phi 9$ Depth 6 (Both sides)		56	7	73	30	12	10.2	22.5	8.3

Note: The counterbore depth is measured from the upper surface of the body.

Dimensions of Rod End (mm)

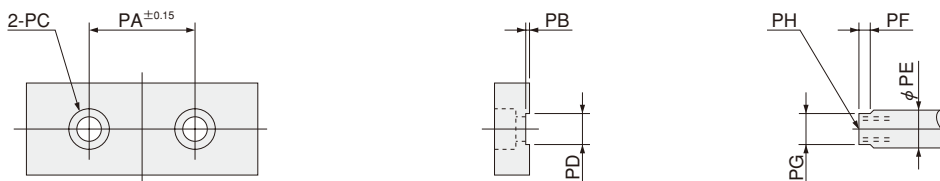



Code Bore mm [in.]	PA		PB	PC		PD	PE	PF	PG	PH
16 [0.630]	24	1		$\phi 4.3$ Counterbore $\phi 7.8$ Depth 4.6		6.2 $^{+0.1}_{-0}$	8	3	6.2 $^{+0.05}_{-0.15}$	M4 × 0.7 Depth 6
20 [0.787]	28	1		$\phi 6.5$ Counterbore $\phi 11$ Depth 6.8		8.2 $^{+0.1}_{-0}$	10	3	8.2 $^{+0.05}_{-0.15}$	M6 × 1 Depth 8
25 [0.984]	34	1		$\phi 6.5$ Counterbore $\phi 11$ Depth 6.8		10.2 $^{+0.1}_{-0}$	12	3	10.2 $^{+0.05}_{-0.15}$	M6 × 1 Depth 8


When Mounting Cylinders with Sensor Switches in Close Proximity


When mounting cylinders in close proximity, install the cylinder so that it should not be at or below the values in the following table.

mm [in.]

Status of mounting in close proximity	Code	Bore size Type	10 [0.394]	16 [0.630]	20 [0.787]	25 [0.984]	32 [1.260]
	A	Solid state type	53 [2.09]	66 [2.60]	73 [2.87]	87 [3.43]	119 [4.69]
		Reed switch type	48 [1.89]	60 [2.36]	68 [2.68]	81 [3.19]	109 [4.29]
	B	Solid state type	11 [0.43]	12 [0.47]	11 [0.43]	14 [0.55]	23 [0.91]
		Reed switch type	6 [0.24]			8 [0.31]	13 [0.51]

	A	Solid state type	47 [1.85]	59 [2.32]	65 [2.56]	77 [3.03]	107 [4.21]
		Reed switch type	42 [1.65]	54 [2.13]	62 [2.44]	73 [2.87]	96 [3.78]
	B	Solid state type	5 [0.20]			3 [0.12]	4 [0.16]
		Reed switch type	0				

	A	Solid state type	28 [1.10]	33 [1.30]	36 [1.42]	44 [1.73]	65 [2.56]
		Reed switch type	22 [0.87]	27 [1.06]	30 [1.18]	37 [1.46]	53 [2.09]
	B	Solid state type	11 [0.43]	12 [0.47]	11 [0.43]	14 [0.55]	25 [0.98]
		Reed switch type	5 [0.20]	6 [0.24]	5 [0.20]	7 [0.28]	13 [0.51]

	A	Solid state type	21 [0.83]	24 [0.94]	25 [0.98]	30 [1.18]	44 [1.73]
		Reed switch type	17 [0.67]	21 [0.83]	25 [0.98]	30 [1.18]	40 [1.57]
	B	Solid state type	4 [0.16]	3 [0.12]	0		4 [0.16]
		Reed switch type	0				


Remark: For mounting in configurations other than the above, consult us.

Mounting Location of End of Stroke Detection Sensor Switch


When the sensor switch is mounted in the locations shown below (the figures in the tables are reference values), the magnet comes to the maximum sensing location of the sensor switch at the end of the stroke.

● Double acting type

■ When the lead wires are pulled from the head side.

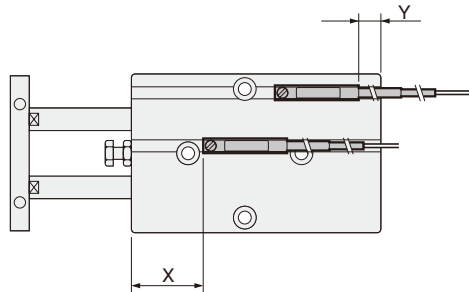

■ When the lead wire of the head side detection sensor switch only is pulled from the rod side.

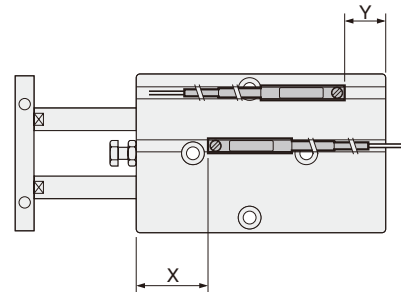

Standard cylinder

● Solid state type mm [in.]

Code \ Bore	10 [0.394]	16 [0.630]	20 [0.787]	25 [0.984]	32 [1.260]
X	27.5 [1.083]	33.5 [1.319]	37.5 [1.476]	42.5 [1.673]	52 [2.047]
Y	3.5 [0.138]	4.5 [0.177]	5.5 [0.217]	4.5 [0.177]	11 [0.433]

● Reed switch type mm [in.]

Code \ Bore	10 [0.394]	16 [0.630]	20 [0.787]	25 [0.984]	32 [1.260]
X	23.5 [0.925]	29.5 [1.161]	33.5 [1.319]	38.5 [1.516]	48 [1.890]
Y	0.5 [0.020]	1.5 [0.059]	2.5 [0.098]	1.5 [0.059]	8 [0.315]

● Solid state type mm [in.]

Code \ Bore	10 [0.394]	16 [0.630]	20 [0.787]	25 [0.984]	32 [1.260]
X	27.5 [1.083]	33.5 [1.319]	37.5 [1.476]	42.5 [1.673]	52 [2.047]
Y	6.5 [0.256]	7.5 [0.295]	8.5 [0.335]	7.5 [0.295]	14 [0.551]

● Reed switch type mm [in.]

Code \ Bore	10 [0.394]	16 [0.630]	20 [0.787]	25 [0.984]	32 [1.260]
X	23.5 [0.925]	29.5 [1.161]	33.5 [1.319]	38.5 [1.516]	48 [1.890]
Y	2.5 [0.098]	3.5 [0.138]	4.5 [0.177]	3.5 [0.138]	10 [0.394]

Double acting long bushing type

● Solid state type mm [in.]

Code \ Bore	10 [0.394]	16 [0.630]	20 [0.787]	25 [0.984]	32 [1.260]
X	37.5 [1.476]	43.5 [1.713]	47.5 [1.870]	52.5 [2.067]	62 [2.441]
Y	3.5 [0.138]	4.5 [0.177]	5.5 [0.217]	4.5 [0.177]	11 [0.433]

● Reed switch type mm [in.]

Code \ Bore	10 [0.394]	16 [0.630]	20 [0.787]	25 [0.984]	32 [1.260]
X	33.5 [1.319]	39.5 [1.555]	43.5 [1.713]	48.5 [1.909]	58 [2.283]
Y	0.5 [0.020]	1.5 [0.059]	2.5 [0.098]	1.5 [0.059]	8 [0.315]

● Solid state type mm [in.]

Code \ Bore	10 [0.394]	16 [0.630]	20 [0.787]	25 [0.984]	32 [1.260]
X	37.5 [1.476]	43.5 [1.713]	47.5 [1.870]	52.5 [2.067]	62 [2.441]
Y	6.5 [0.256]	7.5 [0.295]	8.5 [0.335]	7.5 [0.295]	14 [0.551]

● Reed switch type mm [in.]

Code \ Bore	10 [0.394]	16 [0.630]	20 [0.787]	25 [0.984]	32 [1.260]
X	33.5 [1.319]	39.5 [1.555]	43.5 [1.713]	48.5 [1.909]	58 [2.283]
Y	2.5 [0.098]	3.5 [0.138]	4.5 [0.177]	3.5 [0.138]	10 [0.394]

End keep cylinder

● Solid state type mm [in.]

End keep position	Code \ Bore	16 [0.630]	20 [0.787]	25 [0.984]
-HL : Head side end keep	X	33.5 [1.319]	37.5 [1.476]	42.5 [1.673]
	Y	24.5 [0.965]	25.5 [1.004]	24.5 [0.965]
-RL : Rod side end keep	X	53.5 [2.106]	57.5 [2.264]	62.5 [2.461]
	Y	4.5 [0.177]	5.5 [0.217]	4.5 [0.177]

● Reed switch type mm [in.]

End keep position	Code \ Bore	16 [0.630]	20 [0.787]	25 [0.984]
-HL : Head side end keep	X	29.5 [1.161]	33.5 [1.319]	38.5 [1.516]
	Y	21.5 [0.846]	22.5 [0.886]	21.5 [0.846]
-RL : Rod side end keep	X	49.5 [1.949]	53.5 [2.106]	58.5 [2.303]
	Y	1.5 [0.059]	2.5 [0.098]	1.5 [0.059]

● Solid state type mm [in.]


End keep position	Code \ Bore	16 [0.630]	20 [0.787]	25 [0.984]
-HL : Head side end keep	X	33.5 [1.319]	37.5 [1.476]	42.5 [1.673]
	Y	27.5 [1.083]	28.5 [1.122]	27.5 [1.083]
-RL : Rod side end keep	X	53.5 [2.106]	57.5 [2.264]	62.5 [2.461]
	Y	7.5 [0.295]	8.5 [0.335]	7.5 [0.295]

● Reed switch type mm [in.]


End keep position	Code \ Bore	16 [0.630]	20 [0.787]	25 [0.984]
-HL : Head side end keep	X	29.5 [1.161]	33.5 [1.319]	38.5 [1.516]
	Y	23.5 [0.925]	24.5 [0.965]	23.5 [0.925]
-RL : Rod side end keep	X	49.5 [1.949]	53.5 [2.106]	58.5 [2.303]
	Y	3.5 [0.138]	4.5 [0.177]	3.5 [0.138]

● Single acting push type

■ When the lead wires are pulled from the head side.

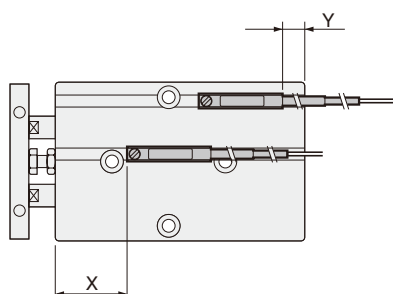

■ When the lead wire of the head side detection sensor switch only is pulled from the rod side.



● Solid state type

mm [in.]

Stroke	Code	Bore	10 [0.394]	16 [0.630]	20 [0.787]	25 [0.984]
10, 20, 30	X		27.5 [1.083]	33.5 [1.319]	37.5 [1.476]	42.5 [1.673]
	Y		3.5 [0.138]	4.5 [0.177]	5.5 [0.217]	4.5 [0.177]
40, 50, 60	X		39.5 [1.555]	43.5 [1.713]	47.5 [1.870]	52.5 [2.067]
	Y		1.5 [0.059]	4.5 [0.177]	5.5 [0.217]	4.5 [0.177]

● Solid state type

mm [in.]

Stroke	Code	Bore	10 [0.394]	16 [0.630]	20 [0.787]	25 [0.984]
10, 20, 30	X		27.5 [1.083]	33.5 [1.319]	37.5 [1.476]	42.5 [1.673]
	Y		6.5 [0.256]	7.5 [0.295]	8.5 [0.335]	7.5 [0.295]
40, 50, 60	X		39.5 [1.555]	43.5 [1.713]	47.5 [1.870]	52.5 [2.067]
	Y		4.5 [0.177]	7.5 [0.295]	8.5 [0.335]	7.5 [0.295]

● Reed switch type

mm [in.]

Stroke	Code	Bore	10 [0.394]	16 [0.630]	20 [0.787]	25 [0.984]
10, 20, 30	X		23.5 [0.925]	29.5 [1.161]	33.5 [1.319]	38.5 [1.516]
	Y		0.5 [0.020]	1.5 [0.059]	2.5 [0.098]	1.5 [0.059]
40, 50, 60	X		35.5 [1.398]	39.5 [1.555]	43.5 [1.713]	48.5 [1.909]
	Y		-1.5 [-0.059]	1.5 [0.059]	2.5 [0.098]	1.5 [0.059]

● Reed switch type


mm [in.]

Stroke	Code	Bore	10 [0.394]	16 [0.630]	20 [0.787]	25 [0.984]
10, 20, 30	X		23.5 [0.925]	29.5 [1.161]	33.5 [1.319]	38.5 [1.516]
	Y		2.5 [0.098]	3.5 [0.138]	4.5 [0.177]	3.5 [0.138]
40, 50, 60	X		35.5 [1.398]	39.5 [1.555]	43.5 [1.713]	48.5 [1.909]
	Y		0.5 [0.020]	3.5 [0.138]	4.5 [0.177]	3.5 [0.138]

Mountable or Unmountable Sensor Switch and Undetectable Stroke Range at End of Stroke


Double acting type (TBDA), single acting push type (TBSA)

In the case of using 4 mounting holes on the body

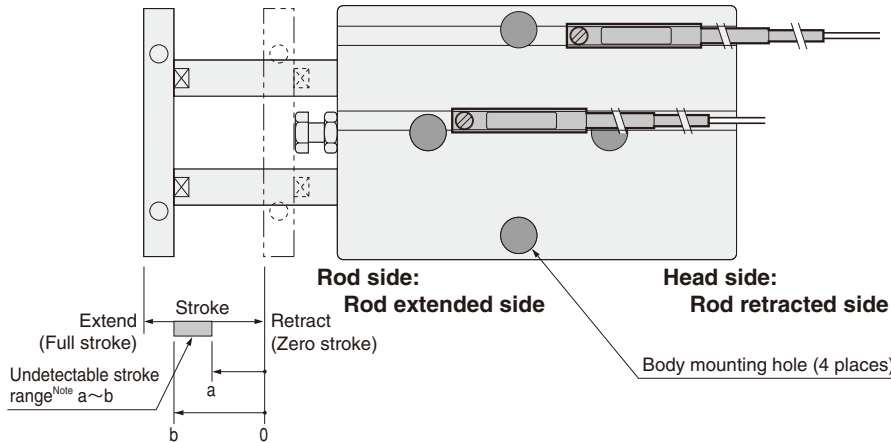

Note: The undetectable stroke range is the value measured from the zero stroke with 1 sensor switch installation.

● Sensor switch mounting surface



Mounting a sensor switch in any of the grooves A~E allows detection at either the head side or rod side stroke end, and intermediate positions. The diagram shows the rod side with the square plate removed.

Caution

When mounting a sensor switch in the A or E groove's rod extended side (the rod side of the body), ensure that the sensor switch is installed inside the groove between body mounting holes before tightening body mounting bolts, to avoid interference between the sensor switch and the bolts.

This procedure is not necessary for $\phi 25$ [0.984in.] and $\phi 32$ [1.260in.], however, where no interference occurs.

● Solid state type

○ : Mountable △ : Either head side or rod side × : Unmountable — : Fully detectable within stroke


(mm)

Bore size	Mounting groove	$\phi 10$			$\phi 16$			$\phi 20$			$\phi 25$			$\phi 32$		
Stroke		A	B	C	A	B	C	A	B	C	A	B	C	A	B	C
10	Head side	○	○	○	×	△	△	○	○	△	○	△	△	×	△	△
	Rod side	×	×	×	×	△	△	×	×	△	○	△	△	×	△	△
20	Head side	○	○	○	×	○	○	○	○	△	○	△	△	×	○	△
	Rod side	○	×	×	○	×	×	○	×	△	○	△	△	○	×	△
30	Head side	○	○	○	×	○	○	○	○	△	○	○	○	×	○	○
	Rod side	○	×	×	○	×	×	○	×	△	○	×	×	○	×	×
40	Head side	○	○	○	×	○	○	○	○	△	○	○	○	×	○	○
	Rod side	○	×	×	○	×	×	○	×	△	○	×	×	○	×	×
50	Head side	○	○	○	×	○	○	○	○	△	○	○	○	×	○	○
	Rod side	○	○	○	○	○	○	○	×	×	○	○	○	○	×	○
60	Head side	○	○	○	×	○	○	○	○	△	○	○	○	×	○	○
	Rod side	○	○	○	○	○	○	○	○	△	○	○	○	○	○	○
70	Head side	○	○	○	×	○	○	○	○	△	○	○	○	×	○	○
	Rod side	○	○	○	○	○	○	○	○	△	○	○	○	○	○	○
80	Head side	○	○	○	×	○	○	○	○	△	○	○	○	×	○	○
	Rod side	○	○	○	○	○	○	○	○	△	○	○	○	○	○	○
90	Head side	○	○	○	×	○	○	○	○	△	○	○	○	×	○	○
	Rod side	○	○	○	○	○	○	○	○	△	○	○	○	○	○	○
100	Head side	○	○	○	×	○	○	○	○	△	○	○	○	×	○	○
	Rod side	○	○	○	○	○	○	○	○	△	○	○	○	○	○	○
110	Head side	○	○	○	×	○	○	○	○	△	○	○	○	×	○	○
	Rod side	○	○	○	○	○	○	○	○	△	○	○	○	○	○	○
120	Head side	○	○	○	×	○	○	○	○	△	○	○	○	×	○	○
	Rod side	○	○	○	○	○	○	○	○	△	○	○	○	○	○	○
130	Head side	○	○	○	×	○	○	○	○	△	○	○	○	×	○	○
	Rod side	○	○	○	○	○	○	○	○	△	○	○	○	○	○	○
140	Head side	○	○	○	×	○	○	○	○	△	○	○	○	×	○	○
	Rod side	○	○	○	○	○	○	○	○	△	○	○	○	○	○	○
150	Head side	○	○	○	×	○	○	○	○	△	○	○	○	×	○	○
	Rod side	○	○	○	○	○	○	○	○	△	○	○	○	○	○	○
160	Head side	○	○	○	×	○	○	○	○	△	○	○	○	×	○	○
	Rod side	○	○	○	○	○	○	○	○	△	○	○	○	○	○	○
170	Head side	○	○	○	×	○	○	○	○	△	○	○	○	×	○	○
	Rod side	○	○	○	○	○	○	○	○	△	○	○	○	○	○	○
180	Head side	○	○	○	×	○	○	○	○	△	○	○	○	×	○	○
	Rod side	○	○	○	○	○	○	○	○	△	○	○	○	○	○	○
190	Head side	○	○	○	×	○	○	○	○	△	○	○	○	×	○	○
	Rod side	○	○	○	○	○	○	○	○	△	○	○	○	○	○	○
200	Head side	○	○	○	×	○	○	○	○	△	○	○	○	×	○	○
	Rod side	○	○	○	○	○	○	○	○	△	○	○	○	○	○	○

Note: The undetectable stroke range appears due to interference between the sensor switch and the body mounting bolts.

■ Moving sensor switch

- Loosening the mounting screw allows the sensor switch to be moved along the switch mounting groove of the cylinder body.
- Tighten the mounting screw with a tightening torque of 0.1~0.2N·m [0.9~1.8in·lbf].

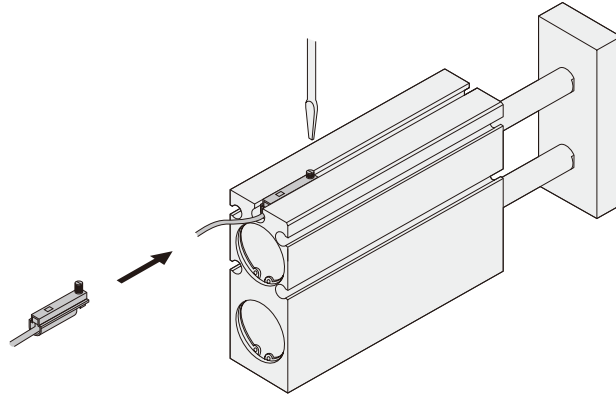

● Reed switch type

○ : Mountable △ : Either head side or rod side × : Unmountable — : Fully detectable within stroke

(mm)


Bore size	Mounting groove	φ 10			φ 16			φ 20			φ 25			φ 32		
Stroke		A	B	C	A	B	C	A	B	C	A	B	C	A	B	C
		E	D		E	D		E	D		E	D		E	D	
10	Head side	×	○	○	×	×	△	×	×	○	△	○	△	×	△	△
	Rod side	×	×	×	×	×	△	×	×	×	△	×	△	×	△	△
20	Head side	×	○	○	×	○	○	×	○	△	○	○	△	×	○	△
	Rod side	○	×	×	○	×	×	○	×	×	○	×	×	○	×	×
30	Head side	×	○	○	×	○	○	×	○	○	○	○	○	×	○	○
	Rod side	○	×	×	○	×	×	○	×	×	○	×	×	○	×	×
40	Head side	×	○	○	×	○	○	×	○	○	○	○	○	×	○	○
	Rod side	○	×	×	○	×	×	○	×	×	○	×	×	○	×	×
50	Head side	×	○	○	×	○	○	×	○	○	○	○	○	×	○	○
	Rod side	○	○	○	○	○	○	○	×	×	○	×	×	○	×	×
60	Head side	×	○	○	×	○	○	×	○	○	○	○	○	×	○	○
	Rod side	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○
70	Head side	×	○	○	×	○	○	×	○	○	○	○	○	×	○	○
	Rod side	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○
80	Head side	×	○	○	×	○	○	×	○	○	○	○	○	×	○	○
	Rod side	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○
90	Head side	×	○	○	×	○	○	×	○	○	○	○	○	×	○	○
	Rod side	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○
100	Head side	×	○	○	×	○	○	×	○	○	○	○	○	×	○	○
	Rod side	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○
110	Head side	×	○	○	×	○	○	×	○	○	○	○	○	×	○	○
	Rod side	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○
120	Head side	×	○	○	×	○	○	×	○	○	○	○	○	×	○	○
	Rod side	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○
130	Head side	×	○	○	×	○	○	×	○	○	○	○	○	×	○	○
	Rod side	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○
140	Head side	×	○	○	×	○	○	×	○	○	○	○	○	×	○	○
	Rod side	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○
150	Head side	×	○	○	×	○	○	×	○	○	○	○	○	×	○	○
	Rod side	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○
160	Head side	×	○	○	×	○	○	×	○	○	○	○	○	×	○	○
	Rod side	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○
170	Head side	×	○	○	×	○	○	×	○	○	○	○	○	×	○	○
	Rod side	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○
180	Head side	×	○	○	×	○	○	×	○	○	○	○	○	×	○	○
	Rod side	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○
190	Head side	×	○	○	×	○	○	×	○	○	○	○	○	×	○	○
	Rod side	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○
200	Head side	×	○	○	×	○	○	×	○	○	○	○	○	×	○	○
	Rod side	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○

Note: The undetectable stroke range appears due to interference between the sensor switch and the body mounting bolts.

Mountable or Unmountable Sensor Switch and Undetectable Stroke Range at End of Stroke


Double acting type (TBDA), single acting push type (TBSA)

In the case of using 2 center mounting holes on the body

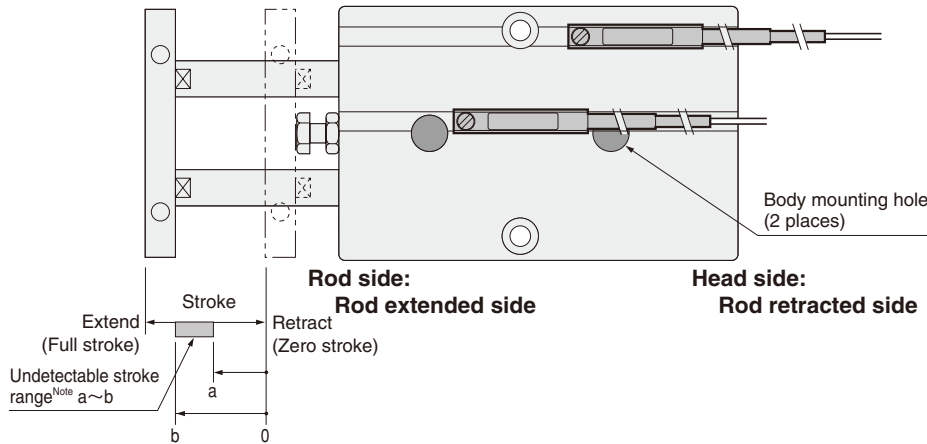

Note: The undetectable stroke range is the value measured from the zero stroke with 1 sensor switch installation.

● Sensor switch mounting surface



Mounting a sensor switch in any of the grooves **A~E** allows detection at either the head side or rod side stroke end, and intermediate positions. The diagram shows the rod side with the square plate removed.

Caution

When mounting a sensor switch in the **A** or **E** groove's rod extended side (the rod side of the body), ensure that the sensor switch is installed inside the groove between body mounting holes before tightening body mounting bolts, to avoid interference between the sensor switch and the bolts.

This procedure is not necessary for $\phi 25$ [0.984in.] and $\phi 32$ [1.260in.], however, where no interference occurs.

● Solid state type


○ : Mountable △ : Either head side or rod side × : Unmountable — : Fully detectable within stroke

(mm)

Bore size		$\phi 10$			$\phi 16$			$\phi 20$			$\phi 25$			$\phi 32$		
Stroke	Mounting groove	A	B	C	A	B	C	A	B	C	A	B	C	A	B	C
		E	D		E	D		E	D		E	D		E	D	
10	Head side	○	○	○	×	○	○	○	○	○	○	○	○	×	○	○
	Rod side	×	○	○	×	○	○	×	○	○	○	○	○	×	○	○
20	Head side	○	○	○	×	○	○	○	○	○	○	○	○	×	○	○
	Rod side	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○
30	Head side	○	○	○	×	○	○	○	○	○	○	○	○	×	○	○
	Rod side	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○
40	Head side	○	○	○	×	○	○	○	○	○	○	○	○	×	○	○
	Rod side	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○
50	Head side	○	○	○	×	○	○	○	○	○	○	○	○	×	○	○
	Rod side	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○
60	Head side	○	○	○	×	○	○	○	○	○	○	○	○	×	○	○
	Rod side	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○
70	Head side	○	○	○	×	○	○	○	○	○	○	○	○	×	○	○
	Rod side	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○
80	Head side	○	○	○	×	○	○	○	○	○	○	○	○	×	○	○
	Rod side	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○
90	Head side	○	○	○	×	○	○	○	○	○	○	○	○	×	○	○
	Rod side	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○
100	Head side	○	○	○	×	○	○	○	○	○	○	○	○	×	○	○
	Rod side	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○
110	Head side	○	○	○	×	○	○	○	○	○	○	○	○	×	○	○
	Rod side	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○
120	Head side	○	○	○	×	○	○	○	○	○	○	○	○	×	○	○
	Rod side	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○
130	Head side	○	○	○	×	○	○	○	○	○	○	○	○	×	○	○
	Rod side	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○
140	Head side	○	○	○	×	○	○	○	○	○	○	○	○	×	○	○
	Rod side	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○
150	Head side	○	○	○	×	○	○	○	○	○	○	○	○	×	○	○
	Rod side	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○
160	Head side	○	○	○	×	○	○	○	○	○	○	○	○	×	○	○
	Rod side	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○
170	Head side	○	○	○	×	○	○	○	○	○	○	○	○	×	○	○
	Rod side	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○
180	Head side	○	○	○	×	○	○	○	○	○	○	○	○	×	○	○
	Rod side	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○
190	Head side	○	○	○	×	○	○	○	○	○	○	○	○	×	○	○
	Rod side	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○
200	Head side	○	○	○	×	○	○	○	○	○	○	○	○	×	○	○
	Rod side	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○

Note: The undetectable stroke range appears due to interference between the sensor switch and the body mounting bolts.

- Loosening the mounting screw allows the sensor switch to be moved along the switch mounting groove of the cylinder body.
- Tighten the mounting screw with a tightening torque of 0.1~0.2N·m [0.9~1.8in·lbf].

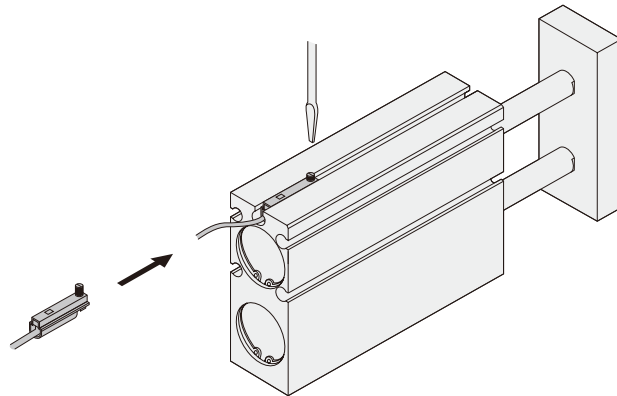

● Reed switch type

○ : Mountable △ : Either head side or rod side × : Unmountable — : Fully detectable within stroke

(mm)


[illegible]

Note: The undetectable stroke range appears due to interference between the sensor switch and the body mounting bolts.


Mountable or Unmountable Sensor Switch and Undetectable Stroke Range at End of Stroke

Double acting type (TBDA), single acting push type (TBSA)

■ In the case of using 2 mounting holes on the body
(one on each side)

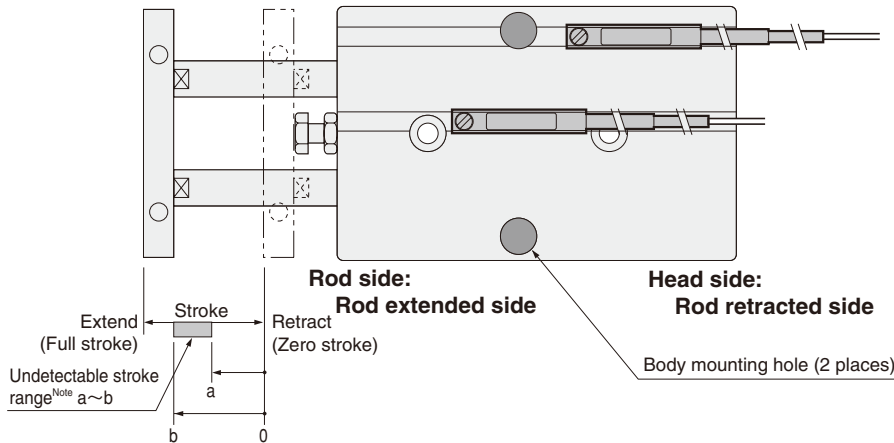

● Sensor switch mounting surface



Mounting a sensor switch in any of the grooves A~E allows detection at either the head side or rod side stroke end, and intermediate positions. The diagram shows the rod side with the square plate removed.

Note: The undetectable stroke range is the value measured from the zero stroke with 1 sensor switch installation.

● Solid state type

○ : Mountable △ : Either head side or rod side × : Unmountable — : Fully detectable within stroke


(mm)

Bore size	Mounting groove	A	B	C	Undetectable stroke range of sensor switch	A	B	C	Undetectable stroke range of sensor switch	A	B	C	Undetectable stroke range of sensor switch	A	B	C	Undetectable stroke range of sensor switch	A	B	C	Undetectable stroke range of sensor switch
Stroke		E	D			E	D			E	D			E	D			E	D		
10	Head side	○	○	○	Groove A (E) : — Groove B (D) : 7~10 Groove C : 8~10	○	△	△	Groove A (E) : — Groove B (D) : 8~10 Groove C : —	△	○	△	Groove A (E) : — Groove B (D) : 8~10 Groove C : —	○	△	△	Groove A (E) : — Groove B (D) : 9~10 Groove C : —	○	△	△	Groove A (E) : — Groove B (D) : 9~10 Groove C : —
	Rod side	○	×	×		○	△	△		△	×	×		○	△	△		○	△	△	
20	Head side	○	○	○	Groove A (E) : — Groove B (D) : 17~20 Groove C : 18~20	○	○	○	Groove A (E) : — Groove B (D) : 17~20 Groove C : 19~20	○	○	△	Groove A (E) : — Groove B (D) : 18~20 Groove C : —	○	△	△	Groove A (E) : — Groove B (D) : 19~20 Groove C : —	○	△	△	Groove A (E) : — Groove B (D) : 19~20 Groove C : —
	Rod side	○	×	×		○	×	×		○	×	×		○	×	×		○	×	×	
30	Head side	○	○	○	Groove A (E) : — Groove B (D) : 21~30 Groove C : 22~30	○	○	○	Groove A (E) : — Groove B (D) : 22~30 Groove C : 24~30	○	○	○	Groove A (E) : — Groove B (D) : 26~30 Groove C : 28~30	○	○	○	Groove A (E) : — Groove B (D) : 27~30 Groove C : 28~30	○	○	○	Groove A (E) : — Groove B (D) : 27~30 Groove C : 28~30
	Rod side	○	×	×		○	×	×		○	×	×		○	×	×		○	×	×	
40	Head side	○	○	○	Groove A (E) : — Groove B (D) : 27~40 Groove C : 28~40	○	○	○	Groove A (E) : — Groove B (D) : 27~40 Groove C : 29~40	○	○	○	Groove A (E) : — Groove B (D) : 31~40 Groove C : 33~40	○	○	○	Groove A (E) : — Groove B (D) : 32~40 Groove C : 33~40	○	○	○	Groove A (E) : — Groove B (D) : 32~40 Groove C : 33~40
	Rod side	○	×	×		○	×	×		○	×	×		○	×	×		○	×	×	
50	Head side	○	○	○	Groove A (E) : — Groove B (D) : 32~45 Groove C : 33~44	○	○	○	Groove A (E) : — Groove B (D) : 32~46 Groove C : 34~44	○	○	○	Groove A (E) : — Groove B (D) : 36~50 Groove C : 38~50	○	○	○	Groove A (E) : — Groove B (D) : 37~49 Groove C : 38~48	○	○	○	Groove A (E) : — Groove B (D) : 37~49 Groove C : 38~48
	Rod side	○	○	○		○	○	○		○	×	×		○	○	○		○	×	×	
60	Head side	○	○	○	Groove A (E) : — Groove B (D) : 37~50 Groove C : 38~49	○	○	○	Groove A (E) : — Groove B (D) : 37~51 Groove C : 39~49	○	○	○	Groove A (E) : — Groove B (D) : 41~57 Groove C : 43~55	○	○	○	Groove A (E) : — Groove B (D) : 42~54 Groove C : 43~53	○	○	○	Groove A (E) : — Groove B (D) : 42~54 Groove C : 43~53
	Rod side	○	○	○		○	○	○		○	○	○		○	○	○		○	○	○	
70	Head side	○	○	○	Groove A (E) : — Groove B (D) : 42~55 Groove C : 43~54	○	○	○	Groove A (E) : — Groove B (D) : 42~56 Groove C : 44~54	○	○	○	Groove A (E) : — Groove B (D) : 46~62 Groove C : 48~60	○	○	○	Groove A (E) : — Groove B (D) : 47~59 Groove C : 48~58	○	○	○	Groove A (E) : — Groove B (D) : 47~59 Groove C : 48~58
	Rod side	○	○	○		○	○	○		○	○	○		○	○	○		○	○	○	
80	Head side	○	○	○	Groove A (E) : — Groove B (D) : 47~60 Groove C : 48~59	○	○	○	Groove A (E) : — Groove B (D) : 47~61 Groove C : 49~59	○	○	○	Groove A (E) : — Groove B (D) : 51~67 Groove C : 53~65	○	○	○	Groove A (E) : — Groove B (D) : 52~64 Groove C : 53~63	○	○	○	Groove A (E) : — Groove B (D) : 52~64 Groove C : 53~63
	Rod side	○	○	○		○	○	○		○	○	○		○	○	○		○	○	○	
90	Head side	○	○	○	Groove A (E) : — Groove B (D) : 52~65 Groove C : 53~64	○	○	○	Groove A (E) : — Groove B (D) : 52~66 Groove C : 54~64	○	○	○	Groove A (E) : — Groove B (D) : 56~72 Groove C : 58~70	○	○	○	Groove A (E) : — Groove B (D) : 57~69 Groove C : 58~68	○	○	○	Groove A (E) : — Groove B (D) : 57~69 Groove C : 58~68
	Rod side	○	○	○		○	○	○		○	○	○		○	○	○		○	○	○	
100	Head side	○	○	○	Groove A (E) : — Groove B (D) : 57~70 Groove C : 58~69	○	○	○	Groove A (E) : — Groove B (D) : 57~71 Groove C : 59~69	○	○	○	Groove A (E) : — Groove B (D) : 61~77 Groove C : 63~75	○	○	○	Groove A (E) : — Groove B (D) : 62~74 Groove C : 63~73	○	○	○	Groove A (E) : — Groove B (D) : 62~74 Groove C : 63~73
	Rod side	○	○	○		○	○	○		○	○	○		○	○	○		○	○	○	
110	Head side	○	○	○	Groove A (E) : — Groove B (D) : 62~75 Groove C : 63~74	○	○	○	Groove A (E) : — Groove B (D) : 62~76 Groove C : 64~74	○	○	○	Groove A (E) : — Groove B (D) : 66~82 Groove C : 68~80	○	○	○	Groove A (E) : — Groove B (D) : 67~79 Groove C : 68~78	○	○	○	Groove A (E) : — Groove B (D) : 67~79 Groove C : 68~78
	Rod side	○	○	○		○	○	○		○	○	○		○	○	○		○	○	○	
120	Head side	○	○	○	Groove A (E) : — Groove B (D) : 67~80 Groove C : 68~79	○	○	○	Groove A (E) : — Groove B (D) : 67~81 Groove C : 69~79	○	○	○	Groove A (E) : — Groove B (D) : 71~87 Groove C : 73~85	○	○	○	Groove A (E) : — Groove B (D) : 72~84 Groove C : 72~84	○	○	○	Groove A (E) : — Groove B (D) : 72~84 Groove C : 73~83
	Rod side	○	○	○		○	○	○		○	○	○		○	○	○		○	○	○	
130	Head side	○	○	○	Groove A (E) : — Groove B (D) : 72~85 Groove C : 73~84	○	○	○	Groove A (E) : — Groove B (D) : 72~86 Groove C : 74~84	○	○	○	Groove A (E) : — Groove B (D) : 76~92 Groove C : 78~90	○	○	○	Groove A (E) : — Groove B (D) : 77~89 Groove C : 78~88	○	○	○	Groove A (E) : — Groove B (D) : 77~89 Groove C : 78~88
	Rod side	○	○	○		○	○	○		○	○	○		○	○	○		○	○	○	
140	Head side	○	○	○	Groove A (E) : — Groove B (D) : 77~90 Groove C : 78~89	○	○	○	Groove A (E) : — Groove B (D) : 77~91 Groove C : 79~89	○	○	○	Groove A (E) : — Groove B (D) : 81~97 Groove C : 83~95	○	○	○	Groove A (E) : — Groove B (D) : 82~94 Groove C : 83~93	○	○	○	Groove A (E) : — Groove B (D) : 82~94 Groove C : 83~93
	Rod side	○	○	○		○	○	○		○	○	○		○	○	○		○	○	○	
150	Head side	○	○	○	Groove A (E) : — Groove B (D) : 82~96 Groove C : 84~94	○	○	○	Groove A (E) : — Groove B (D) : 82~96 Groove C : 84~94	○	○	○	Groove A (E) : — Groove B (D) : 86~102 Groove C : 88~100	○	○	○	Groove A (E) : — Groove B (D) : 87~99 Groove C : 88~98	○	○	○	Groove A (E) : — Groove B (D) : 87~99 Groove C : 88~98
	Rod side	○	○	○		○	○	○		○	○	○		○	○	○		○	○	○	
160	Head side	○	○	○	Groove A (E) : — Groove B (D) : 87~101 Groove C : 89~99	○	○	○	Groove A (E) : — Groove B (D) : 87~101 Groove C : 89~99	○	○	○	Groove A (E) : — Groove B (D) : 91~107 Groove C : 93~105	○	○	○	Groove A (E) : — Groove B (D) : 92~104 Groove C : 93~103	○	○	○	Groove A (E) : — Groove B (D) : 92~104 Groove C : 93~103
	Rod side	○	○	○		○	○	○		○	○	○		○	○	○		○	○	○	
170	Head side	○	○	○	Groove A (E) : — Groove B (D) : 92~106 Groove C : 94~104	○	○	○	Groove A (E) : — Groove B (D) : 92~106 Groove C : 94~104	○	○	○	Groove A (E) : — Groove B (D) : 96~112 Groove C : 98~110	○	○	○	Groove A (E) : — Groove B (D) : 97~109 Groove C : 98~108	○	○	○	Groove A (E) : — Groove B (D) : 97~109 Groove C : 98~108
	Rod side	○	○	○		○	○	○		○	○	○		○	○	○		○	○	○	
180	Head side	○	○	○	Groove A (E) : — Groove B (D) : 97~111 Groove C : 99~109	○	○	○	Groove A (E) : — Groove B (D) : 97~111 Groove C : 99~109	○	○	○	Groove A (E) : — Groove B (D) : 101~117 Groove C : 103~115	○	○	○	Groove A (E) : — Groove B (D) : 102~114 Groove C : 103~113	○	○	○	Groove A (E) : — Groove B (D) : 102~114 Groove C : 103~113
	Rod side	○	○	○		○	○	○		○	○	○		○	○	○		○	○	○	
190	Head side	○	○	○	Groove A (E) : — Groove B (D) : 102~116 Groove C : 104~114	○	○	○	Groove A (E) : — Groove B (D) : 102~116 Groove C : 104~114	○	○	○	Groove A (E) : — Groove B (D) : 106~122 Groove C : 108~120	○	○	○	Groove A (E) : — Groove B (D) : 107~119 Groove C : 108~118	○	○	○	Groove A (E) : — Groove B (D) : 107~119 Groove C : 108~118
	Rod side	○	○	○		○	○	○		○	○	○		○	○	○		○	○	○	
200	Head side	○	○	○	Groove A (E) : — Groove B (D) : 107~121 Groove C : 109~119	○	○	○	Groove A (E) : — Groove B (D) : 107~121 Groove C : 109~119	○	○	○	Groove A (E) : — Groove B (D) : 111~127 Groove C : 113~125	○	○	○	Groove A (E) : — Groove B (D) : 112~124 Groove C : 113~123	○	○	○	Groove A (E) : — Groove B (D) : 112~124 Groove C : 113~123
	Rod side	○	○	○		○	○	○		○	○	○		○	○	○		○	○	○	

Note: The undetectable stroke range appears due to interference between the sensor switch and the body mounting bolts.

■ Moving sensor switch

- Loosening the mounting screw allows the sensor switch to be moved along the switch mounting groove of the cylinder body.
- Tighten the mounting screw with a tightening torque of 0.1~0.2N·m [0.9~1.8in·lbf].

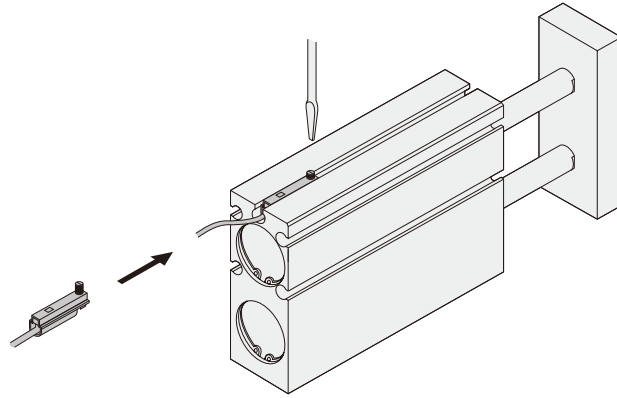

● Reed switch type

○ : Mountable △ : Either head side or rod side × : Unmountable — : Fully detectable within stroke

(mm)

Bore size	Stroke	Mounting groove	φ 10			Undetectable stroke range of sensor switch	φ 16			Undetectable stroke range of sensor switch	φ 20			Undetectable stroke range of sensor switch	φ 25			Undetectable stroke range of sensor switch	φ 32			Undetectable stroke range of sensor switch
			A	B	C		A	B	C		A	B	C		A	B	C		A	B	C	
10	Head side	△	○	○	○	Groove A (E) : — Groove B (D) : 5~10 Groove C : 6~10	△	×	△	Groove A (E) : — Groove B (D) : 8~10 Groove C : —	△	○	○	Groove A (E) : — Groove B (D) : 8~10 Groove C : 10	△	○	△	Groove A (E) : — Groove B (D) : C : —	△	△	△	Groove A (E) : — Groove B (D) : 9~10 Groove C : —
	Rod side	△	×	×	×		△	×	△		△	×	×		△	×	△		△	△	△	
20	Head side	○	○	○	○	Groove A (E) : — Groove B (D) : 15~20 Groove C : 16~20	○	○	○	Groove A (E) : — Groove B (D) : 15~20 Groove C : 17~20	○	○	△	Groove A (E) : — Groove B (D) : 18~20 Groove C : —	○	○	△	Groove A (E) : — Groove B (D) : C : —	○	○	△	Groove A (E) : — Groove B (D) : 19~20 Groove C : —
	Rod side	○	×	×	×		○	×	×		○	×	△		○	×	△		○	×	△	
30	Head side	○	○	○	○	Groove A (E) : — Groove B (D) : 19~30 Groove C : 20~30	○	○	○	Groove A (E) : — Groove B (D) : 20~30 Groove C : 22~30	○	○	○	Groove A (E) : — Groove B (D) : 24~30 Groove C : 26~30	○	○	○	Groove A (E) : — Groove B (D) : C : 26~30	○	○	○	Groove A (E) : — Groove B (D) : 27~30 Groove C : 28~30
	Rod side	○	×	×	×		○	×	×		○	×	×		○	×	×		○	×	×	
40	Head side	○	○	○	○	Groove A (E) : — Groove B (D) : 25~40 Groove C : 26~40	○	○	○	Groove A (E) : — Groove B (D) : 25~40 Groove C : 27~40	○	○	○	Groove A (E) : — Groove B (D) : 29~40 Groove C : 31~40	○	○	○	Groove A (E) : — Groove B (D) : C : 31~40	○	○	○	Groove A (E) : — Groove B (D) : 32~40 Groove C : 33~40
	Rod side	○	×	×	×		○	×	×		○	×	×		○	×	×		○	×	×	
50	Head side	○	○	○	○	Groove A (E) : — Groove B (D) : 30~47 Groove C : 31~46	○	○	○	Groove A (E) : — Groove B (D) : 30~49 Groove C : 32~47	○	○	○	Groove A (E) : — Groove B (D) : 34~50 Groove C : 36~50	○	○	○	Groove A (E) : — Groove B (D) : C : 36~50	○	○	○	Groove A (E) : — Groove B (D) : 37~49 Groove C : 38~48
	Rod side	○	○	○	○		○	○	○		○	×	×		○	×	×		○	×	×	
60	Head side	○	○	○	○	Groove A (E) : — Groove B (D) : 35~52 Groove C : 36~51	○	○	○	Groove A (E) : — Groove B (D) : 35~54 Groove C : 37~52	○	○	○	Groove A (E) : — Groove B (D) : 39~59 Groove C : 41~57	○	○	○	Groove A (E) : — Groove B (D) : C : 41~56	○	○	○	Groove A (E) : — Groove B (D) : 42~54 Groove C : 43~53
	Rod side	○	○	○	○		○	○	○		○	○	○		○	○	○		○	○	○	
70	Head side	○	○	○	○	Groove A (E) : — Groove B (D) : 40~57 Groove C : 41~56	○	○	○	Groove A (E) : — Groove B (D) : 40~59 Groove C : 42~57	○	○	○	Groove A (E) : — Groove B (D) : 44~64 Groove C : 46~62	○	○	○	Groove A (E) : — Groove B (D) : C : 46~61	○	○	○	Groove A (E) : — Groove B (D) : 47~59 Groove C : 48~58
	Rod side	○	○	○	○		○	○	○		○	○	○		○	○	○		○	○	○	
80	Head side	○	○	○	○	Groove A (E) : — Groove B (D) : 45~62 Groove C : 46~61	○	○	○	Groove A (E) : — Groove B (D) : 45~64 Groove C : 47~62	○	○	○	Groove A (E) : — Groove B (D) : 49~69 Groove C : 51~67	○	○	○	Groove A (E) : — Groove B (D) : C : 51~66	○	○	○	Groove A (E) : — Groove B (D) : 52~64 Groove C : 53~63
	Rod side	○	○	○	○		○	○	○		○	○	○		○	○	○		○	○	○	
90	Head side	○	○	○	○	Groove A (E) : — Groove B (D) : 50~67 Groove C : 51~66	○	○	○	Groove A (E) : — Groove B (D) : 50~69 Groove C : 52~67	○	○	○	Groove A (E) : — Groove B (D) : 54~74 Groove C : 56~72	○	○	○	Groove A (E) : — Groove B (D) : C : 56~71	○	○	○	Groove A (E) : — Groove B (D) : 57~69 Groove C : 58~68
	Rod side	○	○	○	○		○	○	○		○	○	○		○	○	○		○	○	○	
100	Head side	○	○	○	○	Groove A (E) : — Groove B (D) : 55~72 Groove C : 56~71	○	○	○	Groove A (E) : — Groove B (D) : 55~74 Groove C : 57~72	○	○	○	Groove A (E) : — Groove B (D) : 59~79 Groove C : 61~77	○	○	○	Groove A (E) : — Groove B (D) : C : 61~76	○	○	○	Groove A (E) : — Groove B (D) : 62~74 Groove C : 63~73
	Rod side	○	○	○	○		○	○	○		○	○	○		○	○	○		○	○	○	
110	Head side	○	○	○	○	Groove A (E) : — Groove B (D) : 60~77 Groove C : 61~76	○	○	○	Groove A (E) : — Groove B (D) : 60~79 Groove C : 62~77	○	○	○	Groove A (E) : — Groove B (D) : 64~84 Groove C : 66~82	○	○	○	Groove A (E) : — Groove B (D) : C : 66~81	○	○	○	Groove A (E) : — Groove B (D) : 67~79 Groove C : 68~78
	Rod side	○	○	○	○		○	○	○		○	○	○		○	○	○		○	○	○	
120	Head side	○	○	○	○	Groove A (E) : — Groove B (D) : 65~82 Groove C : 66~81	○	○	○	Groove A (E) : — Groove B (D) : 65~84 Groove C : 67~82	○	○	○	Groove A (E) : — Groove B (D) : 69~89 Groove C : 71~87	○	○	○	Groove A (E) : — Groove B (D) : C : 71~86	○	○	○	Groove A (E) : — Groove B (D) : 72~84 Groove C : 73~83
	Rod side	○	○	○	○		○	○	○		○	○	○		○	○	○		○	○	○	
130	Head side	○	○	○	○	Groove A (E) : — Groove B (D) : 70~87 Groove C : 71~86	○	○	○	Groove A (E) : — Groove B (D) : 70~89 Groove C : 72~87	○	○	○	Groove A (E) : — Groove B (D) : 74~94 Groove C : 76~92	○	○	○	Groove A (E) : — Groove B (D) : C : 76~91	○	○	○	Groove A (E) : — Groove B (D) : 77~89 Groove C : 78~88
	Rod side	○	○	○	○		○	○	○		○	○	○		○	○	○		○	○	○	
140	Head side	○	○	○	○	Groove A (E) : — Groove B (D) : 75~92 Groove C : 76~91	○	○	○	Groove A (E) : — Groove B (D) : 75~94 Groove C : 77~92	○	○	○	Groove A (E) : — Groove B (D) : 79~99 Groove C : 81~97	○	○	○	Groove A (E) : — Groove B (D) : C : 81~96	○	○	○	Groove A (E) : — Groove B (D) : 82~94 Groove C : 83~93
	Rod side	○	○	○	○		○	○	○		○	○	○		○	○	○		○	○	○	
150	Head side	△	△	△	△		○	○	○	Groove A (E) : — Groove B (D) : 80~99 Groove C : 82~97	○	○	○	Groove A (E) : — Groove B (D) : 84~104 Groove C : 86~102	○	○	○	Groove A (E) : — Groove B (D) : C : 86~101	○	○	○	Groove A (E) : — Groove B (D) : 87~99 Groove C : 88~98
	Rod side	△	△	△	△		○	○	○		○	○	○		○	○	○		○	○	○	
160	Head side	△	△	△	△		○	○	○	Groove A (E) : — Groove B (D) : 85~104 Groove C : 87~102	○	○	○	Groove A (E) : — Groove B (D) : 89~109 Groove C : 91~107	○	○	○	Groove A (E) : — Groove B (D) : C : 91~106	○	○	○	Groove A (E) : — Groove B (D) : 92~104 Groove C : 93~103
	Rod side	△	△	△	△		○	○	○		○	○	○		○	○	○		○	○	○	
170	Head side	△	△	△	△		○	○	○	Groove A (E) : — Groove B (D) : 90~109 Groove C : 92~107	○	○	○	Groove A (E) : — Groove B (D) : 94~114 Groove C : 96~112	○	○	○	Groove A (E) : — Groove B (D) : C : 96~111	○	○	○	Groove A (E) : — Groove B (D) : 97~109 Groove C : 98~108
	Rod side	△	△	△	△		○	○	○		○	○	○		○	○	○		○	○	○	
180	Head side	△	△	△	△		○	○	○	Groove A (E) : — Groove B (D) : 95~114 Groove C : 97~112	○	○	○	Groove A (E) : — Groove B (D) : 99~119 Groove C : 101~117	○	○	○	Groove A (E) : — Groove B (D) : C : 101~116	○	○	○	Groove A (E) : — Groove B (D) : 102~114 Groove C : 103~113
	Rod side	△	△	△	△		○	○	○		○	○	○		○	○	○		○	○	○	
190	Head side	△	△	△	△		○	○	○	Groove A (E) : — Groove B (D) : 100~119 Groove C : 102~117	○	○	○	Groove A (E) : — Groove B (D) : 104~124 Groove C : 106~122	○	○	○	Groove A (E) : — Groove B (D) : C : 106~121	○	○	○	Groove A (E) : — Groove B (D) : 107~119 Groove C : 108~118
	Rod side	△	△	△	△		○	○	○		○	○	○		○	○	○		○	○	○	
200	Head side	△	△	△	△		○	○	○	Groove A (E) : — Groove B (D) : 105~124 Groove C : 107~122	○	○	○	Groove A (E) : — Groove B (D) : 109~129 Groove C : 111~127	○	○	○	Groove A (E) : — Groove B (D) : C : 111~126	○	○	○	Groove A (E) : — Groove B (D) : 112~124 Groove C : 113~123
	Rod side	△	△	△	△		○	○	○		○	○	○		○	○	○		○	○	○	



Note: The undetectable stroke range appears due to interference between the sensor switch and the body mounting bolts.

Mountable or Unmountable Sensor Switch and Undetectable Stroke Range at End of Stroke

Double acting type (TBDA), single acting push type (TBSA)

■ In the case of using 3 head side mounting holes on the body

● Sensor switch mounting surface

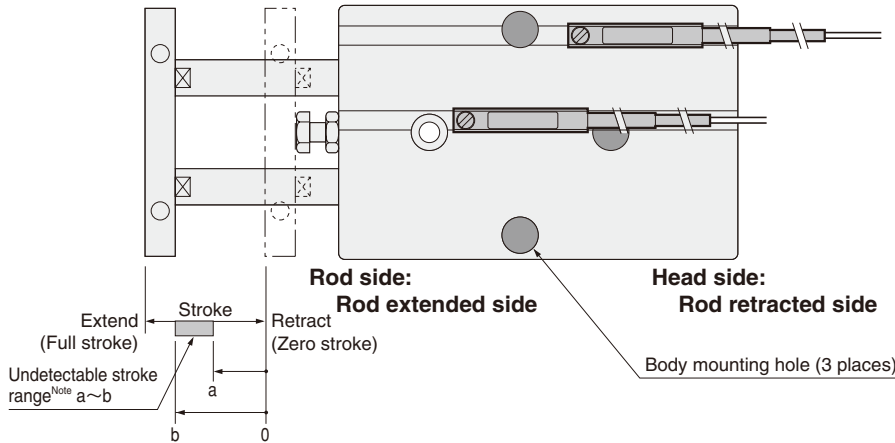

Mounting a sensor switch in any of the grooves A~E allows detection at either the head side or rod side stroke end, and intermediate positions. The diagram shows the rod side with the square plate removed.

Note: The undetectable stroke range is the value measured from the zero stroke with 1 sensor switch installation.

● Solid state type

○ : Mountable △ : Either head side or rod side × : Unmountable — : Fully detectable within stroke


(mm)

Bore size	Mounting groove	A	B	C	Undetectable stroke range of sensor switch	A	B	C	Undetectable stroke range of sensor switch	A	B	C	Undetectable stroke range of sensor switch	A	B	C	Undetectable stroke range of sensor switch	A	B	C	Undetectable stroke range of sensor switch
Stroke		E	D			E	D			E	D			E	D			E	D		
10	Head side	○	○	○	Groove A (E) : 2~10 Groove B (D) : 7~10 Groove C : 8~10	×	△	△	Groove A (E) : 0~10 Groove B (D) : 8~10 Groove C : —	○	○	△	Groove A (E) : 2~10 Groove B (D) : 8~10 Groove C : —	○	○	△	Groove A (E) : — Groove B (D), C : —	×	△	△	Groove A (E) : 0~10 Groove B (D) : 9~10 Groove C : —
	Rod side	×	×	×		×	△	△		×	×	×		○	△	△		×	△	△	
20	Head side	○	○	○	Groove A (E) : 2~16 Groove B (D) : 17~20 Groove C : 18~20	×	○	○	Groove A (E) : 0~12 Groove B (D) : 17~20 Groove C : 19~20	○	○	△	Groove A (E) : 2~15 Groove B (D) : 18~20 Groove C : —	○	△	△	Groove A (E) : — Groove B (D), C : —	×	○	△	Groove A (E) : 0~14 Groove B (D) : 19~20 Groove C : —
	Rod side	○	×	×		○	×	×		○	×	×		○	×	×		○	×	×	
30	Head side	○	○	○	Groove A (E) : 2~16 Groove B (D) : 21~30 Groove C : 22~30	×	○	○	Groove A (E) : 0~12 Groove B (D) : 22~30 Groove C : 24~30	○	○	○	Groove A (E) : 2~15 Groove B (D) : 26~30 Groove C : 28~30	○	○	○	Groove A (E) : — Groove B (D), C : 27~30	×	○	○	Groove A (E) : 0~14 Groove B (D) : 27~30 Groove C : 28~30
	Rod side	○	×	×		○	×	×		○	×	×		○	×	×		○	×	×	
40	Head side	○	○	○	Groove A (E) : 2~16 Groove B (D) : 27~40 Groove C : 28~40	×	○	○	Groove A (E) : 0~12 Groove B (D) : 27~40 Groove C : 29~40	○	○	○	Groove A (E) : 2~15 Groove B (D) : 31~40 Groove C : 33~40	○	○	○	Groove A (E) : — Groove B (D), C : 32~40	×	○	○	Groove A (E) : 0~14 Groove B (D) : 32~40 Groove C : 33~40
	Rod side	○	×	×		○	×	×		○	×	×		○	×	×		○	×	×	
50	Head side	○	○	○	Groove A (E) : 2~16 Groove B (D) : 32~45 Groove C : 33~44	×	○	○	Groove A (E) : 0~12 Groove B (D) : 32~46 Groove C : 34~44	○	○	○	Groove A (E) : 2~15 Groove B (D) : 36~50 Groove C : 38~50	○	○	○	Groove A (E) : — Groove B (D), C : 37~49	×	○	○	Groove A (E) : 0~14 Groove B (D) : 37~49 Groove C : 38~48
	Rod side	○	○	○		○	○	○		○	×	×		○	×	×		○	×	×	
60	Head side	○	○	○	Groove A (E) : 2~16 Groove B (D) : 37~50 Groove C : 38~49	×	○	○	Groove A (E) : 0~12 Groove B (D) : 37~51 Groove C : 39~49	○	○	○	Groove A (E) : 2~15 Groove B (D) : 41~57 Groove C : 43~55	○	○	○	Groove A (E) : — Groove B (D), C : 42~54	×	○	○	Groove A (E) : 0~14 Groove B (D) : 42~54 Groove C : 43~53
	Rod side	○	○	○		○	○	○		○	○	○		○	○	○		○	○	○	
70	Head side	○	○	○	Groove A (E) : 2~16 Groove B (D) : 42~55 Groove C : 43~54	×	○	○	Groove A (E) : 0~12 Groove B (D) : 42~56 Groove C : 44~54	○	○	○	Groove A (E) : 2~15 Groove B (D) : 46~62 Groove C : 48~60	○	○	○	Groove A (E) : — Groove B (D), C : 47~59	×	○	○	Groove A (E) : 0~14 Groove B (D) : 47~59 Groove C : 48~58
	Rod side	○	○	○		○	○	○		○	○	○		○	○	○		○	○	○	
80	Head side	○	○	○	Groove A (E) : 2~16 Groove B (D) : 47~60 Groove C : 48~59	×	○	○	Groove A (E) : 0~12 Groove B (D) : 47~61 Groove C : 49~59	○	○	○	Groove A (E) : 2~15 Groove B (D) : 51~67 Groove C : 53~65	○	○	○	Groove A (E) : — Groove B (D), C : 52~64	×	○	○	Groove A (E) : 0~14 Groove B (D) : 52~64 Groove C : 53~63
	Rod side	○	○	○		○	○	○		○	○	○		○	○	○		○	○	○	
90	Head side	○	○	○	Groove A (E) : 2~16 Groove B (D) : 52~65 Groove C : 53~64	×	○	○	Groove A (E) : 0~12 Groove B (D) : 52~66 Groove C : 54~64	○	○	○	Groove A (E) : 2~15 Groove B (D) : 56~72 Groove C : 58~70	○	○	○	Groove A (E) : — Groove B (D), C : 57~69	×	○	○	Groove A (E) : 0~14 Groove B (D) : 57~69 Groove C : 58~68
	Rod side	○	○	○		○	○	○		○	○	○		○	○	○		○	○	○	
100	Head side	○	○	○	Groove A (E) : 2~16 Groove B (D) : 57~70 Groove C : 58~69	×	○	○	Groove A (E) : 0~12 Groove B (D) : 57~71 Groove C : 59~69	○	○	○	Groove A (E) : 2~15 Groove B (D) : 61~77 Groove C : 63~75	○	○	○	Groove A (E) : — Groove B (D), C : 62~74	×	○	○	Groove A (E) : 0~14 Groove B (D) : 62~74 Groove C : 63~73
	Rod side	○	○	○		○	○	○		○	○	○		○	○	○		○	○	○	
110	Head side	○	○	○	Groove A (E) : 2~16 Groove B (D) : 62~75 Groove C : 63~74	×	○	○	Groove A (E) : 0~12 Groove B (D) : 62~76 Groove C : 64~74	○	○	○	Groove A (E) : 2~15 Groove B (D) : 66~82 Groove C : 68~80	○	○	○	Groove A (E) : — Groove B (D), C : 67~79	×	○	○	Groove A (E) : 0~14 Groove B (D) : 67~79 Groove C : 68~78
	Rod side	○	○	○		○	○	○		○	○	○		○	○	○		○	○	○	
120	Head side	○	○	○	Groove A (E) : 2~16 Groove B (D) : 67~80 Groove C : 68~79	×	○	○	Groove A (E) : 0~12 Groove B (D) : 67~81 Groove C : 69~79	○	○	○	Groove A (E) : 2~15 Groove B (D) : 71~87 Groove C : 73~85	○	○	○	Groove A (E) : — Groove B (D), C : 72~84	×	○	○	Groove A (E) : 0~14 Groove B (D) : 72~84 Groove C : 73~83
	Rod side	○	○	○		○	○	○		○	○	○		○	○	○		○	○	○	
130	Head side	○	○	○	Groove A (E) : 2~16 Groove B (D) : 72~85 Groove C : 73~84	×	○	○	Groove A (E) : 0~12 Groove B (D) : 72~86 Groove C : 74~84	○	○	○	Groove A (E) : 2~15 Groove B (D) : 76~92 Groove C : 78~90	○	○	○	Groove A (E) : — Groove B (D), C : 77~89	×	○	○	Groove A (E) : 0~14 Groove B (D) : 77~89 Groove C : 78~88
	Rod side	○	○	○		○	○	○		○	○	○		○	○	○		○	○	○	
140	Head side	○	○	○	Groove A (E) : 2~16 Groove B (D) : 77~90 Groove C : 78~89	×	○	○	Groove A (E) : 0~12 Groove B (D) : 77~91 Groove C : 79~89	○	○	○	Groove A (E) : 2~15 Groove B (D) : 81~97 Groove C : 83~95	○	○	○	Groove A (E) : — Groove B (D), C : 82~94	×	○	○	Groove A (E) : 0~14 Groove B (D) : 82~94 Groove C : 83~93
	Rod side	○	○	○		○	○	○		○	○	○		○	○	○		○	○	○	
150	Head side	○	○	○	Groove A (E) : 2~16 Groove B (D) : 82~96 Groove C : 84~94	×	○	○	Groove A (E) : 0~12 Groove B (D) : 82~96 Groove C : 84~94	○	○	○	Groove A (E) : 2~15 Groove B (D) : 86~102 Groove C : 88~100	○	○	○	Groove A (E) : — Groove B (D), C : 87~99	×	○	○	Groove A (E) : 0~14 Groove B (D) : 87~99 Groove C : 88~98
	Rod side	○	○	○		○	○	○		○	○	○		○	○	○		○	○	○	
160	Head side	○	○	○	Groove A (E) : 2~16 Groove B (D) : 87~101 Groove C : 89~99	×	○	○	Groove A (E) : 0~12 Groove B (D) : 87~101 Groove C : 89~99	○	○	○	Groove A (E) : 2~15 Groove B (D) : 91~107 Groove C : 93~105	○	○	○	Groove A (E) : — Groove B (D), C : 92~104	×	○	○	Groove A (E) : 0~14 Groove B (D) : 92~104 Groove C : 93~103
	Rod side	○	○	○		○	○	○		○	○	○		○	○	○		○	○	○	
170	Head side	○	○	○	Groove A (E) : 2~16 Groove B (D) : 92~106 Groove C : 94~104	×	○	○	Groove A (E) : 0~12 Groove B (D) : 92~106 Groove C : 94~104	○	○	○	Groove A (E) : 2~15 Groove B (D) : 96~112 Groove C : 98~110	○	○	○	Groove A (E) : — Groove B (D), C : 97~109	×	○	○	Groove A (E) : 0~14 Groove B (D) : 97~109 Groove C : 98~108
	Rod side	○	○	○		○	○	○		○	○	○		○	○	○		○	○	○	
180	Head side	○	○	○	Groove A (E) : 2~16 Groove B (D) : 97~111 Groove C : 99~109	×	○	○	Groove A (E) : 0~12 Groove B (D) : 97~111 Groove C : 99~109	○	○	○	Groove A (E) : 2~15 Groove B (D) : 101~117 Groove C : 103~115	○	○	○	Groove A (E) : — Groove B (D), C : 102~114	×	○	○	Groove A (E) : 0~14 Groove B (D) : 102~114 Groove C : 103~113
	Rod side	○	○	○		○	○	○		○	○	○		○	○	○		○	○	○	
190	Head side	○	○	○	Groove A (E) : 2~16 Groove B (D) : 102~116 Groove C : 104~114	×	○	○	Groove A (E) : 0~12 Groove B (D) : 102~116 Groove C : 104~114	○	○	○	Groove A (E) : 2~15 Groove B (D) : 106~122 Groove C : 108~120	○	○	○	Groove A (E) : — Groove B (D), C : 107~119	×	○	○	Groove A (E) : 0~14 Groove B (D) : 107~119 Groove C : 108~118
	Rod side	○	○	○		○	○	○		○	○	○		○	○	○		○	○	○	
200	Head side	○	○	○	Groove A (E) : 2~16 Groove B (D) : 107~121 Groove C : 109~119	×	○	○	Groove A (E) : 0~12 Groove B (D) : 107~121 Groove C : 109~119	○	○	○	Groove A (E) : 2~15 Groove B (D) : 111~127 Groove C : 113~125	○	○	○	Groove A (E) : — Groove B (D), C : 112~124	×	○	○	Groove A (E) : 0~14 Groove B (D) : 112~124 Groove C : 113~123
	Rod side	○	○	○		○	○	○		○	○	○		○	○	○		○	○	○	

Note: The undetectable stroke range appears due to interference between the sensor switch and the body mounting bolts.

■ Moving sensor switch

- Loosening the mounting screw allows the sensor switch to be moved along the switch mounting groove of the cylinder body.
- Tighten the mounting screw with a tightening torque of 0.1~0.2N·m [0.9~1.8in·lb].

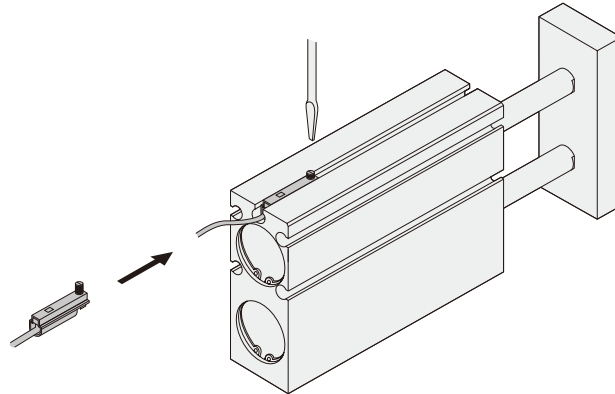

● Reed switch type

○ : Mountable △ : Either head side or rod side × : Unmountable — : Fully detectable within stroke (mm)


Bore size	Mounting groove	φ 10			Undetectable stroke range of sensor switch	φ 16			Undetectable stroke range of sensor switch	φ 20			Undetectable stroke range of sensor switch	φ 25			Undetectable stroke range of sensor switch	φ 32			Undetectable stroke range of sensor switch
		A	B	C		A	B	C		A	B	C		A	B	C		A	B	C	
Stroke		E	D	C		E	D	C		E	D	C		E	D	C		E	D	C	
10	Head side	×	○	○	Groove A (E) : 0~10 Groove B (D) : 5~10 Groove C : 6~10	×	×	△	Groove A (E) : 0~10 Groove B (D) : 8~10 Groove C : —	×	○	○	Groove A (E) : 0~10 Groove B (D) : 8~10 Groove C : 10	△	○	△	Groove A (E) : — Groove B (D), C : —	×	△	△	Groove A (E) : 0~10 Groove B (D) : 9~10 Groove C : —
	Rod side	×	×	×		×	×	△		×	×	×		△	×	△		×	△	△	
20	Head side	×	○	○	Groove A (E) : 0~18 Groove B (D) : 15~20 Groove C : 16~20	×	○	○	Groove A (E) : 0~14 Groove B (D) : 15~20 Groove C : 17~20	×	○	△	Groove A (E) : 0~17 Groove B (D) : 18~20 Groove C : —	○	○	△	Groove A (E) : — Groove B (D), C : —	×	○	△	Groove A (E) : 0~14 Groove B (D) : 19~20 Groove C : —
	Rod side	○	×	×		○	×	×		○	×	△		○	×	△		○	×	△	
30	Head side	×	○	○	Groove A (E) : 0~18 Groove B (D) : 19~30 Groove C : 20~30	×	○	○	Groove A (E) : 0~14 Groove B (D) : 20~30 Groove C : 22~30	×	○	○	Groove A (E) : 0~17 Groove B (D) : 24~30 Groove C : 26~30	○	○	○	Groove A (E) : — Groove B (D), C : 26~30	×	○	○	Groove A (E) : 0~14 Groove B (D) : 27~30 Groove C : 28~30
	Rod side	○	×	×		○	×	×		○	×	×		○	×	×		○	×	×	
40	Head side	×	○	○	Groove A (E) : 0~18 Groove B (D) : 25~40 Groove C : 26~40	×	○	○	Groove A (E) : 0~14 Groove B (D) : 25~40 Groove C : 27~40	×	○	○	Groove A (E) : 0~17 Groove B (D) : 29~40 Groove C : 31~40	○	○	○	Groove A (E) : — Groove B (D), C : 31~40	×	○	○	Groove A (E) : 0~14 Groove B (D) : 32~40 Groove C : 33~40
	Rod side	○	×	×		○	×	×		○	×	×		○	×	×		○	×	×	
50	Head side	×	○	○	Groove A (E) : 0~18 Groove B (D) : 30~47 Groove C : 31~46	×	○	○	Groove A (E) : 2~14 Groove B (D) : 30~49 Groove C : 32~47	×	○	○	Groove A (E) : 0~17 Groove B (D) : 34~50 Groove C : 36~50	○	○	○	Groove A (E) : — Groove B (D), C : 36~50	×	○	○	Groove A (E) : 0~14 Groove B (D) : 37~49 Groove C : 38~48
	Rod side	○	○	○		○	○	○		○	×	×		○	×	×		○	×	×	
60	Head side	×	○	○	Groove A (E) : 0~18 Groove B (D) : 35~52 Groove C : 36~51	×	○	○	Groove A (E) : 0~14 Groove B (D) : 35~54 Groove C : 37~52	×	○	○	Groove A (E) : 0~17 Groove B (D) : 39~59 Groove C : 41~57	○	○	○	Groove A (E) : — Groove B (D), C : 41~56	×	○	○	Groove A (E) : 0~14 Groove B (D) : 42~54 Groove C : 43~53
	Rod side	○	○	○		○	○	○		○	○	○		○	○	○		○	○	○	
70	Head side	×	○	○	Groove A (E) : 0~18 Groove B (D) : 40~57 Groove C : 41~56	×	○	○	Groove A (E) : 0~14 Groove B (D) : 40~59 Groove C : 42~57	×	○	○	Groove A (E) : 0~17 Groove B (D) : 44~64 Groove C : 46~62	○	○	○	Groove A (E) : — Groove B (D), C : 46~61	×	○	○	Groove A (E) : 0~14 Groove B (D) : 47~59 Groove C : 48~58
	Rod side	○	○	○		○	○	○		○	○	○		○	○	○		○	○	○	
80	Head side	×	○	○	Groove A (E) : 0~18 Groove B (D) : 45~62 Groove C : 46~61	×	○	○	Groove A (E) : 0~12 Groove B (D) : 45~64 Groove C : 47~62	×	○	○	Groove A (E) : 0~17 Groove B (D) : 49~69 Groove C : 51~62	○	○	○	Groove A (E) : — Groove B (D), C : 51~66	×	○	○	Groove A (E) : 0~14 Groove B (D) : 52~64 Groove C : 53~63
	Rod side	○	○	○		○	○	○		○	○	○		○	○	○		○	○	○	
90	Head side	×	○	○	Groove A (E) : 0~18 Groove B (D) : 50~67 Groove C : 51~66	×	○	○	Groove A (E) : 0~14 Groove B (D) : 50~69 Groove C : 52~67	×	○	○	Groove A (E) : 0~17 Groove B (D) : 54~74 Groove C : 56~72	○	○	○	Groove A (E) : — Groove B (D), C : 56~71	×	○	○	Groove A (E) : 0~14 Groove B (D) : 57~69 Groove C : 58~68
	Rod side	○	○	○		○	○	○		○	○	○		○	○	○		○	○	○	
100	Head side	×	○	○	Groove A (E) : 0~18 Groove B (D) : 55~72 Groove C : 56~71	×	○	○	Groove A (E) : 0~14 Groove B (D) : 55~74 Groove C : 57~72	×	○	○	Groove A (E) : 0~17 Groove B (D) : 59~79 Groove C : 61~77	○	○	○	Groove A (E) : — Groove B (D), C : 61~76	×	○	○	Groove A (E) : 0~14 Groove B (D) : 62~74 Groove C : 63~73
	Rod side	○	○	○		○	○	○		○	○	○		○	○	○		○	○	○	
110	Head side	×	○	○	Groove A (E) : 0~18 Groove B (D) : 60~77 Groove C : 61~76	×	○	○	Groove A (E) : 0~14 Groove B (D) : 60~79 Groove C : 62~77	×	○	○	Groove A (E) : 0~17 Groove B (D) : 64~84 Groove C : 66~82	○	○	○	Groove A (E) : — Groove B (D), C : 66~81	×	○	○	Groove A (E) : 0~14 Groove B (D) : 67~79 Groove C : 68~78
	Rod side	○	○	○		○	○	○		○	○	○		○	○	○		○	○	○	
120	Head side	×	○	○	Groove A (E) : 0~18 Groove B (D) : 65~82 Groove C : 66~81	×	○	○	Groove A (E) : 0~14 Groove B (D) : 65~84 Groove C : 67~82	×	○	○	Groove A (E) : 0~17 Groove B (D) : 69~89 Groove C : 71~87	○	○	○	Groove A (E) : — Groove B (D), C : 71~86	×	○	○	Groove A (E) : 0~14 Groove B (D) : 72~84 Groove C : 73~83
	Rod side	○	○	○		○	○	○		○	○	○		○	○	○		○	○	○	
130	Head side	×	○	○	Groove A (E) : 0~18 Groove B (D) : 70~87 Groove C : 71~86	×	○	○	Groove A (E) : 0~14 Groove B (D) : 70~89 Groove C : 72~87	×	○	○	Groove A (E) : 0~17 Groove B (D) : 74~94 Groove C : 76~92	○	○	○	Groove A (E) : — Groove B (D), C : 76~91	×	○	○	Groove A (E) : 0~14 Groove B (D) : 77~89 Groove C : 78~88
	Rod side	○	○	○		○	○	○		○	○	○		○	○	○		○	○	○	
140	Head side	×	○	○	Groove A (E) : 0~18 Groove B (D) : 75~92 Groove C : 76~91	×	○	○	Groove A (E) : 0~14 Groove B (D) : 75~94 Groove C : 77~92	×	○	○	Groove A (E) : 0~17 Groove B (D) : 79~99 Groove C : 81~97	○	○	○	Groove A (E) : — Groove B (D), C : 81~96	×	○	○	Groove A (E) : 0~14 Groove B (D) : 82~94 Groove C : 83~93
	Rod side	○	○	○		○	○	○		○	○	○		○	○	○		○	○	○	
150	Head side	×	○	○	Groove A (E) : 0~18 Groove B (D) : 80~99 Groove C : 82~97	×	○	○	Groove A (E) : 0~14 Groove B (D) : 80~99 Groove C : 82~97	×	○	○	Groove A (E) : 0~17 Groove B (D) : 84~104 Groove C : 86~102	○	○	○	Groove A (E) : — Groove B (D), C : 86~101	×	○	○	Groove A (E) : 0~14 Groove B (D) : 87~99 Groove C : 88~98
	Rod side	○	○	○		○	○	○		○	○	○		○	○	○		○	○	○	
160	Head side	×	○	○	Groove A (E) : 0~18 Groove B (D) : 85~104 Groove C : 87~102	×	○	○	Groove A (E) : 0~14 Groove B (D) : 85~104 Groove C : 87~102	×	○	○	Groove A (E) : 0~17 Groove B (D) : 89~109 Groove C : 91~107	○	○	○	Groove A (E) : — Groove B (D), C : 91~106	×	○	○	Groove A (E) : 0~14 Groove B (D) : 92~104 Groove C : 93~103
	Rod side	○	○	○		○	○	○		○	○	○		○	○	○		○	○	○	
170	Head side	×	○	○	Groove A (E) : 0~18 Groove B (D) : 90~109 Groove C : 92~107	×	○	○	Groove A (E) : 0~14 Groove B (D) : 90~109 Groove C : 92~107	×	○	○	Groove A (E) : 0~17 Groove B (D) : 94~114 Groove C : 96~112	○	○	○	Groove A (E) : — Groove B (D), C : 96~111	×	○	○	Groove A (E) : 0~14 Groove B (D) : 97~109 Groove C : 98~108
	Rod side	○	○	○		○	○	○		○	○	○		○	○	○		○	○	○	
180	Head side	×	○	○	Groove A (E) : 0~18 Groove B (D) : 95~114 Groove C : 97~112	×	○	○	Groove A (E) : 0~14 Groove B (D) : 95~114 Groove C : 97~112	×	○	○	Groove A (E) : 0~17 Groove B (D) : 99~119 Groove C : 101~117	○	○	○	Groove A (E) : — Groove B (D), C : 101~116	×	○	○	Groove A (E) : 0~14 Groove B (D) : 102~114 Groove C : 103~113
	Rod side	○	○	○		○	○	○		○	○	○		○	○	○		○	○	○	
190	Head side	×	○	○	Groove A (E) : 0~18 Groove B (D) : 100~119 Groove C : 102~117	×	○	○	Groove A (E) : 0~14 Groove B (D) : 100~119 Groove C : 102~117	×	○	○	Groove A (E) : 0~17 Groove B (D) : 104~124 Groove C : 106~122	○	○	○	Groove A (E) : — Groove B (D), C : 106~121	×	○	○	Groove A (E) : 0~14 Groove B (D) : 107~119 Groove C : 108~118
	Rod side	○	○	○		○	○	○		○	○	○		○	○	○		○	○	○	
200	Head side	×	○	○	Groove A (E) : 0~18 Groove B (D) : 105~124 Groove C : 107~122	×	○	○	Groove A (E) : 0~14 Groove B (D) : 105~124 Groove C : 107~122	×	○	○	Groove A (E) : 0~17 Groove B (D) : 109~129 Groove C : 111~127	○	○	○	Groove A (E) : — Groove B (D), C : 111~126	×	○	○	Groove A (E) : 0~14 Groove B (D) : 112~124 Groove C : 113~123
	Rod side	○	○	○		○	○	○		○	○	○		○	○	○		○	○	○	

Note: The undetectable stroke range appears due to interference between the sensor switch and the body mounting bolts.


Mountable or Unmountable Sensor Switch and Undetectable Stroke Range at End of Stroke

Double acting type (TBDA), single acting push type (TBSA)

■ In the case of using 3 rod side mounting holes on the body

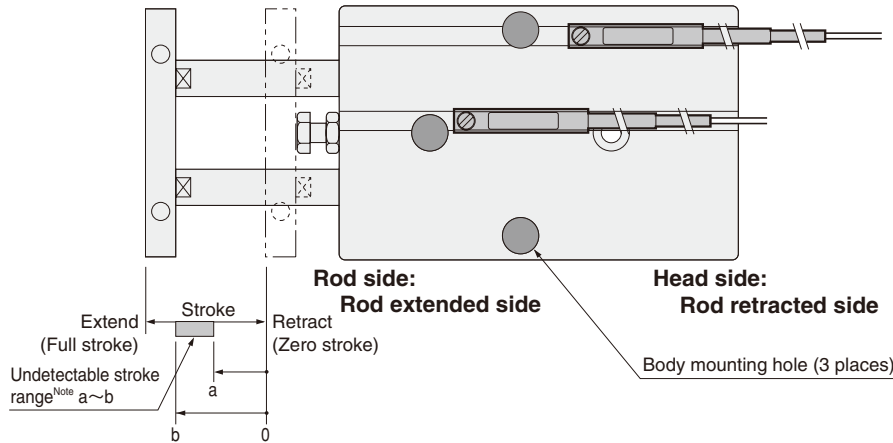

● Sensor switch mounting surface



Mounting a sensor switch in any of the grooves A~E allows detection at either the head side or rod side stroke end, and intermediate positions. The diagram shows the rod side with the square plate removed.

Note: The undetectable stroke range is the value measured from the zero stroke with 1 sensor switch installation.

● Solid state type

○ : Mountable △ : Either head side or rod side × : Unmountable — : Fully detectable within stroke


(mm)

Bore size	Mounting groove	A	B	C	Undetectable stroke range of sensor switch	A	B	C	Undetectable stroke range of sensor switch	A	B	C	Undetectable stroke range of sensor switch	A	B	C	Undetectable stroke range of sensor switch	A	B	C	Undetectable stroke range of sensor switch
Stroke		E	D			E	D			E	D			E	D			E	D		
10	Head side	○	○	○	Groove A (E) : — Groove B (D) : 7~10 Groove C : 8~10	○	△	△	Groove A (E) : — Groove B (D) : 8~10 Groove C : —	△	○	△	Groove A (E) : — Groove B (D) : 8~10 Groove C : —	○	△	△	Groove A (E) : — Groove B (D) : 9~10 Groove C : —	○	△	△	Groove A (E) : — Groove B (D) : 9~10 Groove C : —
	Rod side	○	×	×		○	△	△		△	×	×		○	△	△		○	△	△	
20	Head side	○	○	○	Groove A (E) : — Groove B (D) : 17~20 Groove C : 18~20	○	○	○	Groove A (E) : — Groove B (D) : 17~20 Groove C : 19~20	○	○	△	Groove A (E) : — Groove B (D) : 18~20 Groove C : —	○	△	△	Groove A (E) : — Groove B (D) : 19~20 Groove C : —	○	○	△	Groove A (E) : — Groove B (D) : 19~20 Groove C : —
	Rod side	○	×	×		○	×	×		○	×	×		○	×	×		○	×	×	
30	Head side	○	○	○	Groove A (E) : — Groove B (D) : 21~30 Groove C : 22~30	○	○	○	Groove A (E) : — Groove B (D) : 22~30 Groove C : 24~30	○	○	○	Groove A (E) : — Groove B (D) : 26~30 Groove C : 28~30	○	○	○	Groove A (E) : — Groove B (D) : 27~30 Groove C : 28~30	○	○	○	Groove A (E) : — Groove B (D) : 27~30 Groove C : 28~30
	Rod side	○	×	×		○	×	×		○	×	×		○	×	×		○	×	×	
40	Head side	○	○	○	Groove A (E) : — Groove B (D) : 27~40 Groove C : 28~40	○	○	○	Groove A (E) : — Groove B (D) : 27~40 Groove C : 29~40	○	○	○	Groove A (E) : — Groove B (D) : 31~40 Groove C : 33~40	○	○	○	Groove A (E) : — Groove B (D) : 32~40 Groove C : 33~40	○	○	○	Groove A (E) : — Groove B (D) : 32~40 Groove C : 33~40
	Rod side	○	×	×		○	×	×		○	×	×		○	×	×		○	×	×	
50	Head side	○	○	○	Groove A (E) : — Groove B (D) : 32~45 Groove C : 33~44	○	○	○	Groove A (E) : — Groove B (D) : 32~46 Groove C : 34~44	○	○	○	Groove A (E) : — Groove B (D) : 36~50 Groove C : 38~50	○	○	○	Groove A (E) : — Groove B (D) : 37~49 Groove C : 38~48	○	○	○	Groove A (E) : — Groove B (D) : 38~49 Groove C : 38~48
	Rod side	○	○	○		○	○	○		○	○	○		○	○	○		○	○	○	
60	Head side	○	○	○	Groove A (E) : — Groove B (D) : 37~50 Groove C : 38~49	○	○	○	Groove A (E) : — Groove B (D) : 37~51 Groove C : 39~49	○	○	○	Groove A (E) : — Groove B (D) : 41~57 Groove C : 43~55	○	○	○	Groove A (E) : — Groove B (D) : 42~54 Groove C : 43~53	○	○	○	Groove A (E) : — Groove B (D) : 42~54 Groove C : 43~53
	Rod side	○	○	○		○	○	○		○	○	○		○	○	○		○	○	○	
70	Head side	○	○	○	Groove A (E) : — Groove B (D) : 42~55 Groove C : 43~54	○	○	○	Groove A (E) : — Groove B (D) : 42~56 Groove C : 44~54	○	○	○	Groove A (E) : — Groove B (D) : 46~62 Groove C : 48~60	○	○	○	Groove A (E) : — Groove B (D) : 47~59 Groove C : 47~59	○	○	○	Groove A (E) : — Groove B (D) : 47~59 Groove C : 48~58
	Rod side	○	○	○		○	○	○		○	○	○		○	○	○		○	○	○	
80	Head side	○	○	○	Groove A (E) : — Groove B (D) : 47~60 Groove C : 48~59	○	○	○	Groove A (E) : — Groove B (D) : 47~61 Groove C : 49~59	○	○	○	Groove A (E) : — Groove B (D) : 51~67 Groove C : 53~65	○	○	○	Groove A (E) : — Groove B (D) : 52~64 Groove C : 53~63	○	○	○	Groove A (E) : — Groove B (D) : 52~64 Groove C : 53~63
	Rod side	○	○	○		○	○	○		○	○	○		○	○	○		○	○	○	
90	Head side	○	○	○	Groove A (E) : — Groove B (D) : 52~65 Groove C : 53~64	○	○	○	Groove A (E) : — Groove B (D) : 52~66 Groove C : 54~64	○	○	○	Groove A (E) : — Groove B (D) : 56~72 Groove C : 58~70	○	○	○	Groove A (E) : — Groove B (D) : 57~69 Groove C : 58~68	○	○	○	Groove A (E) : — Groove B (D) : 57~69 Groove C : 58~68
	Rod side	○	○	○		○	○	○		○	○	○		○	○	○		○	○	○	
100	Head side	○	○	○	Groove A (E) : — Groove B (D) : 57~70 Groove C : 58~69	○	○	○	Groove A (E) : — Groove B (D) : 57~71 Groove C : 59~69	○	○	○	Groove A (E) : — Groove B (D) : 61~77 Groove C : 63~75	○	○	○	Groove A (E) : — Groove B (D) : 62~74 Groove C : 63~73	○	○	○	Groove A (E) : — Groove B (D) : 62~74 Groove C : 63~73
	Rod side	○	○	○		○	○	○		○	○	○		○	○	○		○	○	○	
110	Head side	○	○	○	Groove A (E) : — Groove B (D) : 62~75 Groove C : 63~74	○	○	○	Groove A (E) : — Groove B (D) : 62~76 Groove C : 64~74	○	○	○	Groove A (E) : — Groove B (D) : 66~82 Groove C : 68~80	○	○	○	Groove A (E) : — Groove B (D) : 67~79 Groove C : 68~78	○	○	○	Groove A (E) : — Groove B (D) : 67~79 Groove C : 68~78
	Rod side	○	○	○		○	○	○		○	○	○		○	○	○		○	○	○	
120	Head side	○	○	○	Groove A (E) : — Groove B (D) : 67~80 Groove C : 68~79	○	○	○	Groove A (E) : — Groove B (D) : 67~81 Groove C : 69~79	○	○	○	Groove A (E) : — Groove B (D) : 71~87 Groove C : 73~85	○	○	○	Groove A (E) : — Groove B (D) : 72~84 Groove C : 72~84	○	○	○	Groove A (E) : — Groove B (D) : 72~84 Groove C : 73~83
	Rod side	○	○	○		○	○	○		○	○	○		○	○	○		○	○	○	
130	Head side	○	○	○	Groove A (E) : — Groove B (D) : 72~85 Groove C : 73~84	○	○	○	Groove A (E) : — Groove B (D) : 72~86 Groove C : 74~84	○	○	○	Groove A (E) : — Groove B (D) : 76~92 Groove C : 78~90	○	○	○	Groove A (E) : — Groove B (D) : 77~89 Groove C : 77~89	○	○	○	Groove A (E) : — Groove B (D) : 77~89 Groove C : 78~88
	Rod side	○	○	○		○	○	○		○	○	○		○	○	○		○	○	○	
140	Head side	○	○	○	Groove A (E) : — Groove B (D) : 77~90 Groove C : 78~89	○	○	○	Groove A (E) : — Groove B (D) : 77~91 Groove C : 79~89	○	○	○	Groove A (E) : — Groove B (D) : 81~97 Groove C : 83~95	○	○	○	Groove A (E) : — Groove B (D) : 82~94 Groove C : 83~93	○	○	○	Groove A (E) : — Groove B (D) : 82~94 Groove C : 83~93
	Rod side	○	○	○		○	○	○		○	○	○		○	○	○		○	○	○	
150	Head side	○	○	○	Groove A (E) : — Groove B (D) : 82~96 Groove C : 84~94	○	○	○	Groove A (E) : — Groove B (D) : 82~96 Groove C : 84~94	○	○	○	Groove A (E) : — Groove B (D) : 86~102 Groove C : 88~100	○	○	○	Groove A (E) : — Groove B (D) : 87~99 Groove C : 88~88	○	○	○	Groove A (E) : — Groove B (D) : 87~99 Groove C : 88~88
	Rod side	○	○	○		○	○	○		○	○	○		○	○	○		○	○	○	
160	Head side	○	○	○	Groove A (E) : — Groove B (D) : 87~101 Groove C : 89~99	○	○	○	Groove A (E) : — Groove B (D) : 87~101 Groove C : 89~99	○	○	○	Groove A (E) : — Groove B (D) : 91~107 Groove C : 93~105	○	○	○	Groove A (E) : — Groove B (D) : 92~104 Groove C : 93~103	○	○	○	Groove A (E) : — Groove B (D) : 92~104 Groove C : 93~103
	Rod side	○	○	○		○	○	○		○	○	○		○	○	○		○	○	○	
170	Head side	○	○	○	Groove A (E) : — Groove B (D) : 92~106 Groove C : 94~104	○	○	○	Groove A (E) : — Groove B (D) : 92~106 Groove C : 94~104	○	○	○	Groove A (E) : — Groove B (D) : 96~112 Groove C : 98~110	○	○	○	Groove A (E) : — Groove B (D) : 97~109 Groove C : 98~108	○	○	○	Groove A (E) : — Groove B (D) : 97~109 Groove C : 98~108
	Rod side	○	○	○		○	○	○		○	○	○		○	○	○		○	○	○	
180	Head side	○	○	○	Groove A (E) : — Groove B (D) : 97~111 Groove C : 99~109	○	○	○	Groove A (E) : — Groove B (D) : 97~111 Groove C : 99~109	○	○	○	Groove A (E) : — Groove B (D) : 101~117 Groove C : 103~115	○	○	○	Groove A (E) : — Groove B (D) : 102~114 Groove C : 103~113	○	○	○	Groove A (E) : — Groove B (D) : 102~114 Groove C : 103~113
	Rod side	○	○	○		○	○	○		○	○	○		○	○	○		○	○	○	
190	Head side	○	○	○	Groove A (E) : — Groove B (D) : 102~116 Groove C : 104~114	○	○	○	Groove A (E) : — Groove B (D) : 102~116 Groove C : 104~114	○	○	○	Groove A (E) : — Groove B (D) : 106~122 Groove C : 108~120	○	○	○	Groove A (E) : — Groove B (D) : 107~119 Groove C : 108~118	○	○	○	Groove A (E) : — Groove B (D) : 107~119 Groove C : 108~118
	Rod side	○	○	○		○	○	○		○	○	○		○	○	○		○	○	○	
200	Head side	○	○	○	Groove A (E) : — Groove B (D) : 107~121 Groove C : 109~119	○	○	○	Groove A (E) : — Groove B (D) : 107~121 Groove C : 109~119	○	○	○	Groove A (E) : — Groove B (D) : 111~125 Groove C : 113~127	○	○	○	Groove A (E) : — Groove B (D) : 112~124 Groove C : 113~123	○	○	○	Groove A (E) : — Groove B (D) : 112~124 Groove C : 113~123
	Rod side	○	○	○		○	○	○		○	○	○		○	○	○		○	○	○	

Note: The undetectable stroke range appears due to interference between the sensor switch and the body mounting bolts.

■ Moving sensor switch

- Loosening the mounting screw allows the sensor switch to be moved along the switch mounting groove of the cylinder body.
- Tighten the mounting screw with a tightening torque of 0.1~0.2N·m [0.9~1.8in·lbf].

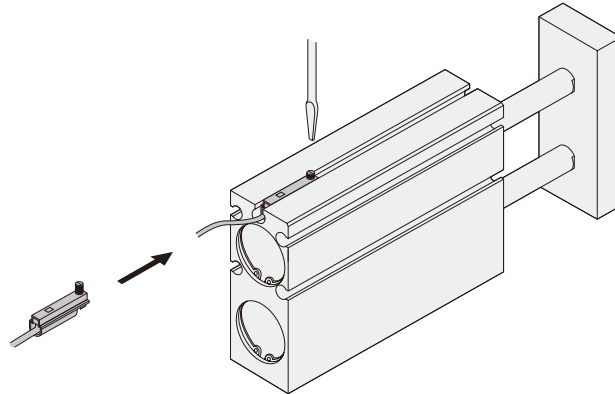

● Reed switch type

○ : Mountable △ : Either head side or rod side × : Unmountable — : Fully detectable within stroke

(mm)


Bore size	Mounting groove	φ 10			Undetectable stroke range of sensor switch	φ 16			Undetectable stroke range of sensor switch	φ 20			Undetectable stroke range of sensor switch	φ 25			Undetectable stroke range of sensor switch	φ 32			Undetectable stroke range of sensor switch
		A	B	C		A	B	C		A	B	C		A	B	C		A	B	C	
Stroke		E	D			E	D			E	D			E	D			E	D		
10	Head side	△	○	○	Groove A (E) : — Groove B (D) : 5~10 Groove C : 6~10	△	×	△	Groove A (E) : — Groove B (D) : 8~10 Groove C : —	△	×	×	Groove A (E) : — Groove B (D) : 8~10 Groove C : 10	△	×	△	Groove A (E) : — Groove B (D), C : —	△	△	△	Groove A (E) : — Groove B (D), C : 9~10 Groove C : —
	Rod side	△	×	×		△	×	△		△	×	×		△	×	△		△	△	△	
20	Head side	○	○	○	Groove A (E) : — Groove B (D) : 15~20 Groove C : 16~20	○	○	○	Groove A (E) : — Groove B (D) : 15~20 Groove C : 17~20	○	○	△	Groove A (E) : — Groove B (D) : 18~20 Groove C : —	○	○	△	Groove A (E) : — Groove B (D), C : —	○	○	△	Groove A (E) : — Groove B (D), C : 19~20 Groove C : —
	Rod side	○	×	×		○	×	×		○	×	×		○	×	×		○	×	×	
30	Head side	○	○	○	Groove A (E) : — Groove B (D) : 19~30 Groove C : 20~30	○	○	○	Groove A (E) : — Groove B (D) : 20~30 Groove C : 22~30	○	○	○	Groove A (E) : — Groove B (D) : 24~30 Groove C : 26~30	○	○	○	Groove A (E) : — Groove B (D), C : 26~30	○	○	○	Groove A (E) : — Groove B (D), C : 27~30 Groove C : 28~30
	Rod side	○	×	×		○	×	×		○	×	×		○	×	×		○	×	×	
40	Head side	○	○	○	Groove A (E) : — Groove B (D) : 25~40 Groove C : 26~40	○	○	○	Groove A (E) : — Groove B (D) : 25~40 Groove C : 27~40	○	○	○	Groove A (E) : — Groove B (D) : 29~40 Groove C : 31~40	○	○	○	Groove A (E) : — Groove B (D), C : 31~40	○	○	○	Groove A (E) : — Groove B (D), C : 32~40 Groove C : 33~40
	Rod side	○	×	×		○	×	×		○	×	×		○	×	×		○	×	×	
50	Head side	○	○	○	Groove A (E) : — Groove B (D) : 30~47 Groove C : 31~46	○	○	○	Groove A (E) : — Groove B (D) : 30~49 Groove C : 32~47	○	○	○	Groove A (E) : — Groove B (D) : 34~50 Groove C : 36~50	○	○	○	Groove A (E) : — Groove B (D), C : 36~50	○	○	○	Groove A (E) : — Groove B (D), C : 37~49 Groove C : 38~48
	Rod side	○	○	○		○	○	○		○	×	×		○	×	×		○	×	×	
60	Head side	○	○	○	Groove A (E) : — Groove B (D) : 35~52 Groove C : 36~51	○	○	○	Groove A (E) : — Groove B (D) : 35~54 Groove C : 37~52	○	○	○	Groove A (E) : — Groove B (D) : 39~59 Groove C : 41~57	○	○	○	Groove A (E) : — Groove B (D), C : 41~56	○	○	○	Groove A (E) : — Groove B (D) : 42~54 Groove C : 43~53
	Rod side	○	○	○		○	○	○		○	○	○		○	○	○		○	○	○	
70	Head side	○	○	○	Groove A (E) : — Groove B (D) : 40~57 Groove C : 41~56	○	○	○	Groove A (E) : — Groove B (D) : 40~59 Groove C : 42~57	○	○	○	Groove A (E) : — Groove B (D) : 44~64 Groove C : 46~62	○	○	○	Groove A (E) : — Groove B (D), C : 46~61	○	○	○	Groove A (E) : — Groove B (D), C : 47~59 Groove C : 48~58
	Rod side	○	○	○		○	○	○		○	○	○		○	○	○		○	○	○	
80	Head side	○	○	○	Groove A (E) : — Groove B (D) : 45~62 Groove C : 46~61	○	○	○	Groove A (E) : — Groove B (D) : 45~64 Groove C : 47~62	○	○	○	Groove A (E) : — Groove B (D) : 49~69 Groove C : 51~67	○	○	○	Groove A (E) : — Groove B (D), C : 51~66	○	○	○	Groove A (E) : — Groove B (D) : 52~64 Groove C : 53~63
	Rod side	○	○	○		○	○	○		○	○	○		○	○	○		○	○	○	
90	Head side	○	○	○	Groove A (E) : — Groove B (D) : 50~67 Groove C : 51~66	○	○	○	Groove A (E) : — Groove B (D) : 50~69 Groove C : 52~67	○	○	○	Groove A (E) : — Groove B (D) : 54~74 Groove C : 56~72	○	○	○	Groove A (E) : — Groove B (D), C : 56~71	○	○	○	Groove A (E) : — Groove B (D) : 57~69 Groove C : 58~68
	Rod side	○	○	○		○	○	○		○	○	○		○	○	○		○	○	○	
100	Head side	○	○	○	Groove A (E) : — Groove B (D) : 55~72 Groove C : 56~71	○	○	○	Groove A (E) : — Groove B (D) : 55~74 Groove C : 57~72	○	○	○	Groove A (E) : — Groove B (D) : 59~79 Groove C : 61~77	○	○	○	Groove A (E) : — Groove B (D), C : 61~76	○	○	○	Groove A (E) : — Groove B (D) : 62~74 Groove C : 63~73
	Rod side	○	○	○		○	○	○		○	○	○		○	○	○		○	○	○	
110	Head side	○	○	○	Groove A (E) : — Groove B (D) : 60~77 Groove C : 61~76	○	○	○	Groove A (E) : — Groove B (D) : 60~79 Groove C : 62~77	○	○	○	Groove A (E) : — Groove B (D) : 64~84 Groove C : 66~82	○	○	○	Groove A (E) : — Groove B (D), C : 66~81	○	○	○	Groove A (E) : — Groove B (D) : 67~79 Groove C : 68~78
	Rod side	○	○	○		○	○	○		○	○	○		○	○	○		○	○	○	
120	Head side	○	○	○	Groove A (E) : — Groove B (D) : 65~82 Groove C : 66~81	○	○	○	Groove A (E) : — Groove B (D) : 65~84 Groove C : 67~82	○	○	○	Groove A (E) : — Groove B (D) : 69~89 Groove C : 71~87	○	○	○	Groove A (E) : — Groove B (D), C : 71~86	○	○	○	Groove A (E) : — Groove B (D) : 72~84 Groove C : 73~83
	Rod side	○	○	○		○	○	○		○	○	○		○	○	○		○	○	○	
130	Head side	○	○	○	Groove A (E) : — Groove B (D) : 70~87 Groove C : 71~86	○	○	○	Groove A (E) : — Groove B (D) : 70~89 Groove C : 72~87	○	○	○	Groove A (E) : — Groove B (D) : 74~94 Groove C : 76~92	○	○	○	Groove A (E) : — Groove B (D), C : 76~91	○	○	○	Groove A (E) : — Groove B (D) : 77~89 Groove C : 78~88
	Rod side	○	○	○		○	○	○		○	○	○		○	○	○		○	○	○	
140	Head side	○	○	○	Groove A (E) : — Groove B (D) : 75~92 Groove C : 76~91	○	○	○	Groove A (E) : — Groove B (D) : 75~94 Groove C : 77~92	○	○	○	Groove A (E) : — Groove B (D) : 79~99 Groove C : 81~97	○	○	○	Groove A (E) : — Groove B (D), C : 81~96	○	○	○	Groove A (E) : — Groove B (D) : 82~94 Groove C : 83~93
	Rod side	○	○	○		○	○	○		○	○	○		○	○	○		○	○	○	
150	Head side	△	△	△		○	○	○	Groove A (E) : — Groove B (D) : 80~99 Groove C : 82~97	○	○	○	Groove A (E) : — Groove B (D) : 84~104 Groove C : 86~102	○	○	○	Groove A (E) : — Groove B (D), C : 86~101	○	○	○	Groove A (E) : — Groove B (D) : 87~99 Groove C : 88~98
	Rod side	△	△	△		○	○	○		○	○	○		○	○	○		○	○	○	
160	Head side	△	△	△		○	○	○	Groove A (E) : — Groove B (D) : 85~104 Groove C : 87~102	○	○	○	Groove A (E) : — Groove B (D) : 89~109 Groove C : 91~107	○	○	○	Groove A (E) : — Groove B (D), C : 91~106	○	○	○	Groove A (E) : — Groove B (D) : 92~104 Groove C : 93~103
	Rod side	△	△	△		○	○	○		○	○	○		○	○	○		○	○	○	
170	Head side	△	△	△		○	○	○	Groove A (E) : — Groove B (D) : 90~109 Groove C : 92~107	○	○	○	Groove A (E) : — Groove B (D) : 94~114 Groove C : 96~112	○	○	○	Groove A (E) : — Groove B (D), C : 96~111	○	○	○	Groove A (E) : — Groove B (D) : 97~109 Groove C : 98~108
	Rod side	△	△	△		○	○	○		○	○	○		○	○	○		○	○	○	
180	Head side	△	△	△		○	○	○	Groove A (E) : — Groove B (D) : 95~114 Groove C : 97~112	○	○	○	Groove A (E) : — Groove B (D) : 99~119 Groove C : 101~117	○	○	○	Groove A (E) : — Groove B (D), C : 101~116	○	○	○	Groove A (E) : — Groove B (D) : 102~114 Groove C : 103~113
	Rod side	△	△	△		○	○	○		○	○	○		○	○	○		○	○	○	
190	Head side	△	△	△		○	○	○	Groove A (E) : — Groove B (D) : 100~119 Groove C : 102~117	○	○	○	Groove A (E) : — Groove B (D) : 104~124 Groove C : 106~122	○	○	○	Groove A (E) : — Groove B (D), C : 106~121	○	○	○	Groove A (E) : — Groove B (D) : 107~119 Groove C : 108~118
	Rod side	△	△	△		○	○	○		○	○	○		○	○	○		○	○	○	
200	Head side	△	△	△		○	○	○	Groove A (E) : — Groove B (D) : 105~124 Groove C : 107~122	○	○	○	Groove A (E) : — Groove B (D) : 109~129 Groove C : 111~127	○	○	○	Groove A (E) : — Groove B (D), C : 111~126	○	○	○	Groove A (E) : — Groove B (D) : 112~124 Groove C : 113~123
	Rod side	△	△	△		○	○	○		○	○	○		○	○	○		○	○	○	

Note: The undetectable stroke range appears due to interference between the sensor switch and the body mounting bolts.

Mountable or Unmountable Sensor Switch and Undetectable Stroke Range at End of Stroke


Double acting long bushing type (TBDAM)

In the case of using 4 mounting holes on the body

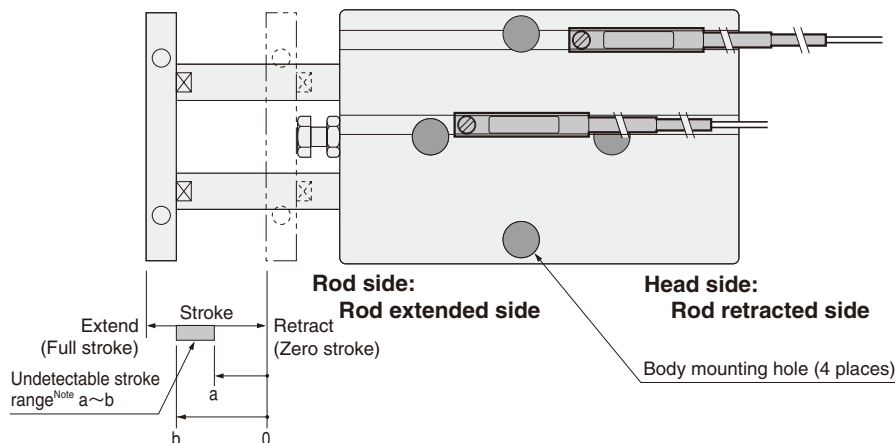

Note: The undetectable stroke range is the value measured from the zero stroke with 1 sensor switch installation.

● Sensor switch mounting surface



Mounting a sensor switch in any of the grooves A~E allows detection at either the head side or rod side stroke end, and intermediate positions. The diagram shows the rod side with the square plate removed.

Caution

When mounting a sensor switch in the A or E groove's rod extended side (the rod side of the body), ensure that the sensor switch is installed inside the groove between body mounting holes before tightening body mounting bolts, to avoid interference between the sensor switch and the bolts.

This procedure is not necessary for $\phi 25$ [0.984in.] and $\phi 32$ [1.260in.], however, where no interference occurs.

● Solid state type


○ : Mountable △ : Either head side or rod side × : Unmountable — : Fully detectable within stroke (mm)

Bore size	Mounting groove	$\phi 10$			$\phi 16$			$\phi 20$			$\phi 25$			$\phi 32$		
Stroke		A	B	C	A	B	C	A	B	C	A	B	C	A	B	C
10	Head side	×	△	○	Groove A (E) : 0~10 Groove B (D) : 7~10 Groove C : 8~10	×	△	○	Groove A (E) : 0~10 Groove B (D) : — Groove C : —	×	△	○	Groove A (E) : 0~10 Groove B (D) : 8~10 Groove C : —	×	△	○
	Rod side	×	△	○	Groove A (E) : 0~11 Groove B (D) : 17~20 Groove C : 18~20	×	△	○	Groove A (E) : 0~12 Groove B (D) : 17~20 Groove C : 19~20	×	△	○	Groove A (E) : 0~14 Groove B (D) : 19~20 Groove C : —	×	△	○
20	Head side	×	△	○	Groove A (E) : 0~11 Groove B (D) : 21~30 Groove C : 22~30	×	△	○	Groove A (E) : 0~12 Groove B (D) : 22~30 Groove C : 24~30	×	△	○	Groove A (E) : 0~14 Groove B (D) : 22~30 Groove C : 28~30	×	△	○
	Rod side	×	△	○	Groove A (E) : 0~11 Groove B (D) : 32~45 Groove C : 33~44	×	△	○	Groove A (E) : 0~12 Groove B (D) : 32~46 Groove C : 34~44	×	△	○	Groove A (E) : 0~14 Groove B (D) : 32~49 Groove C : 38~48	×	△	○
30	Head side	×	△	○	Groove A (E) : 0~11 Groove B (D) : 42~55 Groove C : 43~54	×	△	○	Groove A (E) : 0~12 Groove B (D) : 42~56 Groove C : 44~54	×	△	○	Groove A (E) : 0~14 Groove B (D) : 42~59 Groove C : 43~53	×	△	○
	Rod side	×	△	○	Groove A (E) : 0~11 Groove B (D) : 57~70 Groove C : 58~69	×	△	○	Groove A (E) : 0~12 Groove B (D) : 57~71 Groove C : 59~69	×	△	○	Groove A (E) : 0~14 Groove B (D) : 57~79 Groove C : 63~73	×	△	○
40	Head side	×	△	○	Groove A (E) : 0~11 Groove B (D) : 62~75 Groove C : 63~74	×	△	○	Groove A (E) : 0~12 Groove B (D) : 62~76 Groove C : 64~74	×	△	○	Groove A (E) : 0~14 Groove B (D) : 62~84 Groove C : 68~78	×	△	○
	Rod side	×	△	○	Groove A (E) : 0~11 Groove B (D) : 67~80 Groove C : 68~79	×	△	○	Groove A (E) : 0~12 Groove B (D) : 67~81 Groove C : 69~79	×	△	○	Groove A (E) : 0~14 Groove B (D) : 67~89 Groove C : 73~83	×	△	○
50	Head side	×	△	○	Groove A (E) : 0~11 Groove B (D) : 72~85 Groove C : 73~84	×	△	○	Groove A (E) : 0~12 Groove B (D) : 72~86 Groove C : 74~84	×	△	○	Groove A (E) : 0~14 Groove B (D) : 72~94 Groove C : 83~93	×	△	○
	Rod side	×	△	○	Groove A (E) : 0~11 Groove B (D) : 77~90 Groove C : 78~89	×	△	○	Groove A (E) : 0~12 Groove B (D) : 77~91 Groove C : 79~89	×	△	○	Groove A (E) : 0~14 Groove B (D) : 77~99 Groove C : 88~98	×	△	○
60	Head side	×	△	○	Groove A (E) : 0~11 Groove B (D) : 82~96 Groove C : 84~94	×	△	○	Groove A (E) : 0~12 Groove B (D) : 82~96 Groove C : 84~94	×	△	○	Groove A (E) : 0~14 Groove B (D) : 82~104 Groove C : 93~103	×	△	○
	Rod side	×	△	○	Groove A (E) : 0~11 Groove B (D) : 87~101 Groove C : 89~99	×	△	○	Groove A (E) : 0~12 Groove B (D) : 87~101 Groove C : 89~99	×	△	○	Groove A (E) : 0~14 Groove B (D) : 87~109 Groove C : 98~108	×	△	○
70	Head side	×	△	○	Groove A (E) : 0~11 Groove B (D) : 92~106 Groove C : 94~104	×	△	○	Groove A (E) : 0~12 Groove B (D) : 92~106 Groove C : 94~104	×	△	○	Groove A (E) : 0~14 Groove B (D) : 92~114 Groove C : 102~114	×	△	○
	Rod side	×	△	○	Groove A (E) : 0~11 Groove B (D) : 97~111 Groove C : 99~109	×	△	○	Groove A (E) : 0~12 Groove B (D) : 97~111 Groove C : 99~109	×	△	○	Groove A (E) : 0~14 Groove B (D) : 97~119 Groove C : 103~113	×	△	○
80	Head side	×	△	○	Groove A (E) : 0~11 Groove B (D) : 102~116 Groove C : 104~114	×	△	○	Groove A (E) : 0~12 Groove B (D) : 102~116 Groove C : 104~114	×	△	○	Groove A (E) : 0~14 Groove B (D) : 102~124 Groove C : 112~124	×	△	○
	Rod side	×	△	○	Groove A (E) : 0~11 Groove B (D) : 107~121 Groove C : 109~119	×	△	○	Groove A (E) : 0~12 Groove B (D) : 107~121 Groove C : 109~119	×	△	○	Groove A (E) : 0~14 Groove B (D) : 107~129 Groove C : 117~129	×	△	○
90	Head side	×	△	○	Groove A (E) : 0~11 Groove B (D) : 107~121 Groove C : 109~119	×	△	○	Groove A (E) : 0~12 Groove B (D) : 107~121 Groove C : 109~119	×	△	○	Groove A (E) : 0~14 Groove B (D) : 107~132 Groove C : 118~130	×	△	○
	Rod side	×	△	○	Groove A (E) : 0~11 Groove B (D) : 112~126 Groove C : 114~124	×	△	○	Groove A (E) : 0~12 Groove B (D) : 112~126 Groove C : 114~124	×	△	○	Groove A (E) : 0~14 Groove B (D) : 112~140 Groove C : 122~132	×	△	○
100	Head side	×	△	○	Groove A (E) : 0~11 Groove B (D) : 117~131 Groove C : 119~129	×	△	○	Groove A (E) : 0~12 Groove B (D) : 117~131 Groove C : 119~129	×	△	○	Groove A (E) : 0~14 Groove B (D) : 117~144 Groove C : 127~137	×	△	○
	Rod side	×	△	○	Groove A (E) : 0~11 Groove B (D) : 122~136 Groove C : 124~134	×	△	○	Groove A (E) : 0~12 Groove B (D) : 122~136 Groove C : 124~134	×	△	○	Groove A (E) : 0~14 Groove B (D) : 122~150 Groove C : 135~145	×	△	○
110	Head side	×	△	○	Groove A (E) : 0~11 Groove B (D) : 127~141 Groove C : 129~139	×	△	○	Groove A (E) : 0~12 Groove B (D) : 127~141 Groove C : 129~139	×	△	○	Groove A (E) : 0~14 Groove B (D) : 127~154 Groove C : 140~150	×	△	○
	Rod side	×	△	○	Groove A (E) : 0~11 Groove B (D) : 132~146 Groove C : 134~144	×	△	○	Groove A (E) : 0~12 Groove B (D) : 132~146 Groove C : 134~144	×	△	○	Groove A (E) : 0~14 Groove B (D) : 132~160 Groove C : 145~155	×	△	○
120	Head side	×	△	○	Groove A (E) : 0~11 Groove B (D) : 137~151 Groove C : 139~149	×	△	○	Groove A (E) : 0~12 Groove B (D) : 137~151 Groove C : 139~149	×	△	○	Groove A (E) : 0~14 Groove B (D) : 137~158 Groove C : 150~160	×	△	○
	Rod side	×	△	○	Groove A (E) : 0~11 Groove B (D) : 142~156 Groove C : 144~154	×	△	○	Groove A (E) : 0~12 Groove B (D) : 142~156 Groove C : 144~154	×	△	○	Groove A (E) : 0~14 Groove B (D) : 142~164 Groove C : 155~165	×	△	○
130	Head side	×	△	○	Groove A (E) : 0~11 Groove B (D) : 147~161 Groove C : 149~159	×	△	○	Groove A (E) : 0~12 Groove B (D) : 147~161 Groove C : 149~159	×	△	○	Groove A (E) : 0~14 Groove B (D) : 147~166 Groove C : 160~170	×	△	○
	Rod side	×	△	○	Groove A (E) : 0~11 Groove B (D) : 152~166 Groove C : 154~164	×	△	○	Groove A (E) : 0~12 Groove B (D) : 152~166 Groove C : 154~164	×	△	○	Groove A (E) : 0~14 Groove B (D) : 152~170 Groove C : 165~175	×	△	○
140	Head side	×	△	○	Groove A (E) : 0~11 Groove B (D) : 157~171 Groove C : 159~169	×	△	○	Groove A (E) : 0~12 Groove B (D) : 157~171 Groove C : 159~169	×	△	○	Groove A (E) : 0~14 Groove B (D) : 157~174 Groove C : 170~180	×	△	○
	Rod side	×	△	○	Groove A (E) : 0~11 Groove B (D) : 162~176 Groove C : 164~174	×	△	○	Groove A (E) : 0~12 Groove B (D) : 162~176 Groove C : 164~174	×	△	○	Groove A (E) : 0~14 Groove B (D) : 162~178 Groove C : 175~185	×	△	○
150	Head side	×	△	○	Groove A (E) : 0~11 Groove B (D) : 167~181 Groove C : 169~179	×	△	○	Groove A (E) : 0~12 Groove B (D) : 167~181 Groove C : 169~179	×	△	○	Groove A (E) : 0~14 Groove B (D) : 167~180 Groove C : 180~190	×	△	○
	Rod side	×	△	○	Groove A (E) : 0~11 Groove B (D) : 172~186 Groove C : 174~184	×	△	○	Groove A (E) : 0~12 Groove B (D) : 172~186 Groove C : 174~184	×	△	○	Groove A (E) : 0~14 Groove B (D) : 172~184 Groove C : 185~195	×	△	○
160	Head side	×	△	○	Groove A (E) : 0~11 Groove B (D) : 177~191 Groove C : 179~189	×	△	○	Groove A (E) : 0~12 Groove B (D) : 177~191 Groove C : 179~189	×	△	○	Groove A (E) : 0~14 Groove B (D) : 177~186 Groove C : 190~200	×	△	○
	Rod side	×	△	○	Groove A (E) : 0~11 Groove B (D) : 182~196 Groove C : 184~194	×	△	○	Groove A (E) : 0~12 Groove B (D) : 182~196 Groove C : 184~194	×	△	○	Groove A (E) : 0~14 Groove B (D) : 182~190 Groove C : 195~205	×	△	○
170	Head side	×	△	○	Groove A (E) : 0~11 Groove B (D) : 187~201 Groove C : 189~199	×	△	○	Groove A (E) : 0~12 Groove B (D) : 187~201 Groove C : 189~199	×	△	○	Groove A (E) : 0~14 Groove B (D) : 187~194 Groove C : 200~210	×	△	○
	Rod side	×	△	○	Groove A (E) : 0~11 Groove B (D) : 192~206 Groove C : 194~204	×	△	○	Groove A (E) : 0~12 Groove B (D) : 192~206 Groove C : 194~204	×	△	○	Groove A (E) : 0~14 Groove B (D) : 192~198 Groove C : 205~215	×	△	○
180	Head side	×	△	○	Groove A (E) : 0~11 Groove B (D) : 197~211 Groove C : 199~209	×	△	○	Groove A (E) : 0~12 Groove B (D) : 197~211 Groove C : 199~209	×	△	○	Groove A (E) : 0~14 Groove B (D) : 197~204 Groove C : 210~220	×	△	○
	Rod side	×	△	○	Groove A (E) : 0~11 Groove B (D) : 202~216 Groove C : 204~214	×	△	○	Groove A (E) : 0~12 Groove B (D) : 202~216 Groove C : 204~214	×	△	○	Groove A (E) : 0~14 Groove B (D) : 202~208 Groove C : 215~225	×	△	○
190	Head side	×	△	○	Groove A (E) : 0~11 Groove B (D) : 207~221 Groove C : 209~219	×	△	○	Groove A (E) : 0~12 Groove B (D) : 207~221 Groove C : 209~219	×	△	○	Groove A (E) : 0~14 Groove B (D) : 207~214 Groove C : 220~230	×	△	○
	Rod side	×	△	○	Groove A (E) : 0~11 Groove B (D) : 212~226 Groove C : 214~224	×	△	○	Groove A (E) : 0~12 Groove B (D) : 212~226 Groove C : 214~224	×	△	○	Groove A (E) : 0~14 Groove B (D) : 212~218 Groove C : 225~235	×	△	○
200	Head side	×	△	○	Groove A (E) : 0~11 Groove B (D) : 217~231 Groove C : 219~229	×	△	○	Groove A (E) : 0~12 Groove B (D) : 217~231 Groove C : 219~229	×	△	○	Groove A (E) : 0~14 Groove B (D) : 217~224 Groove C : 230~240	×	△	○
	Rod side	×	△	○	Groove A (E) : 0~11 Groove B (D) : 222~236 Groove C : 224~234	×	△	○	Groove A (E) : 0~12 Groove B (D) : 222~236 Groove C : 224~234	×	△	○	Groove A (E) : 0~14 Groove B (D) : 222~228 Groove C : 235~245	×	△	○

Note: The undetectable stroke range appears due to interference between the sensor switch and the body mounting bolts.

■ Moving sensor switch

- Loosening the mounting screw allows the sensor switch to be moved along the switch mounting groove of the cylinder body.
- Tighten the mounting screw with a tightening torque of 0.1~0.2N·m [0.9~1.8in·lbf].

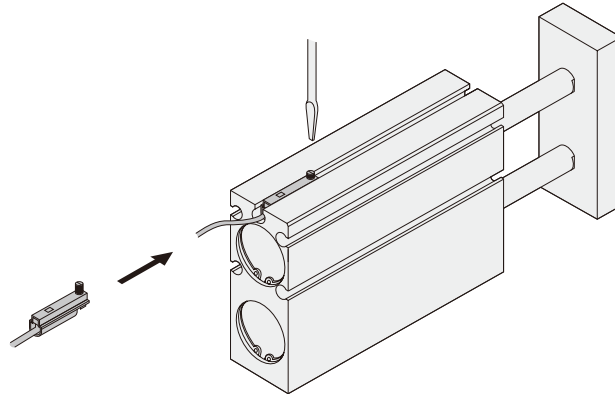

● Reed switch type

○ : Mountable △ : Either head side or rod side × : Unmountable — : Fully detectable within stroke (mm)

Bore size	Mounting groove	φ 10			φ 16			φ 20			φ 25			φ 32			
		A	B	C	A	B	C	A	B	C	A	B	C	A	B	C	
		E	D		E	D		E	D		E	D		E	D		
Stroke				Undetectable stroke range of sensor switch				Undetectable stroke range of sensor switch				Undetectable stroke range of sensor switch				Undetectable stroke range of sensor switch	
10	Head side	×	△	△	Groove A (E) : 0~10 Groove B (D) : 5~10 Groove C : 6~10	×	×	△	Groove A (E) : 0~10 Groove B (D) : 8~10 Groove C : —	×	○	○	Groove A (E) : 0~10 Groove B (D) : 8~10 Groove C : 10	△	△	△	Groove A (E) : 0~10 Groove B (D) : — Groove C : —
	Rod side	×	△	△		×	×	△		×	×	×		△	△	△	
20	Head side	×	○	○	Groove A (E) : 0~13 Groove B (D) : 15~20 Groove C : 16~20	×	○	○	Groove A (E) : 0~14 Groove B (D) : 15~20 Groove C : 17~20	×	×	△	Groove A (E) : 0~17 Groove B (D) : 18~20 Groove C : —	○	△	△	Groove A (E) : 0~14 Groove B (D) : — Groove C : —
	Rod side	○	×	×		○	×	×		○	×	△		○	△	△	
30	Head side	×	○	○	Groove A (E) : 0~13 Groove B (D) : 19~30 Groove C : 20~30	×	○	○	Groove A (E) : 0~14 Groove B (D) : 20~30 Groove C : 22~30	×	○	△	Groove A (E) : 0~17 Groove B (D) : 28~30 Groove C : —	○	○	○	Groove A (E) : 0~14 Groove B (D) : 27~30 Groove C : 28~30
	Rod side	○	×	×		○	×	×		○	×	△		○	○	○	
40	Head side	×	○	○	Groove A (E) : 0~13 Groove B (D) : 25~40 Groove C : 26~40	×	○	○	Groove A (E) : 0~14 Groove B (D) : 25~40 Groove C : 27~40	×	○	○	Groove A (E) : 0~17 Groove B (D) : 34~40 Groove C : 36~40	○	○	○	Groove A (E) : 0~14 Groove B (D) : 32~40 Groove C : 33~40
	Rod side	○	×	×		○	×	×		○	×	×		○	×	×	
50	Head side	×	○	○	Groove A (E) : 0~13 Groove B (D) : 30~47 Groove C : 31~46	×	○	○	Groove A (E) : 0~14 Groove B (D) : 30~49 Groove C : 32~47	×	○	○	Groove A (E) : 0~17 Groove B (D) : 39~50 Groove C : 41~50	○	○	○	Groove A (E) : 0~14 Groove B (D) : 37~49 Groove C : 38~48
	Rod side	○	○	○		○	○	○		○	×	×		○	×	×	
60	Head side	×	○	○	Groove A (E) : 0~13 Groove B (D) : 35~52 Groove C : 36~51	×	○	○	Groove A (E) : 0~14 Groove B (D) : 35~54 Groove C : 37~52	×	○	○	Groove A (E) : 0~17 Groove B (D) : 44~60 Groove C : 46~60	○	○	○	Groove A (E) : 0~14 Groove B (D) : 42~54 Groove C : 43~53
	Rod side	○	○	○		○	○	○		○	×	×		○	×	×	
70	Head side	×	○	○	Groove A (E) : 0~13 Groove B (D) : 40~57 Groove C : 41~56	×	○	○	Groove A (E) : 0~14 Groove B (D) : 40~59 Groove C : 42~57	×	○	○	Groove A (E) : 0~17 Groove B (D) : 49~69 Groove C : 51~67	○	○	○	Groove A (E) : 0~14 Groove B (D) : 47~59 Groove C : 48~58
	Rod side	○	○	○		○	○	○		○	○	○		○	○	○	
80	Head side	×	○	○	Groove A (E) : 0~13 Groove B (D) : 45~62 Groove C : 46~61	×	○	○	Groove A (E) : 0~14 Groove B (D) : 45~64 Groove C : 47~62	×	○	○	Groove A (E) : 0~17 Groove B (D) : 54~74 Groove C : 56~72	○	○	○	Groove A (E) : 0~14 Groove B (D) : 52~64 Groove C : 53~63
	Rod side	○	○	○		○	○	○		○	○	○		○	○	○	
90	Head side	×	○	○	Groove A (E) : 0~13 Groove B (D) : 50~67 Groove C : 51~66	×	○	○	Groove A (E) : 0~14 Groove B (D) : 50~69 Groove C : 52~67	×	○	○	Groove A (E) : 0~17 Groove B (D) : 59~79 Groove C : 61~77	○	○	○	Groove A (E) : 0~14 Groove B (D) : 57~69 Groove C : 58~68
	Rod side	○	○	○		○	○	○		○	○	○		○	○	○	
100	Head side	×	○	○	Groove A (E) : 0~13 Groove B (D) : 55~72 Groove C : 56~71	×	○	○	Groove A (E) : 0~14 Groove B (D) : 55~74 Groove C : 57~72	×	○	○	Groove A (E) : 0~17 Groove B (D) : 64~84 Groove C : 66~82	○	○	○	Groove A (E) : 0~14 Groove B (D) : 62~74 Groove C : 63~73
	Rod side	○	○	○		○	○	○		○	○	○		○	○	○	
110	Head side	×	○	○	Groove A (E) : 0~13 Groove B (D) : 60~77 Groove C : 61~76	×	○	○	Groove A (E) : 0~14 Groove B (D) : 60~79 Groove C : 62~77	×	○	○	Groove A (E) : 0~17 Groove B (D) : 68~89 Groove C : 71~87	○	○	○	Groove A (E) : 0~14 Groove B (D) : 67~79 Groove C : 68~78
	Rod side	○	○	○		○	○	○		○	○	○		○	○	○	
120	Head side	×	○	○	Groove A (E) : 0~13 Groove B (D) : 65~82 Groove C : 66~81	×	○	○	Groove A (E) : 0~14 Groove B (D) : 65~84 Groove C : 67~82	×	○	○	Groove A (E) : 0~17 Groove B (D) : 74~94 Groove C : 76~92	○	○	○	Groove A (E) : 0~14 Groove B (D) : 72~84 Groove C : 73~83
	Rod side	○	○	○		○	○	○		○	○	○		○	○	○	
130	Head side	×	○	○	Groove A (E) : 0~13 Groove B (D) : 70~87 Groove C : 71~86	×	○	○	Groove A (E) : 0~14 Groove B (D) : 70~89 Groove C : 72~87	×	○	○	Groove A (E) : 0~17 Groove B (D) : 79~99 Groove C : 81~97	○	○	○	Groove A (E) : 0~14 Groove B (D) : 77~89 Groove C : 78~88
	Rod side	○	○	○		○	○	○		○	○	○		○	○	○	
140	Head side	×	○	○	Groove A (E) : 0~13 Groove B (D) : 75~92 Groove C : 76~91	×	○	○	Groove A (E) : 0~14 Groove B (D) : 75~94 Groove C : 77~92	×	○	○	Groove A (E) : 0~17 Groove B (D) : 84~104 Groove C : 86~102	○	○	○	Groove A (E) : 0~14 Groove B (D) : 82~94 Groove C : 83~93
	Rod side	○	○	○		○	○	○		○	○	○		○	○	○	
150	Head side					×	○	○	Groove A (E) : 0~14 Groove B (D) : 80~99 Groove C : 82~97	×	○	○	Groove A (E) : 0~17 Groove B (D) : 89~109 Groove C : 91~107	○	○	○	Groove A (E) : 0~14 Groove B (D) : 87~99 Groove C : 88~98
	Rod side					○	○	○		○	○	○		○	○	○	
160	Head side					×	○	○	Groove A (E) : 0~14 Groove B (D) : 85~104 Groove C : 87~102	×	○	○	Groove A (E) : 0~17 Groove B (D) : 94~114 Groove C : 96~112	○	○	○	Groove A (E) : 0~14 Groove B (D) : 92~104 Groove C : 93~103
	Rod side					○	○	○		○	○	○		○	○	○	
170	Head side					×	○	○	Groove A (E) : 0~14 Groove B (D) : 90~109 Groove C : 92~107	×	○	○	Groove A (E) : 0~17 Groove B (D) : 99~119 Groove C : 101~117	○	○	○	Groove A (E) : 0~14 Groove B (D) : 97~109 Groove C : 98~108
	Rod side					○	○	○		○	○	○		○	○	○	
180	Head side					×	○	○	Groove A (E) : 0~14 Groove B (D) : 95~114 Groove C : 97~112	×	○	○	Groove A (E) : 0~17 Groove B (D) : 104~124 Groove C : 106~122	○	○	○	Groove A (E) : 0~14 Groove B (D) : 102~114 Groove C : 103~113
	Rod side					○	○	○		○	○	○		○	○	○	
190	Head side					×	○	○	Groove A (E) : 0~14 Groove B (D) : 100~119 Groove C : 102~117	×	○	○	Groove A (E) : 0~17 Groove B (D) : 109~129 Groove C : 111~127	○	○	○	Groove A (E) : 0~14 Groove B (D) : 107~119 Groove C : 108~118
	Rod side					○	○	○		○	○	○		○	○	○	
200	Head side					×	○	○	Groove A (E) : 0~14 Groove B (D) : 105~124 Groove C : 107~122	×	○	○	Groove A (E) : 0~17 Groove B (D) : 114~134 Groove C : 116~132	○	○	○	Groove A (E) : 0~14 Groove B (D) : 112~124 Groove C : 113~123
	Rod side					○	○	○		○	○	○		○	○	○	



Note: The undetectable stroke range appears due to interference between the sensor switch and the body mounting bolts.

Mountable or Unmountable Sensor Switch and Undetectable Stroke Range at End of Stroke

Double acting long bushing type (TBDAM)

■ In the case of using 2 center mounting holes on the body

● Sensor switch mounting surface

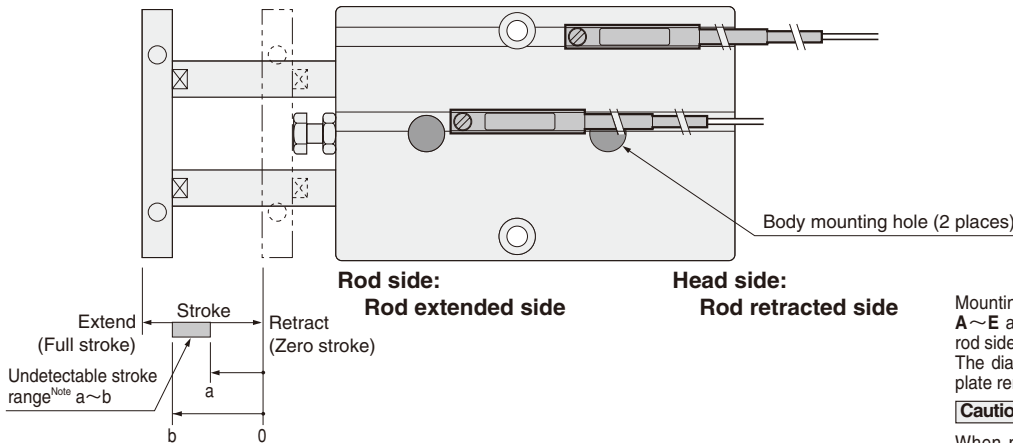

Mounting a sensor switch in any of the grooves A~E allows detection at either the head side or rod side stroke end, and intermediate positions. The diagram shows the rod side with the square plate removed.

Caution

When mounting a sensor switch in the A or E groove's rod extended side (the rod side of the body), ensure that the sensor switch is installed inside the groove between body mounting holes before tightening body mounting bolts, to avoid interference between the sensor switch and the bolts.

This procedure is not necessary for $\phi 25$ [0.984in.] and $\phi 32$ [1.260in.], however, where no interference occurs.

Note: The undetectable stroke range is the value measured from the zero stroke with 1 sensor switch installation.


● Solid state type

○ : Mountable △ : Either head side or rod side × : Unmountable — : Fully detectable within stroke (mm)

Bore size	Mounting groove	$\phi 10$			$\phi 16$			$\phi 20$			$\phi 25$			$\phi 32$		
Stroke		A	B	C	A	B	C	A	B	C	A	B	C	A	B	C
10	Head side	×	△	○	×	○	○	×	○	○	×	○	○	×	○	○
	Rod side	×	△	○	×	○	○	×	○	○	×	○	○	×	○	○
20	Head side	×	○	○	×	○	○	×	○	○	×	○	○	×	○	○
	Rod side	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○
30	Head side	×	○	○	×	○	○	×	○	○	×	○	○	×	○	○
	Rod side	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○
40	Head side	×	○	○	×	○	○	×	○	○	×	○	○	×	○	○
	Rod side	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○
50	Head side	×	○	○	×	○	○	×	○	○	×	○	○	×	○	○
	Rod side	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○
60	Head side	×	○	○	×	○	○	×	○	○	×	○	○	×	○	○
	Rod side	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○
70	Head side	×	○	○	×	○	○	×	○	○	×	○	○	×	○	○
	Rod side	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○
80	Head side	×	○	○	×	○	○	×	○	○	×	○	○	×	○	○
	Rod side	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○
90	Head side	×	○	○	×	○	○	×	○	○	×	○	○	×	○	○
	Rod side	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○
100	Head side	×	○	○	×	○	○	×	○	○	×	○	○	×	○	○
	Rod side	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○
110	Head side	×	○	○	×	○	○	×	○	○	×	○	○	×	○	○
	Rod side	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○
120	Head side	×	○	○	×	○	○	×	○	○	×	○	○	×	○	○
	Rod side	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○
130	Head side	×	○	○	×	○	○	×	○	○	×	○	○	×	○	○
	Rod side	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○
140	Head side	×	○	○	×	○	○	×	○	○	×	○	○	×	○	○
	Rod side	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○
150	Head side	×	○	○	×	○	○	×	○	○	×	○	○	×	○	○
	Rod side	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○
160	Head side	×	○	○	×	○	○	×	○	○	×	○	○	×	○	○
	Rod side	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○
170	Head side	×	○	○	×	○	○	×	○	○	×	○	○	×	○	○
	Rod side	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○
180	Head side	×	○	○	×	○	○	×	○	○	×	○	○	×	○	○
	Rod side	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○
190	Head side	×	○	○	×	○	○	×	○	○	×	○	○	×	○	○
	Rod side	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○
200	Head side	×	○	○	×	○	○	×	○	○	×	○	○	×	○	○
	Rod side	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○

Note: The undetectable stroke range appears due to interference between the sensor switch and the body mounting bolts.

- Loosening the mounting screw allows the sensor switch to be moved along the switch mounting groove of the cylinder body.
- Tighten the mounting screw with a tightening torque of 0.1~0.2N·m [0.9~1.8in·lbf].

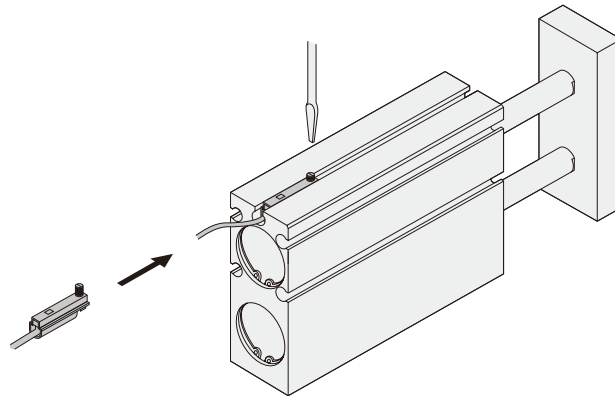

● Reed switch type


○ : Mountable △ : Either head side or rod side × : Unmountable — : Fully detectable within stroke (mm)

[illegible]

Note: The undetectable stroke range appears due to interference between the sensor switch and the body mounting bolts.

■ Moving sensor switch

- Loosening the mounting screw allows the sensor switch to be moved along the switch mounting groove of the cylinder body.
- Tighten the mounting screw with a tightening torque of 0.1~0.2N·m [0.9~1.8in·lbf].

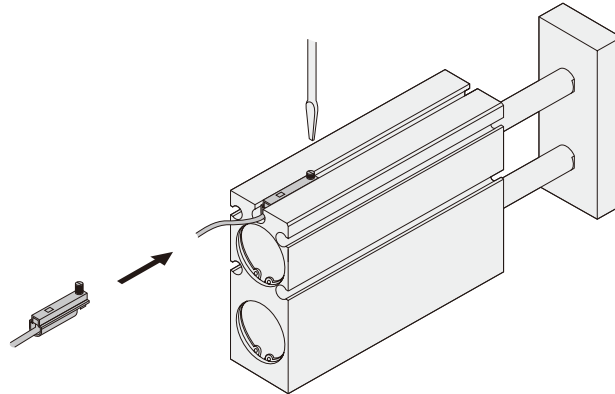

● Reed switch type

○ : Mountable △ : Either head side or rod side × : Unmountable — : Fully detectable within stroke (mm)


Bore size	Stroke	Mounting groove	φ 10			φ 16			φ 20			φ 25			φ 32		
			A	B	C	A	B	C	A	B	C	A	B	C	A	B	C
			Undetectable stroke range of sensor switch			Undetectable stroke range of sensor switch			Undetectable stroke range of sensor switch			Undetectable stroke range of sensor switch			Undetectable stroke range of sensor switch		
10	Head side		△	△	△	Groove A (E) : — Groove B (D) : 5~10 Groove C : 6~10	△	×	△	△	○	△	△	△	△	△	△
	Rod side		△	△	△	Groove A (E) : — Groove B (D) : 8~10 Groove C : —	△	×	×	△	×	×	△	△	△	△	△
20	Head side		○	○	○	Groove A (E) : — Groove B (D) : 15~20 Groove C : 16~20	○	○	○	○	△	○	○	△	○	○	△
	Rod side		○	×	×	Groove A (E) : — Groove B (D) : 15~20 Groove C : 17~20	○	×	×	○	×	×	○	×	×	×	×
30	Head side		○	○	○	Groove A (E) : — Groove B (D) : 19~30 Groove C : 20~30	○	○	○	○	△	○	○	△	○	○	△
	Rod side		○	×	×	Groove A (E) : — Groove B (D) : 20~30 Groove C : 22~30	○	×	×	○	×	×	○	×	×	×	×
40	Head side		○	○	○	Groove A (E) : — Groove B (D) : 25~40 Groove C : 26~40	○	○	○	○	△	○	○	△	○	○	△
	Rod side		○	×	×	Groove A (E) : — Groove B (D) : 25~40 Groove C : 27~40	○	×	×	○	×	×	○	×	×	×	×
50	Head side		○	○	○	Groove A (E) : — Groove B (D) : 30~47 Groove C : 31~46	○	○	○	○	△	○	○	△	○	○	△
	Rod side		○	○	○	Groove A (E) : — Groove B (D) : 30~47 Groove C : 32~47	○	○	○	○	×	×	○	×	×	×	×
60	Head side		○	○	○	Groove A (E) : — Groove B (D) : 35~52 Groove C : 36~51	○	○	○	○	△	○	○	△	○	○	△
	Rod side		○	○	○	Groove A (E) : — Groove B (D) : 35~52 Groove C : 37~52	○	○	○	○	×	×	○	×	×	×	×
70	Head side		○	○	○	Groove A (E) : — Groove B (D) : 40~57 Groove C : 41~56	○	○	○	○	△	○	○	△	○	○	△
	Rod side		○	○	○	Groove A (E) : — Groove B (D) : 40~57 Groove C : 42~57	○	○	○	○	×	×	○	×	×	×	×
80	Head side		○	○	○	Groove A (E) : — Groove B (D) : 45~62 Groove C : 46~61	○	○	○	○	△	○	○	△	○	○	△
	Rod side		○	○	○	Groove A (E) : — Groove B (D) : 45~62 Groove C : 47~62	○	○	○	○	×	×	○	×	×	×	×
90	Head side		○	○	○	Groove A (E) : — Groove B (D) : 50~67 Groove C : 51~66	○	○	○	○	△	○	○	△	○	○	△
	Rod side		○	○	○	Groove A (E) : — Groove B (D) : 50~67 Groove C : 52~67	○	○	○	○	×	×	○	×	×	×	×
100	Head side		○	○	○	Groove A (E) : — Groove B (D) : 55~72 Groove C : 56~71	○	○	○	○	△	○	○	△	○	○	△
	Rod side		○	○	○	Groove A (E) : — Groove B (D) : 55~72 Groove C : 57~72	○	○	○	○	×	×	○	×	×	×	×
110	Head side		○	○	○	Groove A (E) : — Groove B (D) : 60~77 Groove C : 61~76	○	○	○	○	△	○	○	△	○	○	△
	Rod side		○	○	○	Groove A (E) : — Groove B (D) : 60~77 Groove C : 62~77	○	○	○	○	×	×	○	×	×	×	×
120	Head side		○	○	○	Groove A (E) : — Groove B (D) : 65~82 Groove C : 66~81	○	○	○	○	△	○	○	△	○	○	△
	Rod side		○	○	○	Groove A (E) : — Groove B (D) : 65~82 Groove C : 67~82	○	○	○	○	×	×	○	×	×	×	×
130	Head side		○	○	○	Groove A (E) : — Groove B (D) : 70~87 Groove C : 71~86	○	○	○	○	△	○	○	△	○	○	△
	Rod side		○	○	○	Groove A (E) : — Groove B (D) : 70~87 Groove C : 72~87	○	○	○	○	×	×	○	×	×	×	×
140	Head side		○	○	○	Groove A (E) : — Groove B (D) : 75~92 Groove C : 76~91	○	○	○	○	△	○	○	△	○	○	△
	Rod side		○	○	○	Groove A (E) : — Groove B (D) : 75~92 Groove C : 77~92	○	○	○	○	×	×	○	×	×	×	×
150	Head side		○	○	○	Groove A (E) : — Groove B (D) : 80~99 Groove C : 82~97	○	○	○	○	△	○	○	△	○	○	△
	Rod side		○	○	○	Groove A (E) : — Groove B (D) : 80~99 Groove C : 83~97	○	○	○	○	×	×	○	×	×	×	×
160	Head side		○	○	○	Groove A (E) : — Groove B (D) : 85~104 Groove C : 87~102	○	○	○	○	△	○	○	△	○	○	△
	Rod side		○	○	○	Groove A (E) : — Groove B (D) : 85~104 Groove C : 88~102	○	○	○	○	×	×	○	×	×	×	×
170	Head side		○	○	○	Groove A (E) : — Groove B (D) : 90~109 Groove C : 92~107	○	○	○	○	△	○	○	△	○	○	△
	Rod side		○	○	○	Groove A (E) : — Groove B (D) : 90~109 Groove C : 93~107	○	○	○	○	×	×	○	×	×	×	×
180	Head side		○	○	○	Groove A (E) : — Groove B (D) : 95~114 Groove C : 97~112	○	○	○	○	△	○	○	△	○	○	△
	Rod side		○	○	○	Groove A (E) : — Groove B (D) : 95~114 Groove C : 98~112	○	○	○	○	×	×	○	×	×	×	×
190	Head side		○	○	○	Groove A (E) : — Groove B (D) : 100~119 Groove C : 102~117	○	○	○	○	△	○	○	△	○	○	△
	Rod side		○	○	○	Groove A (E) : — Groove B (D) : 100~119 Groove C : 103~117	○	○	○	○	×	×	○	×	×	×	×
200	Head side		○	○	○	Groove A (E) : — Groove B (D) : 105~124 Groove C : 107~122	○	○	○	○	△	○	○	△	○	○	△
	Rod side		○	○	○	Groove A (E) : — Groove B (D) : 105~124 Groove C : 108~122	○	○	○	○	×	×	○	×	×	×	×

Note: The undetectable stroke range appears due to interference between the sensor switch and the body mounting bolts.


Mountable or Unmountable Sensor Switch and Undetectable Stroke Range at End of Stroke

Double acting long bushing type (TBDAM)

■ In the case of using 3 head side mounting holes on the body

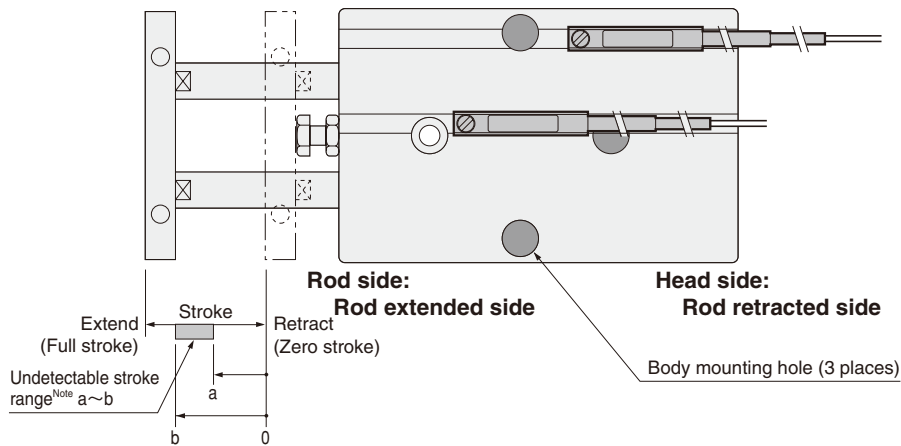

● Sensor switch mounting surface



Mounting a sensor switch in any of the grooves A~E allows detection at either the head side or rod side stroke end, and intermediate positions. The diagram shows the rod side with the square plate removed.

Note: The undetectable stroke range is the value measured from the zero stroke with 1 sensor switch installation.

● Solid state type


○ : Mountable △ : Either head side or rod side × : Unmountable — : Fully detectable within stroke (mm)

Bore size	Mounting groove	A	B	C	Undetectable stroke range of sensor switch	A	B	C	Undetectable stroke range of sensor switch	A	B	C	Undetectable stroke range of sensor switch	A	B	C	Undetectable stroke range of sensor switch	A	B	C	Undetectable stroke range of sensor switch
Stroke		E	D			E	D			E	D			E	D			E	D		
10	Head side	×	△	○	Groove A (E) : 0~10 Groove B (D) : 7~10 Groove C : 8~10	×	△	○	Groove A (E) : 0~10 Groove B (D) : 8~10 Groove C : —	○	○	△	Groove A (E) : 2~10 Groove B (D) : 8~10 Groove C : —	○	△	△	Groove A (E) : — Groove B (D), C : —	×	△	△	Groove A (E) : 0~10 Groove B (D) : 9~10 Groove C : —
	Rod side	×	△	○		×	△	○		×	×	△		○	△	△		×	△	△	
20	Head side	×	○	○	Groove A (E) : 0~11 Groove B (D) : 17~20 Groove C : 18~20	×	○	○	Groove A (E) : 0~12 Groove B (D) : 17~20 Groove C : 19~20	○	○	△	Groove A (E) : 2~15 Groove B (D) : 18~20 Groove C : —	○	△	△	Groove A (E) : — Groove B (D), C : —	×	○	△	Groove A (E) : 0~14 Groove B (D) : 19~20 Groove C : —
	Rod side	○	×	×		○	×	×		○	×	×		○	×	×		○	×	×	
30	Head side	×	○	○	Groove A (E) : 0~11 Groove B (D) : 21~30 Groove C : 22~30	×	○	○	Groove A (E) : 0~12 Groove B (D) : 22~30 Groove C : 24~30	○	○	○	Groove A (E) : 2~15 Groove B (D) : 26~30 Groove C : 28~30	○	○	○	Groove A (E) : — Groove B (D), C : 27~30	×	○	○	Groove A (E) : 0~14 Groove B (D) : 27~30 Groove C : 28~30
	Rod side	○	×	×		○	×	×		○	×	×		○	×	×		○	×	×	
40	Head side	×	○	○	Groove A (E) : 0~11 Groove B (D) : 27~40 Groove C : 28~40	×	○	○	Groove A (E) : 0~12 Groove B (D) : 27~40 Groove C : 29~40	○	○	○	Groove A (E) : 2~15 Groove B (D) : 31~40 Groove C : 33~40	○	○	○	Groove A (E) : — Groove B (D), C : 32~40	×	○	○	Groove A (E) : 0~14 Groove B (D) : 32~40 Groove C : 33~40
	Rod side	○	×	×		○	×	×		○	×	×		○	×	×		○	×	×	
50	Head side	×	○	○	Groove A (E) : 0~11 Groove B (D) : 32~45 Groove C : 33~44	×	○	○	Groove A (E) : 0~12 Groove B (D) : 32~46 Groove C : 34~44	○	○	○	Groove A (E) : 2~15 Groove B (D) : 36~50 Groove C : 39~50	○	○	○	Groove A (E) : — Groove B (D), C : 37~49	×	○	○	Groove A (E) : 0~14 Groove B (D) : 37~49 Groove C : 38~48
	Rod side	○	×	○		○	×	○		○	×	×		○	×	○		○	×	○	
60	Head side	×	○	○	Groove A (E) : 0~11 Groove B (D) : 37~50 Groove C : 38~49	×	○	○	Groove A (E) : 0~12 Groove B (D) : 37~51 Groove C : 39~49	○	○	○	Groove A (E) : 2~15 Groove B (D) : 41~57 Groove C : 43~55	○	○	○	Groove A (E) : — Groove B (D), C : 42~54	×	○	○	Groove A (E) : 0~14 Groove B (D) : 42~54 Groove C : 43~53
	Rod side	○	○	○		○	○	○		○	○	○		○	○	○		○	○	○	
70	Head side	×	○	○	Groove A (E) : 0~11 Groove B (D) : 42~55 Groove C : 43~54	×	○	○	Groove A (E) : 0~12 Groove B (D) : 42~56 Groove C : 44~54	○	○	○	Groove A (E) : 2~15 Groove B (D) : 46~62 Groove C : 48~60	○	○	○	Groove A (E) : — Groove B (D), C : 47~59	×	○	○	Groove A (E) : 0~14 Groove B (D) : 47~59 Groove C : 48~58
	Rod side	○	○	○		○	○	○		○	○	○		○	○	○		○	○	○	
80	Head side	×	○	○	Groove A (E) : 0~11 Groove B (D) : 47~60 Groove C : 48~59	×	○	○	Groove A (E) : 0~12 Groove B (D) : 47~61 Groove C : 49~59	○	○	○	Groove A (E) : 2~15 Groove B (D) : 51~67 Groove C : 53~65	○	○	○	Groove A (E) : — Groove B (D), C : 52~64	×	○	○	Groove A (E) : 0~14 Groove B (D) : 52~64 Groove C : 53~63
	Rod side	○	○	○		○	○	○		○	○	○		○	○	○		○	○	○	
90	Head side	×	○	○	Groove A (E) : 0~11 Groove B (D) : 52~65 Groove C : 53~64	×	○	○	Groove A (E) : 0~12 Groove B (D) : 52~66 Groove C : 54~64	○	○	○	Groove A (E) : 2~15 Groove B (D) : 56~72 Groove C : 58~70	○	○	○	Groove A (E) : — Groove B (D), C : 57~69	×	○	○	Groove A (E) : 0~14 Groove B (D) : 57~69 Groove C : 58~68
	Rod side	○	○	○		○	○	○		○	○	○		○	○	○		○	○	○	
100	Head side	×	○	○	Groove A (E) : 0~11 Groove B (D) : 57~70 Groove C : 58~69	×	○	○	Groove A (E) : 0~12 Groove B (D) : 57~71 Groove C : 59~69	○	○	○	Groove A (E) : 2~15 Groove B (D) : 61~77 Groove C : 63~75	○	○	○	Groove A (E) : — Groove B (D), C : 62~74	×	○	○	Groove A (E) : 0~14 Groove B (D) : 62~74 Groove C : 63~73
	Rod side	○	○	○		○	○	○		○	○	○		○	○	○		○	○	○	
110	Head side	×	○	○	Groove A (E) : 0~11 Groove B (D) : 62~75 Groove C : 63~74	×	○	○	Groove A (E) : 0~12 Groove B (D) : 62~76 Groove C : 64~74	○	○	○	Groove A (E) : 2~15 Groove B (D) : 66~82 Groove C : 68~80	○	○	○	Groove A (E) : — Groove B (D), C : 67~79	×	○	○	Groove A (E) : 0~14 Groove B (D) : 67~79 Groove C : 68~78
	Rod side	○	○	○		○	○	○		○	○	○		○	○	○		○	○	○	
120	Head side	×	○	○	Groove A (E) : 0~11 Groove B (D) : 67~80 Groove C : 68~79	×	○	○	Groove A (E) : 0~12 Groove B (D) : 67~81 Groove C : 69~79	○	○	○	Groove A (E) : 2~15 Groove B (D) : 71~87 Groove C : 73~87	○	○	○	Groove A (E) : — Groove B (D), C : 72~84	×	○	○	Groove A (E) : 0~14 Groove B (D) : 72~84 Groove C : 73~83
	Rod side	○	○	○		○	○	○		○	○	○		○	○	○		○	○	○	
130	Head side	×	○	○	Groove A (E) : 0~11 Groove B (D) : 72~85 Groove C : 73~84	×	○	○	Groove A (E) : 0~12 Groove B (D) : 72~86 Groove C : 74~84	○	○	○	Groove A (E) : 2~15 Groove B (D) : 76~92 Groove C : 78~90	○	○	○	Groove A (E) : — Groove B (D), C : 77~89	×	○	○	Groove A (E) : 0~14 Groove B (D) : 77~89 Groove C : 78~88
	Rod side	○	○	○		○	○	○		○	○	○		○	○	○		○	○	○	
140	Head side	×	○	○	Groove A (E) : 0~11 Groove B (D) : 77~90 Groove C : 78~89	×	○	○	Groove A (E) : 0~12 Groove B (D) : 77~91 Groove C : 79~89	○	○	○	Groove A (E) : 2~15 Groove B (D) : 81~97 Groove C : 83~95	○	○	○	Groove A (E) : — Groove B (D), C : 82~94	×	○	○	Groove A (E) : 0~14 Groove B (D) : 82~94 Groove C : 83~93
	Rod side	○	○	○		○	○	○		○	○	○		○	○	○		○	○	○	
150	Head side	×	○	○	Groove A (E) : 0~11 Groove B (D) : 82~96 Groove C : 84~94	×	○	○	Groove A (E) : 0~12 Groove B (D) : 82~96 Groove C : 84~94	○	○	○	Groove A (E) : 2~15 Groove B (D) : 86~102 Groove C : 88~100	○	○	○	Groove A (E) : — Groove B (D), C : 87~99	×	○	○	Groove A (E) : 0~14 Groove B (D) : 87~99 Groove C : 88~98
	Rod side	○	○	○		○	○	○		○	○	○		○	○	○		○	○	○	
160	Head side	×	○	○	Groove A (E) : 0~11 Groove B (D) : 87~101 Groove C : 89~99	×	○	○	Groove A (E) : 0~12 Groove B (D) : 87~101 Groove C : 89~99	○	○	○	Groove A (E) : 2~15 Groove B (D) : 91~107 Groove C : 93~105	○	○	○	Groove A (E) : — Groove B (D), C : 92~104	×	○	○	Groove A (E) : 0~14 Groove B (D) : 92~104 Groove C : 93~103
	Rod side	○	○	○		○	○	○		○	○	○		○	○	○		○	○	○	
170	Head side	×	○	○	Groove A (E) : 0~11 Groove B (D) : 92~106 Groove C : 94~104	×	○	○	Groove A (E) : 0~12 Groove B (D) : 92~106 Groove C : 94~104	○	○	○	Groove A (E) : 2~15 Groove B (D) : 96~112 Groove C : 98~110	○	○	○	Groove A (E) : — Groove B (D), C : 97~109	×	○	○	Groove A (E) : 0~14 Groove B (D) : 97~109 Groove C : 98~108
	Rod side	○	○	○		○	○	○		○	○	○		○	○	○		○	○	○	
180	Head side	×	○	○	Groove A (E) : 0~11 Groove B (D) : 97~111 Groove C : 99~109	×	○	○	Groove A (E) : 0~12 Groove B (D) : 97~111 Groove C : 99~109	○	○	○	Groove A (E) : 2~15 Groove B (D) : 101~117 Groove C : 103~115	○	○	○	Groove A (E) : — Groove B (D), C : 102~114	×	○	○	Groove A (E) : 0~14 Groove B (D) : 102~114 Groove C : 103~113
	Rod side	○	○	○		○	○	○		○	○	○		○	○	○		○	○	○	
190	Head side	×	○	○	Groove A (E) : 0~11 Groove B (D) : 102~116 Groove C : 104~114	×	○	○	Groove A (E) : 0~12 Groove B (D) : 102~116 Groove C : 104~114	○	○	○	Groove A (E) : 2~15 Groove B (D) : 106~122 Groove C : 108~120	○	○	○	Groove A (E) : — Groove B (D), C : 107~119	×	○	○	Groove A (E) : 0~14 Groove B (D) : 107~119 Groove C : 108~118
	Rod side	○	○	○		○	○	○		○	○	○		○	○	○		○	○	○	
200	Head side	×	○	○	Groove A (E) : 0~11 Groove B (D) : 107~121 Groove C : 109~119	×	○	○	Groove A (E) : 0~12 Groove B (D) : 107~121 Groove C : 109~119	○	○	○	Groove A (E) : 2~15 Groove B (D) : 111~127 Groove C : 113~125	○	○	○	Groove A (E) : — Groove B (D), C : 112~124	×	○	○	Groove A (E) : 0~14 Groove B (D) : 112~124 Groove C : 113~123
	Rod side	○	○	○		○	○	○		○	○	○		○	○	○		○	○	○	

Note: The undetectable stroke range appears due to interference between the sensor switch and the body mounting bolts.

■ Moving sensor switch

- Loosening the mounting screw allows the sensor switch to be moved along the switch mounting groove of the cylinder body.
- Tighten the mounting screw with a tightening torque of 0.1~0.2N·m [0.9~1.8in·lbf].

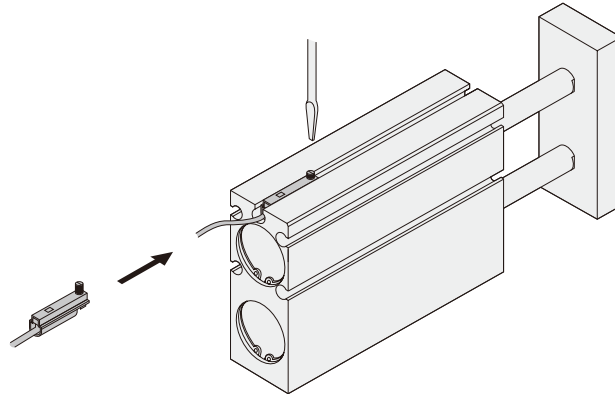

● Reed switch type



○ : Mountable △ : Either head side or rod side × : Unmountable — : Fully detectable within stroke (mm)

Bore size	Mounting groove	φ 10				φ 16				φ 20				φ 25				φ 32			
		A	B	C	Undetectable stroke range of sensor switch	A	B	C	Undetectable stroke range of sensor switch	A	B	C	Undetectable stroke range of sensor switch	A	B	C	Undetectable stroke range of sensor switch				
		E	D	E		D	E	D		E	D	E		D	E	D					
Stroke																					
10	Head side	×	△	△	Groove A (E) : 0~10 Groove B (D) : 5~10 Groove C : 6~10	×	×	△	Groove A (E) : 0~10 Groove B (D) : 8~10 Groove C : —	×	○	○	Groove A (E) : 0~10 Groove B (D) : 8~10 Groove C : 10	△	○	△	Groove A (E) : — Groove B (D), C : —	×	△	△	Groove A (E) : 0~10 Groove B (D) : 9~10 Groove C : —
	Rod side	×	△	△		×	×	△		×	×	×		△	×	△		×	△	△	
20	Head side	×	○	○	Groove A (E) : 0~13 Groove B (D) : 15~20 Groove C : 16~20	×	○	○	Groove A (E) : 0~14 Groove B (D) : 15~20 Groove C : 17~20	×	○	○	Groove A (E) : 0~17 Groove B (D) : 18~20 Groove C : —	○	○	△	Groove A (E) : — Groove B (D), C : —	×	○	△	Groove A (E) : 0~14 Groove B (D) : 19~20 Groove C : —
	Rod side	○	×	×		○	×	×		○	×	△		○	×	△		○	×	△	
30	Head side	×	○	○	Groove A (E) : 0~13 Groove B (D) : 19~30 Groove C : 20~30	×	○	○	Groove A (E) : 0~14 Groove B (D) : 20~30 Groove C : 22~30	×	○	○	Groove A (E) : 0~17 Groove B (D) : 24~30 Groove C : 26~30	○	○	○	Groove A (E) : — Groove B (D), C : 26~30	×	○	○	Groove A (E) : 0~14 Groove B (D) : 27~30 Groove C : 28~30
	Rod side	○	×	×		○	×	×		○	×	×		○	×	×		○	×	×	
40	Head side	×	○	○	Groove A (E) : 0~13 Groove B (D) : 25~40 Groove C : 26~40	×	○	○	Groove A (E) : 0~14 Groove B (D) : 25~40 Groove C : 27~40	×	○	○	Groove A (E) : 0~17 Groove B (D) : 29~40 Groove C : 31~40	○	○	○	Groove A (E) : — Groove B (D), C : 31~40	×	○	○	Groove A (E) : 0~14 Groove B (D) : 32~40 Groove C : 33~40
	Rod side	○	×	×		○	○	○		○	×	×		○	×	×		○	×	×	
50	Head side	×	○	○	Groove A (E) : 0~13 Groove B (D) : 30~47 Groove C : 31~46	×	○	○	Groove A (E) : 0~14 Groove B (D) : 30~49 Groove C : 32~47	×	○	○	Groove A (E) : 0~17 Groove B (D) : 34~50 Groove C : 36~50	○	○	○	Groove A (E) : — Groove B (D), C : 36~50	×	○	○	Groove A (E) : 0~14 Groove B (D) : 37~49 Groove C : 38~48
	Rod side	○	○	○		○	○	○		○	×	×		○	×	×		○	×	○	
60	Head side	×	○	○	Groove A (E) : 0~13 Groove B (D) : 35~52 Groove C : 36~51	×	○	○	Groove A (E) : 0~14 Groove B (D) : 35~54 Groove C : 37~52	×	○	○	Groove A (E) : 0~17 Groove B (D) : 39~59 Groove C : 41~57	○	○	○	Groove A (E) : — Groove B (D), C : 41~56	×	○	○	Groove A (E) : 0~14 Groove B (D) : 42~54 Groove C : 43~53
	Rod side	○	○	○		○	○	○		○	○	○		○	○	○		○	○	○	
70	Head side	×	○	○	Groove A (E) : 0~13 Groove B (D) : 40~57 Groove C : 41~56	×	○	○	Groove A (E) : 0~14 Groove B (D) : 40~59 Groove C : 42~57	×	○	○	Groove A (E) : 0~17 Groove B (D) : 44~64 Groove C : 46~62	○	○	○	Groove A (E) : — Groove B (D), C : 46~61	×	○	○	Groove A (E) : 0~14 Groove B (D) : 47~59 Groove C : 48~58
	Rod side	○	○	○		○	○	○		○	○	○		○	○	○		○	○	○	
80	Head side	×	○	○	Groove A (E) : 0~13 Groove B (D) : 45~62 Groove C : 46~61	×	○	○	Groove A (E) : 0~12 Groove B (D) : 45~64 Groove C : 47~62	×	○	○	Groove A (E) : 0~17 Groove B (D) : 49~69 Groove C : 51~62	○	○	○	Groove A (E) : — Groove B (D), C : 51~66	×	○	○	Groove A (E) : 0~14 Groove B (D) : 52~64 Groove C : 53~63
	Rod side	○	○	○		○	○	○		○	○	○		○	○	○		○	○	○	
90	Head side	×	○	○	Groove A (E) : 0~13 Groove B (D) : 50~67 Groove C : 51~66	×	○	○	Groove A (E) : 0~14 Groove B (D) : 50~69 Groove C : 52~67	×	○	○	Groove A (E) : 0~17 Groove B (D) : 54~74 Groove C : 56~72	○	○	○	Groove A (E) : — Groove B (D), C : 56~71	×	○	○	Groove A (E) : 0~14 Groove B (D) : 57~69 Groove C : 58~68
	Rod side	○	○	○		○	○	○		○	○	○		○	○	○		○	○	○	
100	Head side	×	○	○	Groove A (E) : 0~13 Groove B (D) : 55~72 Groove C : 56~71	×	○	○	Groove A (E) : 0~14 Groove B (D) : 55~74 Groove C : 57~72	×	○	○	Groove A (E) : 0~17 Groove B (D) : 59~79 Groove C : 61~77	○	○	○	Groove A (E) : — Groove B (D), C : 61~76	×	○	○	Groove A (E) : 0~14 Groove B (D) : 62~74 Groove C : 63~73
	Rod side	○	○	○		○	○	○		○	○	○		○	○	○		○	○	○	
110	Head side	×	○	○	Groove A (E) : 0~13 Groove B (D) : 60~77 Groove C : 61~76	×	○	○	Groove A (E) : 0~14 Groove B (D) : 60~79 Groove C : 62~77	×	○	○	Groove A (E) : 0~17 Groove B (D) : 64~84 Groove C : 66~82	○	○	○	Groove A (E) : — Groove B (D), C : 66~81	×	○	○	Groove A (E) : 0~14 Groove B (D) : 67~79 Groove C : 68~78
	Rod side	○	○	○		○	○	○		○	○	○		○	○	○		○	○	○	
120	Head side	×	○	○	Groove A (E) : 0~13 Groove B (D) : 65~82 Groove C : 66~81	×	○	○	Groove A (E) : 0~14 Groove B (D) : 65~84 Groove C : 67~82	×	○	○	Groove A (E) : 0~17 Groove B (D) : 69~89 Groove C : 71~87	○	○	○	Groove A (E) : — Groove B (D), C : 71~86	×	○	○	Groove A (E) : 0~14 Groove B (D) : 72~84 Groove C : 73~83
	Rod side	○	○	○		○	○	○		○	○	○		○	○	○		○	○	○	
130	Head side	×	○	○	Groove A (E) : 0~13 Groove B (D) : 70~87 Groove C : 71~86	×	○	○	Groove A (E) : 0~14 Groove B (D) : 70~89 Groove C : 72~87	×	○	○	Groove A (E) : 0~17 Groove B (D) : 74~94 Groove C : 76~92	○	○	○	Groove A (E) : — Groove B (D), C : 76~91	×	○	○	Groove A (E) : 0~14 Groove B (D) : 77~89 Groove C : 78~88
	Rod side	○	○	○		○	○	○		○	○	○		○	○	○		○	○	○	
140	Head side	×	○	○	Groove A (E) : 0~13 Groove B (D) : 75~92 Groove C : 76~91	×	○	○	Groove A (E) : 0~14 Groove B (D) : 75~94 Groove C : 77~92	×	○	○	Groove A (E) : 0~17 Groove B (D) : 79~99 Groove C : 81~97	○	○	○	Groove A (E) : — Groove B (D), C : 81~96	×	○	○	Groove A (E) : 0~14 Groove B (D) : 82~94 Groove C : 83~93
	Rod side	○	○	○		○	○	○		○	○	○		○	○	○		○	○	○	
150	Head side					×	○	○	Groove A (E) : 0~14 Groove B (D) : 80~99 Groove C : 82~97	×	○	○	Groove A (E) : 0~17 Groove B (D) : 84~104 Groove C : 86~102	○	○	○	Groove A (E) : — Groove B (D), C : 86~101	×	○	○	Groove A (E) : 0~14 Groove B (D) : 87~99 Groove C : 88~98
	Rod side					○	○	○		○	○	○		○	○	○		○	○	○	
160	Head side					×	○	○	Groove A (E) : 0~14 Groove B (D) : 85~104 Groove C : 87~102	×	○	○	Groove A (E) : 0~17 Groove B (D) : 89~109 Groove C : 91~107	○	○	○	Groove A (E) : — Groove B (D), C : 91~106	×	○	○	Groove A (E) : 0~14 Groove B (D) : 92~104 Groove C : 93~103
	Rod side					○	○	○		○	○	○		○	○	○		○	○	○	
170	Head side					×	○	○	Groove A (E) : 0~14 Groove B (D) : 90~109 Groove C : 92~107	×	○	○	Groove A (E) : 2~25 Groove B (D) : 94~114 Groove C : 96~112	○	○	○	Groove A (E) : — Groove B (D), C : 96~111	×	○	○	Groove A (E) : 0~14 Groove B (D) : 97~109 Groove C : 98~108
	Rod side					○	○	○		○	○	○		○	○	○		○	○	○	
180	Head side					×	○	○	Groove A (E) : 0~14 Groove B (D) : 95~114 Groove C : 97~112	×	○	○	Groove A (E) : 0~17 Groove B (D) : 99~119 Groove C : 101~117	○	○	○	Groove A (E) : — Groove B (D), C : 101~116	×	○	○	Groove A (E) : 0~14 Groove B (D) : 102~114 Groove C : 103~113
	Rod side					○	○	○		○	○	○		○	○	○		○	○	○	
190	Head side					×	○	○	Groove A (E) : 0~14 Groove B (D) : 100~119 Groove C : 102~117	×	○	○	Groove A (E) : 0~17 Groove B (D) : 104~124 Groove C : 106~122	○	○	○	Groove A (E) : — Groove B (D), C : 106~121	×	○	○	Groove A (E) : 0~14 Groove B (D) : 107~119 Groove C : 108~118
	Rod side					○	○	○		○	○	○		○	○	○		○	○	○	
200	Head side					×	○	○	Groove A (E) : 0~14 Groove B (D) : 105~124 Groove C : 107~122	×	○	○	Groove A (E) : 0~17 Groove B (D) : 109~129 Groove C : 111~127	○	○	○	Groove A (E) : — Groove B (D), C : 111~126	×	○	○	Groove A (E) : 0~14 Groove B (D) : 112~124 Groove C : 113~123
	Rod side					○	○	○		○	○	○		○	○	○		○	○	○	

Note: The undetectable stroke range appears due to interference between the sensor switch and the body mounting bolts.

Double acting long bushing type (TBDAM)

● **Sensor switch mounting surface** C

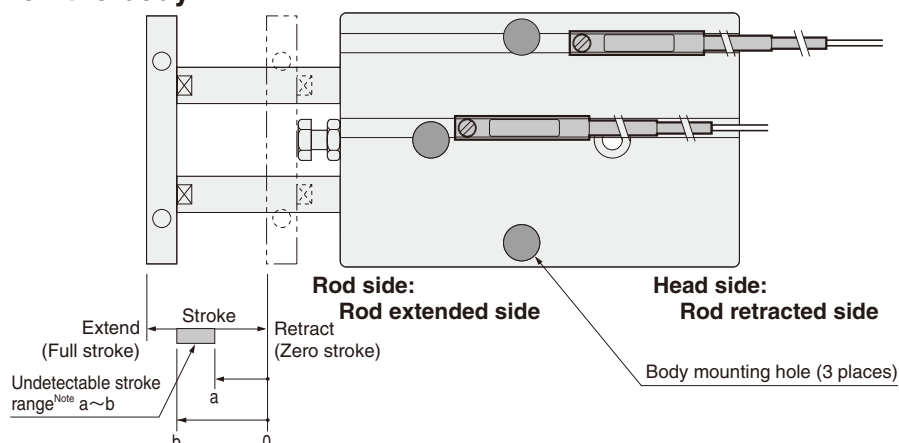

Mounting a sensor switch in any of the grooves **A~E** allows detection at either the head side or rod side stroke end, and intermediate positions. The diagram shows the rod side with the square plate removed

Note: The undetectable stroke range is the value measured from the zero stroke with 1 sensor switch installation.

- **Solid state type**


○ : Mountable △ : Either head side or rod side × : Unmountable — : Fully detectable within stroke (mm)

Bore size		φ 10				φ 16				φ 20				φ 25				φ 32							
Mounting groove		A	B	C	Undetectable stroke range of sensor switch			A	B	C	Undetectable stroke range of sensor switch			A	B	C	Undetectable stroke range of sensor switch			A	B	C	Undetectable stroke range of sensor switch		
Stroke		E	D		E	D		E	D		E	D		E	D		E	D		E	D		E	D	
10	Head side	○	△	○	Groove A (E) : — Groove B (D) : 7~10 Groove C : 8~10			○	△	△	Groove A (E) : — Groove B (D) : 8~10 Groove C : —			△	○	△	Groove A (E) : — Groove B (D) : 8~10 Groove C : —			○	△	△	Groove A (E) : — Groove B (D) : 9~10 Groove C : —		
	Rod side	○	△	○				○	△	△				△	×	△				○	△	△			
20	Head side	○	○	○	Groove A (E) : — Groove B (D) : 17~20 Groove C : 18~20			○	○	○	Groove A (E) : — Groove B (D) : 17~20 Groove C : 19~20			○	○	○	Groove A (E) : — Groove B (D) : 18~20 Groove C : —			○	○	○	Groove A (E) : — Groove B (D) : 19~20 Groove C : —		
	Rod side	○	×	×				○	×	×				○	×	×				○	△	△			
30	Head side	○	○	○	Groove A (E) : — Groove B (D) : 21~30 Groove C : 22~30			○	○	○	Groove A (E) : — Groove B (D) : 22~30 Groove C : 24~30			○	○	○	Groove A (E) : — Groove B (D) : 26~30 Groove C : 28~30			○	○	○	Groove A (E) : — Groove B (D) : 27~30 Groove C : 28~30		
	Rod side	○	×	×				○	×	×				○	×	×				○	×	×			
40	Head side	○	○	○	Groove A (E) : — Groove B (D) : 27~40 Groove C : 28~40			○	○	○	Groove A (E) : — Groove B (D) : 27~40 Groove C : 29~40			○	○	○	Groove A (E) : — Groove B (D) : 31~40 Groove C : 33~40			○	○	○	Groove A (E) : — Groove B (D) : 32~40 Groove C : 33~40		
	Rod side	○	×	×				○	×	×				○	×	×				○	×	×			
50	Head side	○	○	○	Groove A (E) : — Groove B (D) : 32~45 Groove C : 33~44			○	○	○	Groove A (E) : — Groove B (D) : 32~46 Groove C : 34~44			○	○	○	Groove A (E) : — Groove B (D) : 36~50 Groove C : 38~50			○	○	○	Groove A (E) : — Groove B (D) : 37~49 Groove C : 38~48		
	Rod side	○	○	○				○	○	○				○	×	×				○	×	×			
60	Head side	○	○	○	Groove A (E) : — Groove B (D) : 37~50 Groove C : 38~49			○	○	○	Groove A (E) : — Groove B (D) : 37~51 Groove C : 39~49			○	○	○	Groove A (E) : — Groove B (D) : 41~57 Groove C : 43~55			○	○	○	Groove A (E) : — Groove B (D) : 42~54 Groove C : 43~53		
	Rod side	○	○	○				○	○	○				○	○	○				○	○	○			
70	Head side	○	○	○	Groove A (E) : — Groove B (D) : 42~55 Groove C : 43~54			○	○	○	Groove A (E) : — Groove B (D) : 42~56 Groove C : 44~54			○	○	○	Groove A (E) : — Groove B (D) : 46~62 Groove C : 48~60			○	○	○	Groove A (E) : — Groove B (D) : 47~59 Groove C : 48~58		
	Rod side	○	○	○				○	○	○				○	○	○				○	○	○			
80	Head side	○	○	○	Groove A (E) : — Groove B (D) : 47~60 Groove C : 48~59			○	○	○	Groove A (E) : — Groove B (D) : 47~61 Groove C : 49~59			○	○	○	Groove A (E) : — Groove B (D) : 51~67 Groove C : 53~65			○	○	○	Groove A (E) : — Groove B (D) : 52~64 Groove C : 53~63		
	Rod side	○	○	○				○	○	○				○	○	○				○	○	○			
90	Head side	○	○	○	Groove A (E) : — Groove B (D) : 52~65 Groove C : 53~64			○	○	○	Groove A (E) : — Groove B (D) : 52~66 Groove C : 54~64			○	○	○	Groove A (E) : — Groove B (D) : 56~72 Groove C : 58~70			○	○	○	Groove A (E) : — Groove B (D) : 57~69 Groove C : 58~68		
	Rod side	○	○	○				○	○	○				○	○	○				○	○	○			
100	Head side	○	○	○	Groove A (E) : — Groove B (D) : 57~70 Groove C : 58~69			○	○	○	Groove A (E) : — Groove B (D) : 57~71 Groove C : 59~69			○	○	○	Groove A (E) : — Groove B (D) : 61~77 Groove C : 63~75			○	○	○	Groove A (E) : — Groove B (D) : 62~74 Groove C : 63~73		
	Rod side	○	○	○				○	○	○				○	○	○				○	○	○			
110	Head side	○	○	○	Groove A (E) : — Groove B (D) : 62~75 Groove C : 63~74			○	○	○	Groove A (E) : — Groove B (D) : 62~76 Groove C : 64~74			○	○	○	Groove A (E) : — Groove B (D) : 66~82 Groove C : 68~80			○	○	○	Groove A (E) : — Groove B (D) : 67~79 Groove C : 68~78		
	Rod side	○	○	○				○	○	○				○	○	○				○	○	○			
120	Head side	○	○	○	Groove A (E) : — Groove B (D) : 67~80 Groove C : 68~79			○	○	○	Groove A (E) : — Groove B (D) : 67~81 Groove C : 69~79			○	○	○	Groove A (E) : — Groove B (D) : 71~87 Groove C : 73~85			○	○	○	Groove A (E) : — Groove B (D) : 72~84 Groove C : 73~83		
	Rod side	○	○	○				○	○	○				○	○	○				○	○	○			
130	Head side	○	○	○	Groove A (E) : — Groove B (D) : 72~85 Groove C : 73~84			○	○	○	Groove A (E) : — Groove B (D) : 72~86 Groove C : 74~84			○	○	○	Groove A (E) : — Groove B (D) : 76~92 Groove C : 78~90			○	○	○	Groove A (E) : — Groove B (D) : 77~89 Groove C : 78~88		
	Rod side	○	○	○				○	○	○				○	○	○				○	○	○			
140	Head side	○	○	○	Groove A (E) : — Groove B (D) : 77~90 Groove C : 78~89			○	○	○	Groove A (E) : — Groove B (D) : 77~91 Groove C : 79~89			○	○	○	Groove A (E) : — Groove B (D) : 81~97 Groove C : 83~95			○	○	○	Groove A (E) : — Groove B (D) : 82~94 Groove C : 83~93		
	Rod side	○	○	○				○	○	○				○	○	○				○	○	○			
150	Head side	○	○	○				○	○	○	Groove A (E) : — Groove B (D) : 82~96 Groove C : 84~94			○	○	○	Groove A (E) : — Groove B (D) : 86~102 Groove C : 88~100			○	○	○	Groove A (E) : — Groove B (D) : 87~99 Groove C : 88~98		
	Rod side	○	○	○				○	○	○				○	○	○				○	○	○			
160	Head side	○	○	○				○	○	○	Groove A (E) : — Groove B (D) : 87~101 Groove C : 89~99			○	○	○	Groove A (E) : — Groove B (D) : 91~107 Groove C : 93~105			○	○	○	Groove A (E) : — Groove B (D) : 92~104 Groove C : 93~103		
	Rod side	○	○	○				○	○	○				○	○	○				○	○	○			
170	Head side	○	○	○				○	○	○	Groove A (E) : — Groove B (D) : 92~106 Groove C : 94~104			○	○	○	Groove A (E) : — Groove B (D) : 96~112 Groove C : 98~110			○	○	○	Groove A (E) : — Groove B (D) : 97~109 Groove C : 98~108		
	Rod side	○	○	○				○	○	○				○	○	○				○	○	○			
180	Head side	○	○	○				○	○	○	Groove A (E) : — Groove B (D) : 97~111 Groove C : 99~109			○	○	○	Groove A (E) : — Groove B (D) : 101~117 Groove C : 103~115			○	○	○	Groove A (E) : — Groove B (D) : 102~114 Groove C : 103~113		
	Rod side	○	○	○				○	○	○				○	○	○				○	○	○			
190	Head side	○	○	○				○	○	○	Groove A (E) : — Groove B (D) : 102~116 Groove C : 104~114			○	○	○	Groove A (E) : — Groove B (D) : 106~122 Groove C : 108~120			○	○	○	Groove A (E) : — Groove B (D) : 107~119 Groove C : 108~118		
	Rod side	○	○	○				○	○	○				○	○	○				○	○	○			
200	Head side	○	○	○				○	○	○	Groove A (E) : — Groove B (D) : 107~121 Groove C : 109~119			○	○	○	Groove A (E) : — Groove B (D) : 111~127 Groove C : 113~125			○	○	○	Groove A (E) : — Groove B (D) : 112~124 Groove C : 113~123		
	Rod side	○	○	○				○	○	○				○	○	○				○	○	○			

Note: The undetectable stroke range appears due to interference between the sensor switch and the body mounting bolts.

■ Moving sensor switch

- Loosening the mounting screw allows the sensor switch to be moved along the switch mounting groove of the cylinder body.
- Tighten the mounting screw with a tightening torque of 0.1~0.2N·m [0.9~1.8in·lbf].

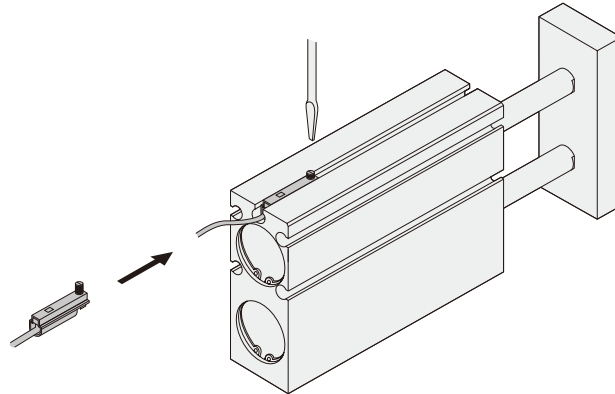

● Reed switch type

○ : Mountable △ : Either head side or rod side × : Unmountable — : Fully detectable within stroke (mm)


Bore size	Mounting groove	φ 10				φ 16				φ 20				φ 25				φ 32			
		A	B	C	Undetectable stroke range of sensor switch	A	B	C	Undetectable stroke range of sensor switch	A	B	C	Undetectable stroke range of sensor switch	A	B	C	Undetectable stroke range of sensor switch				
Stroke		E	D			E	D			E	D			E	D			E	D		
10	Head side	△	△	△	Groove A (E) : — Groove B (D) : 5~10 Groove C : 6~10	△	×	△	Groove A (E) : — Groove B (D) : 8~10 Groove C : —	△	○	△	Groove A (E) : — Groove B (D) : 8~10 Groove C : 10	△	○	△	Groove A (E) : — Groove B (D), C : —	△	△	△	Groove A (E) : — Groove B (D) : 9~10 Groove C : —
	Rod side	○	○	○		○	×	△		△	×	×		○	×	△		○	×	△	
20	Head side	○	○	○	Groove A (E) : — Groove B (D) : 15~20 Groove C : 16~20	○	○	○	Groove A (E) : — Groove B (D) : 15~20 Groove C : 17~20	○	○	○	Groove A (E) : — Groove B (D) : 18~20 Groove C : —	○	○	○	Groove A (E) : — Groove B (D), C : —	○	○	△	Groove A (E) : — Groove B (D) : 19~20 Groove C : —
	Rod side	○	×	×		○	×	×		○	×	△		○	×	×		○	×	△	
30	Head side	○	○	○	Groove A (E) : — Groove B (D) : 19~30 Groove C : 20~30	○	○	○	Groove A (E) : — Groove B (D) : 20~30 Groove C : 22~30	○	○	○	Groove A (E) : — Groove B (D) : 24~30 Groove C : 26~30	○	○	○	Groove A (E) : — Groove B (D), C : 26~30	○	○	○	Groove A (E) : — Groove B (D) : 27~30 Groove C : 28~30
	Rod side	○	×	×		○	×	×		○	×	×		○	×	×		○	×	×	
40	Head side	○	○	○	Groove A (E) : — Groove B (D) : 25~40 Groove C : 26~40	○	○	○	Groove A (E) : — Groove B (D) : 25~40 Groove C : 27~40	○	○	○	Groove A (E) : — Groove B (D) : 29~40 Groove C : 31~40	○	○	○	Groove A (E) : — Groove B (D), C : 31~40	○	○	×	Groove A (E) : — Groove B (D) : 32~40 Groove C : 33~40
	Rod side	○	×	×		○	×	×		○	×	×		○	×	×		○	×	×	
50	Head side	○	○	○	Groove A (E) : — Groove B (D) : 30~47 Groove C : 31~46	○	○	○	Groove A (E) : — Groove B (D) : 30~49 Groove C : 32~47	○	○	○	Groove A (E) : — Groove B (D) : 34~50 Groove C : 36~50	○	○	○	Groove A (E) : — Groove B (D), C : 36~50	○	○	○	Groove A (E) : — Groove B (D) : 37~49 Groove C : 38~48
	Rod side	○	○	○		○	○	○		○	×	×		○	×	×		○	×	○	
60	Head side	○	○	○	Groove A (E) : — Groove B (D) : 35~52 Groove C : 36~51	○	○	○	Groove A (E) : — Groove B (D) : 35~54 Groove C : 37~52	○	○	○	Groove A (E) : — Groove B (D) : 39~59 Groove C : 41~57	○	○	○	Groove A (E) : — Groove B (D), C : 41~56	○	○	○	Groove A (E) : — Groove B (D) : 42~54 Groove C : 43~53
	Rod side	○	○	○		○	○	○		○	○	○		○	○	○		○	○	○	
70	Head side	○	○	○	Groove A (E) : — Groove B (D) : 40~57 Groove C : 41~56	○	○	○	Groove A (E) : — Groove B (D) : 40~59 Groove C : 42~57	○	○	○	Groove A (E) : — Groove B (D) : 44~64 Groove C : 46~62	○	○	○	Groove A (E) : — Groove B (D), C : 46~61	○	○	○	Groove A (E) : — Groove B (D) : 47~59 Groove C : 48~58
	Rod side	○	○	○		○	○	○		○	○	○		○	○	○		○	○	○	
80	Head side	○	○	○	Groove A (E) : — Groove B (D) : 45~62 Groove C : 46~61	○	○	○	Groove A (E) : — Groove B (D) : 45~64 Groove C : 47~62	○	○	○	Groove A (E) : — Groove B (D) : 49~69 Groove C : 51~67	○	○	○	Groove A (E) : — Groove B (D), C : 51~66	○	○	○	Groove A (E) : — Groove B (D) : 52~64 Groove C : 53~63
	Rod side	○	○	○		○	○	○		○	○	○		○	○	○		○	○	○	
90	Head side	○	○	○	Groove A (E) : — Groove B (D) : 50~67 Groove C : 51~66	○	○	○	Groove A (E) : — Groove B (D) : 50~69 Groove C : 52~67	○	○	○	Groove A (E) : — Groove B (D) : 54~74 Groove C : 56~72	○	○	○	Groove A (E) : — Groove B (D), C : 56~71	○	○	○	Groove A (E) : — Groove B (D) : 57~69 Groove C : 58~68
	Rod side	○	○	○		○	○	○		○	○	○		○	○	○		○	○	○	
100	Head side	○	○	○	Groove A (E) : — Groove B (D) : 55~72 Groove C : 56~71	○	○	○	Groove A (E) : — Groove B (D) : 55~74 Groove C : 57~72	○	○	○	Groove A (E) : — Groove B (D) : 59~79 Groove C : 61~77	○	○	○	Groove A (E) : — Groove B (D), C : 61~76	○	○	○	Groove A (E) : — Groove B (D) : 62~74 Groove C : 63~73
	Rod side	○	○	○		○	○	○		○	○	○		○	○	○		○	○	○	
110	Head side	○	○	○	Groove A (E) : — Groove B (D) : 60~77 Groove C : 61~76	○	○	○	Groove A (E) : — Groove B (D) : 60~79 Groove C : 62~77	○	○	○	Groove A (E) : — Groove B (D) : 64~84 Groove C : 66~82	○	○	○	Groove A (E) : — Groove B (D), C : 66~81	○	○	○	Groove A (E) : — Groove B (D) : 67~79 Groove C : 68~78
	Rod side	○	○	○		○	○	○		○	○	○		○	○	○		○	○	○	
120	Head side	○	○	○	Groove A (E) : — Groove B (D) : 65~82 Groove C : 66~81	○	○	○	Groove A (E) : — Groove B (D) : 65~84 Groove C : 67~82	○	○	○	Groove A (E) : — Groove B (D) : 69~89 Groove C : 71~87	○	○	○	Groove A (E) : — Groove B (D), C : 71~86	○	○	○	Groove A (E) : — Groove B (D) : 72~84 Groove C : 73~83
	Rod side	○	○	○		○	○	○		○	○	○		○	○	○		○	○	○	
130	Head side	○	○	○	Groove A (E) : — Groove B (D) : 70~87 Groove C : 71~86	○	○	○	Groove A (E) : — Groove B (D) : 70~89 Groove C : 72~87	○	○	○	Groove A (E) : — Groove B (D) : 74~94 Groove C : 76~92	○	○	○	Groove A (E) : — Groove B (D), C : 76~91	○	○	○	Groove A (E) : — Groove B (D) : 77~89 Groove C : 78~88
	Rod side	○	○	○		○	○	○		○	○	○		○	○	○		○	○	○	
140	Head side	○	○	○	Groove A (E) : — Groove B (D) : 75~92 Groove C : 76~91	○	○	○	Groove A (E) : — Groove B (D) : 75~94 Groove C : 77~92	○	○	○	Groove A (E) : — Groove B (D) : 79~99 Groove C : 81~97	○	○	○	Groove A (E) : — Groove B (D), C : 81~96	○	○	○	Groove A (E) : — Groove B (D) : 82~94 Groove C : 83~93
	Rod side	○	○	○		○	○	○		○	○	○		○	○	○		○	○	○	
150	Head side					○	○	○	Groove A (E) : — Groove B (D) : 80~99 Groove C : 82~97	○	○	○	Groove A (E) : — Groove B (D) : 84~104 Groove C : 86~102	○	○	○	Groove A (E) : — Groove B (D), C : 86~101	○	○	○	Groove A (E) : — Groove B (D) : 87~99 Groove C : 88~98
	Rod side					○	○	○		○	○	○		○	○	○		○	○	○	
160	Head side					○	○	○	Groove A (E) : — Groove B (D) : 85~104 Groove C : 87~102	○	○	○	Groove A (E) : — Groove B (D) : 89~109 Groove C : 91~107	○	○	○	Groove A (E) : — Groove B (D), C : 91~106	○	○	○	Groove A (E) : — Groove B (D) : 92~104 Groove C : 93~103
	Rod side					○	○	○		○	○	○		○	○	○		○	○	○	
170	Head side					○	○	○	Groove A (E) : — Groove B (D) : 90~109 Groove C : 92~107	○	○	○	Groove A (E) : — Groove B (D) : 94~114 Groove C : 96~112	○	○	○	Groove A (E) : — Groove B (D), C : 96~111	○	○	○	Groove A (E) : — Groove B (D) : 97~109 Groove C : 98~108
	Rod side					○	○	○		○	○	○		○	○	○		○	○	○	
180	Head side					○	○	○	Groove A (E) : — Groove B (D) : 95~114 Groove C : 97~112	○	○	○	Groove A (E) : — Groove B (D) : 99~119 Groove C : 101~117	○	○	○	Groove A (E) : — Groove B (D), C : 101~116	○	○	○	Groove A (E) : — Groove B (D) : 102~114 Groove C : 103~113
	Rod side					○	○	○		○	○	○		○	○	○		○	○	○	
190	Head side					○	○	○	Groove A (E) : — Groove B (D) : 100~119 Groove C : 102~117	○	○	○	Groove A (E) : — Groove B (D) : 104~124 Groove C : 106~122	○	○	○	Groove A (E) : — Groove B (D), C : 106~121	○	○	○	Groove A (E) : — Groove B (D) : 107~119 Groove C : 108~118
	Rod side					○	○	○		○	○	○		○	○	○		○	○	○	
200	Head side					○	○	○	Groove A (E) : — Groove B (D) : 105~124 Groove C : 107~122	○	○	○	Groove A (E) : — Groove B (D) : 109~129 Groove C : 111~127	○	○	○	Groove A (E) : — Groove B (D), C : 111~126	○	○	○	Groove A (E) : — Groove B (D) : 112~124 Groove C : 113~123
	Rod side					○	○	○		○	○	○		○	○	○		○	○	○	

Note: The undetectable stroke range appears due to interference between the sensor switch and the body mounting bolts.

Mountable or Unmountable Sensor Switch and Undetectable Stroke Range at End of Stroke


Head side end keep cylinder (TBD-DAK-HL)

In the case of using 4 mounting holes on the body

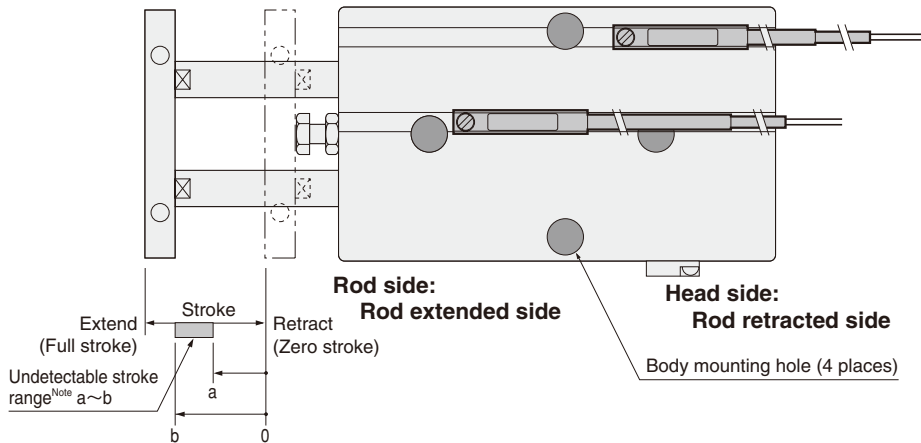

Note: The undetectable stroke range is the value measured from the zero stroke with 1 sensor switch installation.

● Sensor switch mounting surface



Mounting a sensor switch in any of the grooves A~E allows detection at either the head side or rod side stroke end, and intermediate positions. The diagram shows the rod side with the square plate removed.

Caution

When mounting a sensor switch in the A or E groove's rod extended side (the rod side of the body), ensure that the sensor switch is installed inside the groove between body mounting holes before tightening body mounting bolts, to avoid interference between the sensor switch and the bolts.

This procedure is not necessary for $\phi 25$ [0.984in.], however, where no interference occurs.

● Solid state type


○ : Mountable △ : Either head side or rod side × : Unmountable — : Fully detectable within stroke (mm)

Bore size	Mounting groove	A	B	C	$\phi 16$	A	B	C	$\phi 20$	A	B	C	$\phi 25$
Stroke		E	D		Undetectable stroke range of sensor switch	E	D		Undetectable stroke range of sensor switch	E	D		Undetectable stroke range of sensor switch
10	Head side	△	○	○	Groove A (E) : 0~10 Groove B (D) : 2~10 Groove C : 4~10	△	○	○	Groove A (E) : 2~10 Groove B (D) : 6~10 Groove C : 8~10	○	○	○	Groove A (E) : — Groove B (D), C : 7~10
	Rod side	△	×	×		△	×	×		○	×	×	
20	Head side	△	○	○	Groove A (E) : 0~12 Groove B (D) : 7~20 Groove C : 9~20	△	○	○	Groove A (E) : 2~15 Groove B (D) : 11~20 Groove C : 13~20	○	○	○	Groove A (E) : — Groove B (D), C : 12~20
	Rod side	△	×	×		△	×	×		○	×	×	
30	Head side	○	○	○	Groove A (E) : 0~12 Groove B (D) : 12~26 Groove C : 14~24	○	○	○	Groove A (E) : 2~15 Groove B (D) : 16~30 Groove C : 18~30	○	○	○	Groove A (E) : — Groove B (D), C : 17~29
	Rod side	○	○	○		○	×	×		○	○	○	
40	Head side	○	○	○	Groove A (E) : 0~12 Groove B (D) : 17~31 Groove C : 19~29	○	○	○	Groove A (E) : 2~15 Groove B (D) : 21~37 Groove C : 23~35	○	○	○	Groove A (E) : — Groove B (D), C : 22~34
	Rod side	○	○	○		○	○	○		○	○	○	
50	Head side	○	○	○	Groove A (E) : 0~12 Groove B (D) : 22~36 Groove C : 24~34	○	○	○	Groove A (E) : 2~15 Groove B (D) : 26~42 Groove C : 28~40	○	○	○	Groove A (E) : — Groove B (D), C : 27~39
	Rod side	○	○	○		○	○	○		○	○	○	
60	Head side	○	○	○	Groove A (E) : 0~12 Groove B (D) : 27~41 Groove C : 29~39	○	○	○	Groove A (E) : 2~15 Groove B (D) : 31~47 Groove C : 33~45	○	○	○	Groove A (E) : — Groove B (D), C : 32~44
	Rod side	○	○	○		○	○	○		○	○	○	
70	Head side	○	○	○	Groove A (E) : 0~12 Groove B (D) : 32~46 Groove C : 34~44	○	○	○	Groove A (E) : 2~15 Groove B (D) : 36~52 Groove C : 38~50	○	○	○	Groove A (E) : — Groove B (D), C : 37~49
	Rod side	○	○	○		○	○	○		○	○	○	
80	Head side	○	○	○	Groove A (E) : 0~12 Groove B (D) : 37~51 Groove C : 39~49	○	○	○	Groove A (E) : 2~15 Groove B (D) : 41~57 Groove C : 43~55	○	○	○	Groove A (E) : — Groove B (D), C : 42~54
	Rod side	○	○	○		○	○	○		○	○	○	
90	Head side	○	○	○	Groove A (E) : 0~12 Groove B (D) : 42~56 Groove C : 44~54	○	○	○	Groove A (E) : 2~15 Groove B (D) : 46~62 Groove C : 48~60	○	○	○	Groove A (E) : — Groove B (D), C : 47~59
	Rod side	○	○	○		○	○	○		○	○	○	
100	Head side	○	○	○	Groove A (E) : 0~12 Groove B (D) : 47~61 Groove C : 49~59	○	○	○	Groove A (E) : 2~15 Groove B (D) : 51~67 Groove C : 53~65	○	○	○	Groove A (E) : — Groove B (D), C : 52~64
	Rod side	○	○	○		○	○	○		○	○	○	
110	Head side	○	○	○	Groove A (E) : 0~12 Groove B (D) : 52~66 Groove C : 54~64	○	○	○	Groove A (E) : 2~15 Groove B (D) : 56~72 Groove C : 58~70	○	○	○	Groove A (E) : — Groove B (D), C : 57~69
	Rod side	○	○	○		○	○	○		○	○	○	
120	Head side	○	○	○	Groove A (E) : 0~12 Groove B (D) : 57~71 Groove C : 59~69	○	○	○	Groove A (E) : 2~15 Groove B (D) : 61~77 Groove C : 63~75	○	○	○	Groove A (E) : — Groove B (D), C : 62~74
	Rod side	○	○	○		○	○	○		○	○	○	
130	Head side	○	○	○	Groove A (E) : 0~12 Groove B (D) : 62~76 Groove C : 64~74	○	○	○	Groove A (E) : 2~15 Groove B (D) : 66~82 Groove C : 68~80	○	○	○	Groove A (E) : — Groove B (D), C : 67~79
	Rod side	○	○	○		○	○	○		○	○	○	
140	Head side	○	○	○	Groove A (E) : 0~12 Groove B (D) : 67~81 Groove C : 69~79	○	○	○	Groove A (E) : 2~15 Groove B (D) : 71~87 Groove C : 73~85	○	○	○	Groove A (E) : — Groove B (D), C : 72~84
	Rod side	○	○	○		○	○	○		○	○	○	
150	Head side	○	○	○	Groove A (E) : 0~12 Groove B (D) : 72~86 Groove C : 74~84	○	○	○	Groove A (E) : 2~15 Groove B (D) : 76~92 Groove C : 78~90	○	○	○	Groove A (E) : — Groove B (D), C : 77~89
	Rod side	○	○	○		○	○	○		○	○	○	
160	Head side	○	○	○	Groove A (E) : 0~12 Groove B (D) : 77~91 Groove C : 79~89	○	○	○	Groove A (E) : 2~15 Groove B (D) : 81~97 Groove C : 83~95	○	○	○	Groove A (E) : — Groove B (D), C : 82~94
	Rod side	○	○	○		○	○	○		○	○	○	

Note: The undetectable stroke range appears due to interference between the sensor switch and the body mounting bolts.

■ Moving sensor switch

- Loosening the mounting screw allows the sensor switch to be moved along the switch mounting groove of the cylinder body.
- Tighten the mounting screw with a tightening torque of 0.1~0.2N·m [0.9~1.8in·lbf].

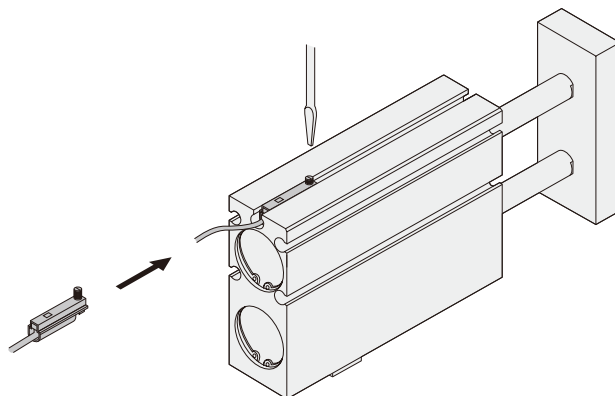

● Reed switch type

○ : Mountable △ : Either head side or rod side × : Unmountable — : Fully detectable within stroke (mm)


Bore size		φ 16				φ 20				φ 25			
Stroke	Mounting groove	A	B	C	Undetectable stroke range of sensor switch	A	B	C	Undetectable stroke range of sensor switch	A	B	C	Undetectable stroke range of sensor switch
		E	D			E	D			E	D		
10	Head side	△	×	○	Groove A (E) : 0~10 Groove B (D) : 2~10 Groove C : —	△	○	○	Groove A (E) : 0~10 Groove B (D) : 4~10 Groove C : 6~10	△	○	○	Groove A (E) : — Groove B (D), C : 6~10
	Rod side	△	×	×		△	×	×		△	×	×	
20	Head side	○	○	○	Groove A (E) : 0~14 Groove B (D) : 5~20 Groove C : 7~20	○	○	○	Groove A (E) : 0~17 Groove B (D) : 9~20 Groove C : 11~20	○	○	○	Groove A (E) : — Groove B (D), C : 11~20
	Rod side	○	×	×		○	×	×		○	×	×	
30	Head side	○	○	○	Groove A (E) : 0~14 Groove B (D) : 10~29 Groove C : 12~27	○	○	○	Groove A (E) : 0~17 Groove B (D) : 14~30 Groove C : 16~30	○	○	○	Groove A (E) : — Groove B (D), C : 16~30
	Rod side	○	○	○		○	×	×		○	×	×	
40	Head side	○	○	○	Groove A (E) : 0~14 Groove B (D) : 15~34 Groove C : 17~32	○	○	○	Groove A (E) : 0~17 Groove B (D) : 19~39 Groove C : 21~37	○	○	○	Groove A (E) : — Groove B (D), C : 21~36
	Rod side	○	○	○		○	○	○		○	○	○	
50	Head side	○	○	○	Groove A (E) : 0~14 Groove B (D) : 20~39 Groove C : 22~37	○	○	○	Groove A (E) : 0~17 Groove B (D) : 24~44 Groove C : 26~42	○	○	○	Groove A (E) : — Groove B (D), C : 26~41
	Rod side	○	○	○		○	○	○		○	○	○	
60	Head side	○	○	○	Groove A (E) : 0~14 Groove B (D) : 25~44 Groove C : 27~42	○	○	○	Groove A (E) : 0~17 Groove B (D) : 29~49 Groove C : 31~47	○	○	○	Groove A (E) : — Groove B (D), C : 31~46
	Rod side	○	○	○		○	○	○		○	○	○	
70	Head side	○	○	○	Groove A (E) : 0~14 Groove B (D) : 30~49 Groove C : 32~47	○	○	○	Groove A (E) : 0~17 Groove B (D) : 34~54 Groove C : 36~52	○	○	○	Groove A (E) : — Groove B (D), C : 36~51
	Rod side	○	○	○		○	○	○		○	○	○	
80	Head side	○	○	○	Groove A (E) : 0~14 Groove B (D) : 35~54 Groove C : 37~52	○	○	○	Groove A (E) : 0~17 Groove B (D) : 39~59 Groove C : 41~57	○	○	○	Groove A (E) : — Groove B (D), C : 41~56
	Rod side	○	○	○		○	○	○		○	○	○	
90	Head side	○	○	○	Groove A (E) : 0~14 Groove B (D) : 40~59 Groove C : 42~57	○	○	○	Groove A (E) : 0~17 Groove B (D) : 44~64 Groove C : 46~62	○	○	○	Groove A (E) : — Groove B (D), C : 46~61
	Rod side	○	○	○		○	○	○		○	○	○	
100	Head side	○	○	○	Groove A (E) : 0~14 Groove B (D) : 45~64 Groove C : 47~62	○	○	○	Groove A (E) : 0~17 Groove B (D) : 49~69 Groove C : 51~67	○	○	○	Groove A (E) : — Groove B (D), C : 51~66
	Rod side	○	○	○		○	○	○		○	○	○	
110	Head side	○	○	○	Groove A (E) : 0~14 Groove B (D) : 50~69 Groove C : 52~67	○	○	○	Groove A (E) : 0~17 Groove B (D) : 54~74 Groove C : 56~72	○	○	○	Groove A (E) : — Groove B (D), C : 56~71
	Rod side	○	○	○		○	○	○		○	○	○	
120	Head side	○	○	○	Groove A (E) : 0~14 Groove B (D) : 55~74 Groove C : 57~72	○	○	○	Groove A (E) : 0~17 Groove B (D) : 59~79 Groove C : 61~77	○	○	○	Groove A (E) : — Groove B (D), C : 61~76
	Rod side	○	○	○		○	○	○		○	○	○	
130	Head side	○	○	○	Groove A (E) : 0~14 Groove B (D) : 60~79 Groove C : 62~77	○	○	○	Groove A (E) : 0~17 Groove B (D) : 64~84 Groove C : 66~82	○	○	○	Groove A (E) : — Groove B (D), C : 66~81
	Rod side	○	○	○		○	○	○		○	○	○	
140	Head side	○	○	○	Groove A (E) : 0~14 Groove B (D) : 65~84 Groove C : 67~82	○	○	○	Groove A (E) : 0~17 Groove B (D) : 69~89 Groove C : 71~87	○	○	○	Groove A (E) : — Groove B (D), C : 71~86
	Rod side	○	○	○		○	○	○		○	○	○	
150	Head side	○	○	○	Groove A (E) : 0~14 Groove B (D) : 70~89 Groove C : 72~87	○	○	○	Groove A (E) : 0~17 Groove B (D) : 74~94 Groove C : 76~92	○	○	○	Groove A (E) : — Groove B (D), C : 76~91
	Rod side	○	○	○		○	○	○		○	○	○	
160	Head side	○	○	○	Groove A (E) : 0~14 Groove B (D) : 75~94 Groove C : 77~92	○	○	○	Groove A (E) : 0~17 Groove B (D) : 79~99 Groove C : 81~97	○	○	○	Groove A (E) : — Groove B (D), C : 81~96
	Rod side	○	○	○		○	○	○		○	○	○	

Note: The undetectable stroke range appears due to interference between the sensor switch and the body mounting bolts.

Mountable or Unmountable Sensor Switch and Undetectable Stroke Range at End of Stroke


Head side end keep cylinder (TBD-DAK-HL)

■ In the case of using 2 center mounting holes on the body

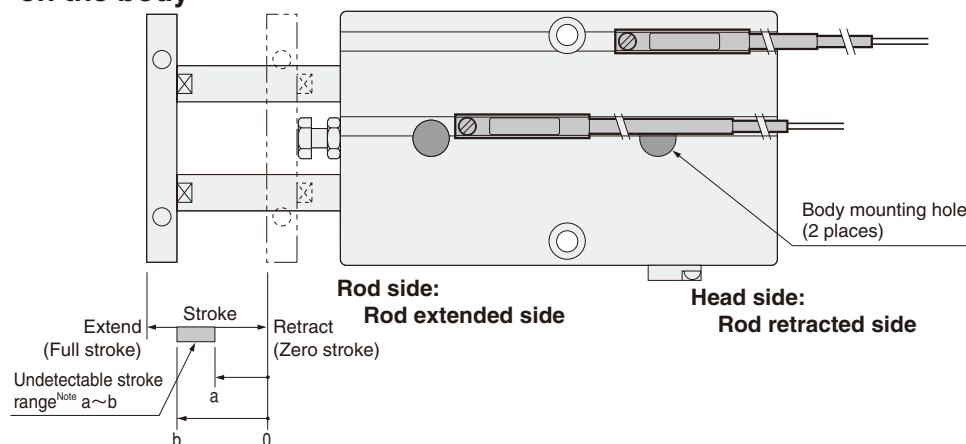

Note: The undetectable stroke range is the value measured from the zero stroke with 1 sensor switch installation.

● Sensor switch mounting surface C



Mounting a sensor switch in any of the grooves A~E allows detection at either the head side or rod side stroke end, and intermediate positions. The diagram shows the rod side with the square plate removed.

Caution

When mounting a sensor switch in the A or E groove's rod extended side (the rod side of the body), ensure that the sensor switch is installed inside the groove between body mounting holes before tightening body mounting bolts, to avoid interference between the sensor switch and the bolts.

This procedure is not necessary for $\phi 25$ [0.984in.], however, where no interference occurs.

● Solid state type


○ : Mountable △ : Either head side or rod side × : Unmountable — : Fully detectable within stroke (mm)

Bore size		$\phi 16$			$\phi 20$			$\phi 25$		
Stroke	Mounting groove	A	B	C	A	B	C	A	B	C
		E	D		E	D		E	D	
10	Head side	△	○	○	△	○	○	○	○	○
	Rod side	△	○	○	△	○	○	○	○	○
20	Head side	△	○	○	△	○	○	○	○	○
	Rod side	△	○	○	△	○	○	○	○	○
30	Head side	○	○	○	○	○	○	○	○	○
	Rod side	○	○	○	○	○	○	○	○	○
40	Head side	○	○	○	○	○	○	○	○	○
	Rod side	○	○	○	○	○	○	○	○	○
50	Head side	○	○	○	○	○	○	○	○	○
	Rod side	○	○	○	○	○	○	○	○	○
60	Head side	○	○	○	○	○	○	○	○	○
	Rod side	○	○	○	○	○	○	○	○	○
70	Head side	○	○	○	○	○	○	○	○	○
	Rod side	○	○	○	○	○	○	○	○	○
80	Head side	○	○	○	○	○	○	○	○	○
	Rod side	○	○	○	○	○	○	○	○	○
90	Head side	○	○	○	○	○	○	○	○	○
	Rod side	○	○	○	○	○	○	○	○	○
100	Head side	○	○	○	○	○	○	○	○	○
	Rod side	○	○	○	○	○	○	○	○	○
110	Head side	○	○	○	○	○	○	○	○	○
	Rod side	○	○	○	○	○	○	○	○	○
120	Head side	○	○	○	○	○	○	○	○	○
	Rod side	○	○	○	○	○	○	○	○	○
130	Head side	○	○	○	○	○	○	○	○	○
	Rod side	○	○	○	○	○	○	○	○	○
140	Head side	○	○	○	○	○	○	○	○	○
	Rod side	○	○	○	○	○	○	○	○	○
150	Head side	○	○	○	○	○	○	○	○	○
	Rod side	○	○	○	○	○	○	○	○	○
160	Head side	○	○	○	○	○	○	○	○	○
	Rod side	○	○	○	○	○	○	○	○	○

Note: The undetectable stroke range appears due to interference between the sensor switch and the body mounting bolts.

■ Moving sensor switch

- Loosening the mounting screw allows the sensor switch to be moved along the switch mounting groove of the cylinder body.
- Tighten the mounting screw with a tightening torque of 0.1~0.2N·m [0.9~1.8in·lbf].

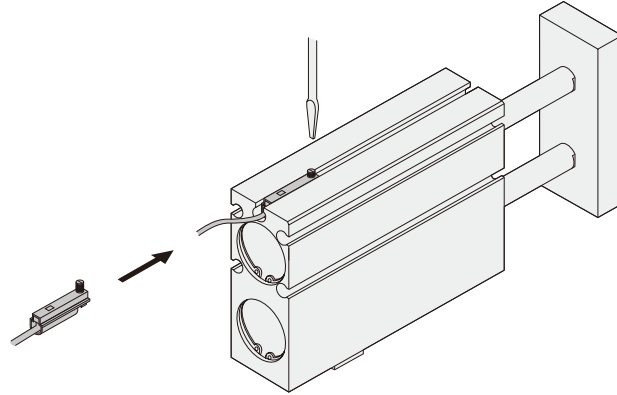

● Reed switch type

○ : Mountable △ : Either head side or rod side × : Unmountable — : Fully detectable within stroke (mm)


Bore size		φ 16				φ 20				φ 25			
Stroke	Mounting groove	A	B	C	Undetectable stroke range of sensor switch	A	B	C	Undetectable stroke range of sensor switch	A	B	C	Undetectable stroke range of sensor switch
		E	D			E	D			E	D		
10	Head side	△	△	△	Groove A (E) : 0~10 Groove B (D), C : —	△	△	△	Groove A (E) : 0~10 Groove B (D), C : —	△	△	△	Groove A (E) : — Groove B (D), C : —
	Rod side	△	△	△		△	△	△		△	△	△	
20	Head side	○	○	○	Groove A (E) : 0~14 Groove B (D), C : —	○	○	○	Groove A (E) : 0~17 Groove B (D), C : —	○	○	○	Groove A (E) : — Groove B (D), C : —
	Rod side	○	○	○		○	○	○		○	○	○	
30	Head side	○	○	○	Groove A (E) : 0~14 Groove B (D), C : —	○	○	○	Groove A (E) : 0~17 Groove B (D), C : —	○	○	○	Groove A (E) : — Groove B (D), C : —
	Rod side	○	○	○		○	○	○		○	○	○	
40	Head side	○	○	○	Groove A (E) : 0~14 Groove B (D), C : —	○	○	○	Groove A (E) : 0~17 Groove B (D), C : —	○	○	○	Groove A (E) : — Groove B (D), C : —
	Rod side	○	○	○		○	○	○		○	○	○	
50	Head side	○	○	○	Groove A (E) : 0~14 Groove B (D), C : —	○	○	○	Groove A (E) : 0~17 Groove B (D), C : —	○	○	○	Groove A (E) : — Groove B (D), C : —
	Rod side	○	○	○		○	○	○		○	○	○	
60	Head side	○	○	○	Groove A (E) : 0~14 Groove B (D), C : —	○	○	○	Groove A (E) : 0~17 Groove B (D), C : —	○	○	○	Groove A (E) : — Groove B (D), C : —
	Rod side	○	○	○		○	○	○		○	○	○	
70	Head side	○	○	○	Groove A (E) : 0~14 Groove B (D), C : —	○	○	○	Groove A (E) : 0~17 Groove B (D), C : —	○	○	○	Groove A (E) : — Groove B (D), C : —
	Rod side	○	○	○		○	○	○		○	○	○	
80	Head side	○	○	○	Groove A (E) : 0~14 Groove B (D), C : —	○	○	○	Groove A (E) : 0~17 Groove B (D), C : —	○	○	○	Groove A (E) : — Groove B (D), C : —
	Rod side	○	○	○		○	○	○		○	○	○	
90	Head side	○	○	○	Groove A (E) : 0~14 Groove B (D), C : —	○	○	○	Groove A (E) : 0~17 Groove B (D), C : —	○	○	○	Groove A (E) : — Groove B (D), C : —
	Rod side	○	○	○		○	○	○		○	○	○	
100	Head side	○	○	○	Groove A (E) : 0~14 Groove B (D), C : —	○	○	○	Groove A (E) : 0~17 Groove B (D), C : —	○	○	○	Groove A (E) : — Groove B (D), C : —
	Rod side	○	○	○		○	○	○		○	○	○	
110	Head side	○	○	○	Groove A (E) : 0~14 Groove B (D), C : —	○	○	○	Groove A (E) : 0~17 Groove B (D), C : —	○	○	○	Groove A (E) : — Groove B (D), C : —
	Rod side	○	○	○		○	○	○		○	○	○	
120	Head side	○	○	○	Groove A (E) : 0~14 Groove B (D), C : —	○	○	○	Groove A (E) : 0~17 Groove B (D), C : —	○	○	○	Groove A (E) : — Groove B (D), C : —
	Rod side	○	○	○		○	○	○		○	○	○	
130	Head side	○	○	○	Groove A (E) : 0~14 Groove B (D), C : —	○	○	○	Groove A (E) : 0~17 Groove B (D), C : —	○	○	○	Groove A (E) : — Groove B (D), C : —
	Rod side	○	○	○		○	○	○		○	○	○	
140	Head side	○	○	○	Groove A (E) : 0~14 Groove B (D), C : —	○	○	○	Groove A (E) : 0~17 Groove B (D), C : —	○	○	○	Groove A (E) : — Groove B (D), C : —
	Rod side	○	○	○		○	○	○		○	○	○	
150	Head side	○	○	○	Groove A (E) : 0~14 Groove B (D), C : —	○	○	○	Groove A (E) : 0~17 Groove B (D), C : —	○	○	○	Groove A (E) : — Groove B (D), C : —
	Rod side	○	○	○		○	○	○		○	○	○	
160	Head side	○	○	○	Groove A (E) : 0~14 Groove B (D), C : —	○	○	○	Groove A (E) : 0~17 Groove B (D), C : —	○	○	○	Groove A (E) : — Groove B (D), C : —
	Rod side	○	○	○		○	○	○		○	○	○	

Note: The undetectable stroke range appears due to interference between the sensor switch and the body mounting bolts.


Mountable or Unmountable Sensor Switch and Undetectable Stroke Range at End of Stroke

Head side end keep cylinder (TBDAK-HL)

■ In the case of using 2 mounting holes on the body
(one on each side)

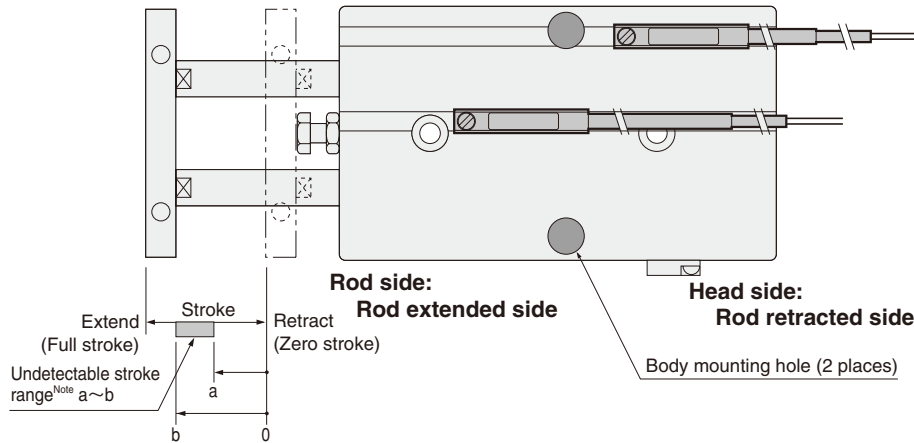

● Sensor switch mounting surface



Mounting a sensor switch in any of the grooves A~E allows detection at either the head side or rod side stroke end, and intermediate positions. The diagram shows the rod side with the square plate removed.

Note: The undetectable stroke range is the value measured from the zero stroke with 1 sensor switch installation.

● Solid state type


○ : Mountable △ : Either head side or rod side × : Unmountable — : Fully detectable within stroke (mm)

Bore size		φ 16			φ 20			φ 25		
Stroke	Mounting groove	A	B	C	A	B	C	A	B	C
		E	D		E	D		E	D	
10	Head side	○	○	○	△	○	○	○	○	○
	Rod side	○	×	×	△	×	×	○	×	×
		Undetectable stroke range of sensor switch			Undetectable stroke range of sensor switch			Undetectable stroke range of sensor switch		
20	Head side	○	○	○	○	○	○	○	○	○
	Rod side	○	×	×	○	×	×	○	×	×
		Groove A (E) : — Groove B (D) : 2~10 Groove C : 4~10			Groove A (E) : — Groove B (D) : 6~10 Groove C : 8~10			Groove A (E) : — Groove B (D), C : 7~10		
30	Head side	○	○	○	○	○	○	○	○	○
	Rod side	○	○	○	○	×	×	○	×	×
		Groove A (E) : — Groove B (D) : 7~20 Groove C : 9~20			Groove A (E) : — Groove B (D) : 11~20 Groove C : 13~20			Groove A (E) : — Groove B (D), C : 12~20		
40	Head side	○	○	○	○	○	○	○	○	○
	Rod side	○	○	○	○	×	×	○	○	○
		Groove A (E) : — Groove B (D) : 12~26 Groove C : 14~24			Groove A (E) : — Groove B (D) : 16~30 Groove C : 18~30			Groove A (E) : — Groove B (D), C : 17~29		
50	Head side	○	○	○	○	○	○	○	○	○
	Rod side	○	○	○	○	○	○	○	○	○
		Groove A (E) : — Groove B (D) : 17~31 Groove C : 19~29			Groove A (E) : — Groove B (D) : 21~37 Groove C : 28~35			Groove A (E) : — Groove B (D), C : 22~34		
60	Head side	○	○	○	○	○	○	○	○	○
	Rod side	○	○	○	○	○	○	○	○	○
		Groove A (E) : — Groove B (D) : 22~36 Groove C : 24~34			Groove A (E) : — Groove B (D) : 26~42 Groove C : 28~40			Groove A (E) : — Groove B (D), C : 27~39		
70	Head side	○	○	○	○	○	○	○	○	○
	Rod side	○	○	○	○	○	○	○	○	○
		Groove A (E) : — Groove B (D) : 27~41 Groove C : 29~39			Groove A (E) : — Groove B (D) : 31~47 Groove C : 33~45			Groove A (E) : — Groove B (D), C : 32~44		
80	Head side	○	○	○	○	○	○	○	○	○
	Rod side	○	○	○	○	○	○	○	○	○
		Groove A (E) : — Groove B (D) : 32~46 Groove C : 34~44			Groove A (E) : — Groove B (D) : 36~52 Groove C : 38~50			Groove A (E) : — Groove B (D), C : 37~49		
90	Head side	○	○	○	○	○	○	○	○	○
	Rod side	○	○	○	○	○	○	○	○	○
		Groove A (E) : — Groove B (D) : 37~51 Groove C : 39~49			Groove A (E) : — Groove B (D) : 41~57 Groove C : 43~55			Groove A (E) : — Groove B (D), C : 42~54		
100	Head side	○	○	○	○	○	○	○	○	○
	Rod side	○	○	○	○	○	○	○	○	○
		Groove A (E) : — Groove B (D) : 42~56 Groove C : 44~54			Groove A (E) : — Groove B (D) : 46~62 Groove C : 48~60			Groove A (E) : — Groove B (D), C : 47~59		
110	Head side	○	○	○	○	○	○	○	○	○
	Rod side	○	○	○	○	○	○	○	○	○
		Groove A (E) : — Groove B (D) : 47~61 Groove C : 49~59			Groove A (E) : — Groove B (D) : 51~67 Groove C : 53~65			Groove A (E) : — Groove B (D), C : 52~64		
120	Head side	○	○	○	○	○	○	○	○	○
	Rod side	○	○	○	○	○	○	○	○	○
		Groove A (E) : — Groove B (D) : 52~66 Groove C : 54~64			Groove A (E) : — Groove B (D) : 56~72 Groove C : 58~70			Groove A (E) : — Groove B (D), C : 57~69		
130	Head side	○	○	○	○	○	○	○	○	○
	Rod side	○	○	○	○	○	○	○	○	○
		Groove A (E) : — Groove B (D) : 57~71 Groove C : 59~69			Groove A (E) : — Groove B (D) : 61~77 Groove C : 63~75			Groove A (E) : — Groove B (D), C : 62~74		
140	Head side	○	○	○	○	○	○	○	○	○
	Rod side	○	○	○	○	○	○	○	○	○
		Groove A (E) : — Groove B (D) : 62~76 Groove C : 64~74			Groove A (E) : — Groove B (D) : 66~82 Groove C : 68~80			Groove A (E) : — Groove B (D), C : 67~79		
150	Head side	○	○	○	○	○	○	○	○	○
	Rod side	○	○	○	○	○	○	○	○	○
		Groove A (E) : — Groove B (D) : 67~81 Groove C : 69~79			Groove A (E) : — Groove B (D) : 71~87 Groove C : 73~85			Groove A (E) : — Groove B (D), C : 72~84		
160	Head side	○	○	○	○	○	○	○	○	○
	Rod side	○	○	○	○	○	○	○	○	○
		Groove A (E) : — Groove B (D) : 72~86 Groove C : 74~84			Groove A (E) : — Groove B (D) : 76~92 Groove C : 78~90			Groove A (E) : — Groove B (D), C : 77~89		
	Head side	○	○	○	○	○	○	○	○	○
	Rod side	○	○	○	○	○	○	○	○	○
		Groove A (E) : — Groove B (D) : 77~91 Groove C : 79~89			Groove A (E) : — Groove B (D) : 81~97 Groove C : 83~95			Groove A (E) : — Groove B (D), C : 82~94		

Note: The undetectable stroke range appears due to interference between the sensor switch and the body mounting bolts.

■ Moving sensor switch

- Loosening the mounting screw allows the sensor switch to be moved along the switch mounting groove of the cylinder body.
- Tighten the mounting screw with a tightening torque of 0.1~0.2N·m [0.9~1.8in·lbf].

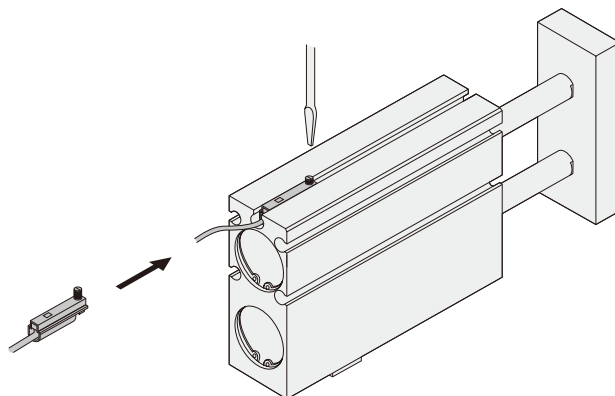

● Reed switch type

○ : Mountable △ : Either head side or rod side × : Unmountable — : Fully detectable within stroke (mm)


Bore size		φ 16				φ 20				φ 25			
Mounting groove		A	B	C	Undetectable stroke range of sensor switch	A	B	C	Undetectable stroke range of sensor switch	A	B	C	Undetectable stroke range of sensor switch
Stroke		E	D			E	D			E	D		
10	Head side	△	×	○	Groove A (E) : — Groove B (D) : 0~10 Groove C : 2~10	△	○	○	Groove A (E) : — Groove B (D) : 4~10 Groove C : 6~10	△	○	○	Groove A (E) : — Groove B (D), C : 6~10
	Rod side	△	×	×		△	×	×		△	×	×	
20	Head side	○	○	○	Groove A (E) : — Groove B (D) : 5~20 Groove C : 7~20	○	○	○	Groove A (E) : — Groove B (D) : 9~20 Groove C : 11~20	○	○	○	Groove A (E) : — Groove B (D), C : 11~20
	Rod side	○	×	×		○	×	×		○	×	×	
30	Head side	○	○	○	Groove A (E) : — Groove B (D) : 10~29 Groove C : 12~27	○	○	○	Groove A (E) : — Groove B (D) : 14~30 Groove C : 16~30	○	○	○	Groove A (E) : — Groove B (D), C : 16~30
	Rod side	○	○	○		○	×	×		○	×	×	
40	Head side	○	○	○	Groove A (E) : — Groove B (D) : 15~34 Groove C : 17~32	○	○	○	Groove A (E) : — Groove B (D) : 19~39 Groove C : 21~37	○	○	○	Groove A (E) : — Groove B (D), C : 21~36
	Rod side	○	○	○		○	○	○		○	○	○	
50	Head side	○	○	○	Groove A (E) : — Groove B (D) : 20~39 Groove C : 22~37	○	○	○	Groove A (E) : — Groove B (D) : 24~44 Groove C : 26~42	○	○	○	Groove A (E) : — Groove B (D), C : 26~41
	Rod side	○	○	○		○	○	○		○	○	○	
60	Head side	○	○	○	Groove A (E) : — Groove B (D) : 25~44 Groove C : 27~42	○	○	○	Groove A (E) : — Groove B (D) : 29~49 Groove C : 31~47	○	○	○	Groove A (E) : — Groove B (D), C : 31~46
	Rod side	○	○	○		○	○	○		○	○	○	
70	Head side	○	○	○	Groove A (E) : — Groove B (D) : 30~49 Groove C : 32~47	○	○	○	Groove A (E) : — Groove B (D) : 34~54 Groove C : 36~52	○	○	○	Groove A (E) : — Groove B (D), C : 36~51
	Rod side	○	○	○		○	○	○		○	○	○	
80	Head side	○	○	○	Groove A (E) : — Groove B (D) : 35~54 Groove C : 37~52	○	○	○	Groove A (E) : — Groove B (D) : 39~59 Groove C : 41~57	○	○	○	Groove A (E) : — Groove B (D), C : 41~56
	Rod side	○	○	○		○	○	○		○	○	○	
90	Head side	○	○	○	Groove A (E) : — Groove B (D) : 40~59 Groove C : 42~57	○	○	○	Groove A (E) : — Groove B (D) : 44~64 Groove C : 46~62	○	○	○	Groove A (E) : — Groove B (D), C : 46~61
	Rod side	○	○	○		○	○	○		○	○	○	
100	Head side	○	○	○	Groove A (E) : — Groove B (D) : 45~64 Groove C : 47~62	○	○	○	Groove A (E) : — Groove B (D) : 49~69 Groove C : 51~67	○	○	○	Groove A (E) : — Groove B (D), C : 51~66
	Rod side	○	○	○		○	○	○		○	○	○	
110	Head side	○	○	○	Groove A (E) : — Groove B (D) : 50~69 Groove C : 52~67	○	○	○	Groove A (E) : — Groove B (D) : 54~74 Groove C : 56~72	○	○	○	Groove A (E) : — Groove B (D), C : 56~71
	Rod side	○	○	○		○	○	○		○	○	○	
120	Head side	○	○	○	Groove A (E) : — Groove B (D) : 55~74 Groove C : 57~72	○	○	○	Groove A (E) : — Groove B (D) : 59~79 Groove C : 61~77	○	○	○	Groove A (E) : — Groove B (D), C : 61~76
	Rod side	○	○	○		○	○	○		○	○	○	
130	Head side	○	○	○	Groove A (E) : — Groove B (D) : 60~79 Groove C : 62~77	○	○	○	Groove A (E) : — Groove B (D) : 64~84 Groove C : 66~82	○	○	○	Groove A (E) : — Groove B (D), C : 66~81
	Rod side	○	○	○		○	○	○		○	○	○	
140	Head side	○	○	○	Groove A (E) : — Groove B (D) : 65~84 Groove C : 67~82	○	○	○	Groove A (E) : — Groove B (D) : 69~89 Groove C : 71~87	○	○	○	Groove A (E) : — Groove B (D), C : 71~86
	Rod side	○	○	○		○	○	○		○	○	○	
150	Head side	○	○	○	Groove A (E) : — Groove B (D) : 70~89 Groove C : 72~87	○	○	○	Groove A (E) : — Groove B (D) : 74~94 Groove C : 76~92	○	○	○	Groove A (E) : — Groove B (D), C : 76~91
	Rod side	○	○	○		○	○	○		○	○	○	
160	Head side	○	○	○	Groove A (E) : — Groove B (D) : 75~94 Groove C : 77~92	○	○	○	Groove A (E) : — Groove B (D) : 79~99 Groove C : 81~97	○	○	○	Groove A (E) : — Groove B (D), C : 81~96
	Rod side	○	○	○		○	○	○		○	○	○	

Note: The undetectable stroke range appears due to interference between the sensor switch and the body mounting bolts.


Mountable or Unmountable Sensor Switch and Undetectable Stroke Range at End of Stroke

Head side end keep cylinder (TBD AK-HL)

In the case of using 3 head side mounting holes on the body

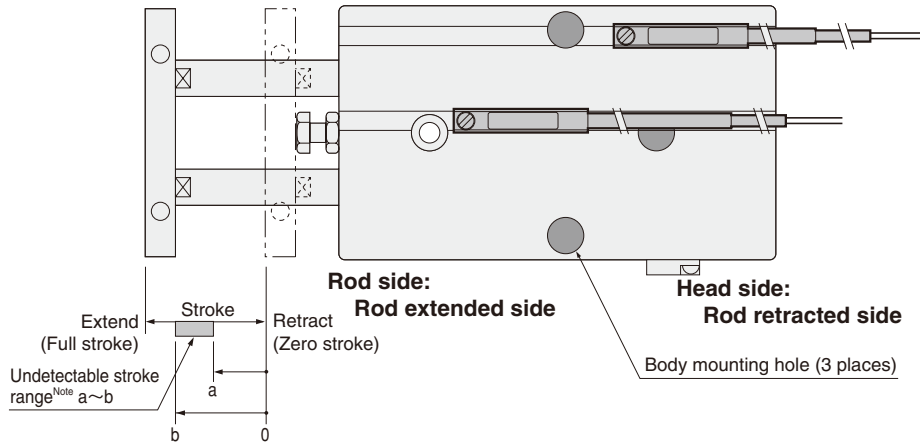

● Sensor switch mounting surface



Mounting a sensor switch in any of the grooves A~E allows detection at either the head side or rod side stroke end, and intermediate positions. The diagram shows the rod side with the square plate removed.

Note: The undetectable stroke range is the value measured from the zero stroke with 1 sensor switch installation.

● Solid state type


○ : Mountable △ : Either head side or rod side × : Unmountable — : Fully detectable within stroke (mm)

Bore size		φ 16				φ 20				φ 25			
Mounting groove		A	B	C	Undetectable stroke range of sensor switch	A	B	C	Undetectable stroke range of sensor switch	A	B	C	Undetectable stroke range of sensor switch
Stroke		E	D			E	D			E	D		
10	Head side	△	○	○	Groove A (E) : 0~10 Groove B (D) : 2~10 Groove C : 4~10	△	○	○	Groove A (E) : 2~10 Groove B (D) : 6~10 Groove C : 8~10	○	○	○	Groove A (E) : — Groove B (D), C : 7~10
	Rod side	△	×	×		△	×	×		○	×	×	
20	Head side	△	○	○	Groove A (E) : 0~12 Groove B (D) : 7~20 Groove C : 9~20	△	○	○	Groove A (E) : 2~15 Groove B (D) : 11~20 Groove C : 13~20	○	○	○	Groove A (E) : — Groove B (D), C : 12~20
	Rod side	△	×	×		△	×	×		○	×	×	
30	Head side	○	○	○	Groove A (E) : 0~12 Groove B (D) : 12~26 Groove C : 14~24	○	○	○	Groove A (E) : 2~15 Groove B (D) : 16~30 Groove C : 18~30	○	○	○	Groove A (E) : — Groove B (D), C : 17~29
	Rod side	○	○	○		○	×	×		○	○	○	
40	Head side	○	○	○	Groove A (E) : 0~12 Groove B (D) : 17~31 Groove C : 19~29	○	○	○	Groove A (E) : 2~15 Groove B (D) : 21~37 Groove C : 23~35	○	○	○	Groove A (E) : — Groove B (D), C : 22~34
	Rod side	○	○	○		○	○	○		○	○	○	
50	Head side	○	○	○	Groove A (E) : 0~12 Groove B (D) : 22~36 Groove C : 24~34	○	○	○	Groove A (E) : 2~15 Groove B (D) : 26~42 Groove C : 28~40	○	○	○	Groove A (E) : — Groove B (D), C : 27~39
	Rod side	○	○	○		○	○	○		○	○	○	
60	Head side	○	○	○	Groove A (E) : 0~12 Groove B (D) : 27~41 Groove C : 29~39	○	○	○	Groove A (E) : 2~15 Groove B (D) : 31~47 Groove C : 33~45	○	○	○	Groove A (E) : — Groove B (D), C : 32~44
	Rod side	○	○	○		○	○	○		○	○	○	
70	Head side	○	○	○	Groove A (E) : 0~12 Groove B (D) : 32~46 Groove C : 34~44	○	○	○	Groove A (E) : 2~15 Groove B (D) : 36~52 Groove C : 38~50	○	○	○	Groove A (E) : — Groove B (D), C : 37~49
	Rod side	○	○	○		○	○	○		○	○	○	
80	Head side	○	○	○	Groove A (E) : 0~12 Groove B (D) : 37~51 Groove C : 39~49	○	○	○	Groove A (E) : 2~15 Groove B (D) : 41~57 Groove C : 43~55	○	○	○	Groove A (E) : — Groove B (D), C : 42~54
	Rod side	○	○	○		○	○	○		○	○	○	
90	Head side	○	○	○	Groove A (E) : 0~12 Groove B (D) : 42~56 Groove C : 44~54	○	○	○	Groove A (E) : 2~15 Groove B (D) : 46~62 Groove C : 48~60	○	○	○	Groove A (E) : — Groove B (D), C : 47~59
	Rod side	○	○	○		○	○	○		○	○	○	
100	Head side	○	○	○	Groove A (E) : 0~12 Groove B (D) : 47~61 Groove C : 49~59	○	○	○	Groove A (E) : 2~15 Groove B (D) : 51~67 Groove C : 53~65	○	○	○	Groove A (E) : — Groove B (D), C : 52~64
	Rod side	○	○	○		○	○	○		○	○	○	
110	Head side	○	○	○	Groove A (E) : 0~12 Groove B (D) : 52~66 Groove C : 54~64	○	○	○	Groove A (E) : 2~15 Groove B (D) : 56~72 Groove C : 58~70	○	○	○	Groove A (E) : — Groove B (D), C : 57~69
	Rod side	○	○	○		○	○	○		○	○	○	
120	Head side	○	○	○	Groove A (E) : 0~12 Groove B (D) : 57~71 Groove C : 59~69	○	○	○	Groove A (E) : 2~15 Groove B (D) : 61~77 Groove C : 63~75	○	○	○	Groove A (E) : — Groove B (D), C : 62~74
	Rod side	○	○	○		○	○	○		○	○	○	
130	Head side	○	○	○	Groove A (E) : 0~12 Groove B (D) : 62~76 Groove C : 64~74	○	○	○	Groove A (E) : 2~15 Groove B (D) : 66~82 Groove C : 68~80	○	○	○	Groove A (E) : — Groove B (D), C : 67~79
	Rod side	○	○	○		○	○	○		○	○	○	
140	Head side	○	○	○	Groove A (E) : 0~12 Groove B (D) : 67~81 Groove C : 69~79	○	○	○	Groove A (E) : 2~15 Groove B (D) : 71~87 Groove C : 73~85	○	○	○	Groove A (E) : — Groove B (D), C : 72~84
	Rod side	○	○	○		○	○	○		○	○	○	
150	Head side	○	○	○	Groove A (E) : 0~12 Groove B (D) : 72~86 Groove C : 74~84	○	○	○	Groove A (E) : 2~15 Groove B (D) : 76~92 Groove C : 78~90	○	○	○	Groove A (E) : — Groove B (D), C : 77~89
	Rod side	○	○	○		○	○	○		○	○	○	
160	Head side	○	○	○	Groove A (E) : 0~12 Groove B (D) : 77~91 Groove C : 79~89	○	○	○	Groove A (E) : 2~15 Groove B (D) : 81~97 Groove C : 83~95	○	○	○	Groove A (E) : — Groove B (D), C : 82~94
	Rod side	○	○	○		○	○	○		○	○	○	

Note: The undetectable stroke range appears due to interference between the sensor switch and the body mounting bolts.

■ Moving sensor switch

- Loosening the mounting screw allows the sensor switch to be moved along the switch mounting groove of the cylinder body.
- Tighten the mounting screw with a tightening torque of 0.1~0.2N·m [0.9~1.8in·lbf].

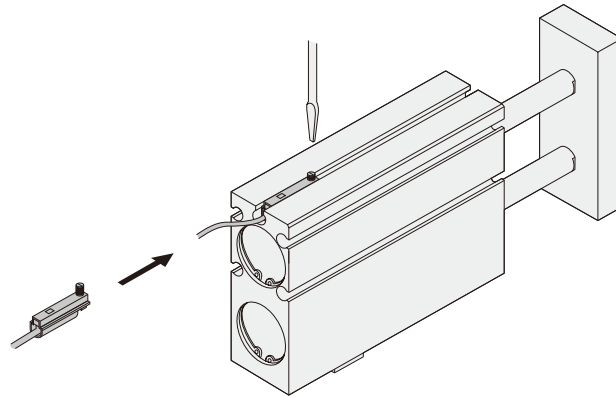

● Reed switch type

○ : Mountable △ : Either head side or rod side × : Unmountable — : Fully detectable within stroke (mm)


Bore size		φ 16				φ 20				φ 25			
Mounting groove		A	B	C	Undetectable stroke range of sensor switch	A	B	C	Undetectable stroke range of sensor switch	A	B	C	Undetectable stroke range of sensor switch
Stroke		E	D			E	D			E	D		
10	Head side	△	×	○	Groove A (E) : 0~10 Groove B (D) : 0~10 Groove C : 2~10	△	○	○	Groove A (E) : 0~10 Groove B (D) : 4~10 Groove C : 6~10	△	○	○	Groove A (E) : — Groove B (D), C : 6~10
	Rod side	△	×	×		△	×	×		△	×	×	
20	Head side	○	○	○	Groove A (E) : 0~14 Groove B (D) : 5~20 Groove C : 7~20	○	○	○	Groove A (E) : 0~17 Groove B (D) : 9~20 Groove C : 11~20	○	○	○	Groove A (E) : — Groove B (D), C : 11~20
	Rod side	○	×	×		○	×	×		○	×	×	
30	Head side	○	○	○	Groove A (E) : 0~14 Groove B (D) : 10~29 Groove C : 12~27	○	○	○	Groove A (E) : 0~17 Groove B (D) : 14~30 Groove C : 16~30	○	○	○	Groove A (E) : — Groove B (D), C : 16~30
	Rod side	○	○	○		○	×	×		○	×	×	
40	Head side	○	○	○	Groove A (E) : 0~14 Groove B (D) : 15~34 Groove C : 17~32	○	○	○	Groove A (E) : 0~17 Groove B (D) : 19~39 Groove C : 21~37	○	○	○	Groove A (E) : — Groove B (D), C : 21~36
	Rod side	○	○	○		○	○	○		○	○	○	
50	Head side	○	○	○	Groove A (E) : 2~14 Groove B (D) : 20~39 Groove C : 22~37	○	○	○	Groove A (E) : 0~17 Groove B (D) : 24~44 Groove C : 26~42	○	○	○	Groove A (E) : — Groove B (D), C : 26~41
	Rod side	○	○	○		○	○	○		○	○	○	
60	Head side	○	○	○	Groove A (E) : 0~14 Groove B (D) : 25~44 Groove C : 27~42	○	○	○	Groove A (E) : 0~17 Groove B (D) : 29~49 Groove C : 31~47	○	○	○	Groove A (E) : — Groove B (D), C : 31~46
	Rod side	○	○	○		○	○	○		○	○	○	
70	Head side	○	○	○	Groove A (E) : 0~14 Groove B (D) : 30~49 Groove C : 32~47	○	○	○	Groove A (E) : 0~17 Groove B (D) : 34~54 Groove C : 36~52	○	○	○	Groove A (E) : — Groove B (D), C : 36~51
	Rod side	○	○	○		○	○	○		○	○	○	
80	Head side	○	○	○	Groove A (E) : 0~12 Groove B (D) : 35~54 Groove C : 37~52	○	○	○	Groove A (E) : 0~17 Groove B (D) : 39~59 Groove C : 41~57	○	○	○	Groove A (E) : — Groove B (D), C : 41~56
	Rod side	○	○	○		○	○	○		○	○	○	
90	Head side	○	○	○	Groove A (E) : 0~14 Groove B (D) : 40~59 Groove C : 42~57	○	○	○	Groove A (E) : 0~17 Groove B (D) : 44~64 Groove C : 46~62	○	○	○	Groove A (E) : — Groove B (D), C : 46~61
	Rod side	○	○	○		○	○	○		○	○	○	
100	Head side	○	○	○	Groove A (E) : 0~14 Groove B (D) : 45~64 Groove C : 47~62	○	○	○	Groove A (E) : 0~17 Groove B (D) : 49~69 Groove C : 51~67	○	○	○	Groove A (E) : — Groove B (D), C : 51~66
	Rod side	○	○	○		○	○	○		○	○	○	
110	Head side	○	○	○	Groove A (E) : 0~14 Groove B (D) : 50~69 Groove C : 52~67	○	○	○	Groove A (E) : 0~17 Groove B (D) : 54~74 Groove C : 56~72	○	○	○	Groove A (E) : — Groove B (D), C : 56~71
	Rod side	○	○	○		○	○	○		○	○	○	
120	Head side	○	○	○	Groove A (E) : 0~14 Groove B (D) : 55~74 Groove C : 57~72	○	○	○	Groove A (E) : 0~17 Groove B (D) : 59~79 Groove C : 61~77	○	○	○	Groove A (E) : — Groove B (D), C : 61~76
	Rod side	○	○	○		○	○	○		○	○	○	
130	Head side	○	○	○	Groove A (E) : 0~14 Groove B (D) : 60~79 Groove C : 62~77	○	○	○	Groove A (E) : 0~17 Groove B (D) : 64~84 Groove C : 66~82	○	○	○	Groove A (E) : — Groove B (D), C : 66~81
	Rod side	○	○	○		○	○	○		○	○	○	
140	Head side	○	○	○	Groove A (E) : 0~14 Groove B (D) : 65~84 Groove C : 67~82	○	○	○	Groove A (E) : 0~17 Groove B (D) : 69~89 Groove C : 71~87	○	○	○	Groove A (E) : — Groove B (D), C : 71~86
	Rod side	○	○	○		○	○	○		○	○	○	
150	Head side	○	○	○	Groove A (E) : 0~14 Groove B (D) : 70~89 Groove C : 72~87	○	○	○	Groove A (E) : 0~17 Groove B (D) : 74~94 Groove C : 76~92	○	○	○	Groove A (E) : — Groove B (D), C : 76~91
	Rod side	○	○	○		○	○	○		○	○	○	
160	Head side	○	○	○	Groove A (E) : 0~14 Groove B (D) : 75~94 Groove C : 77~92	○	○	○	Groove A (E) : 0~17 Groove B (D) : 79~99 Groove C : 81~97	○	○	○	Groove A (E) : — Groove B (D), C : 81~96
	Rod side	○	○	○		○	○	○		○	○	○	

Note: The undetectable stroke range appears due to interference between the sensor switch and the body mounting bolts.


Mountable or Unmountable Sensor Switch and Undetectable Stroke Range at End of Stroke

Head side end keep cylinder (TBD AK-HL)

In the case of using 3 rod side mounting holes on the body

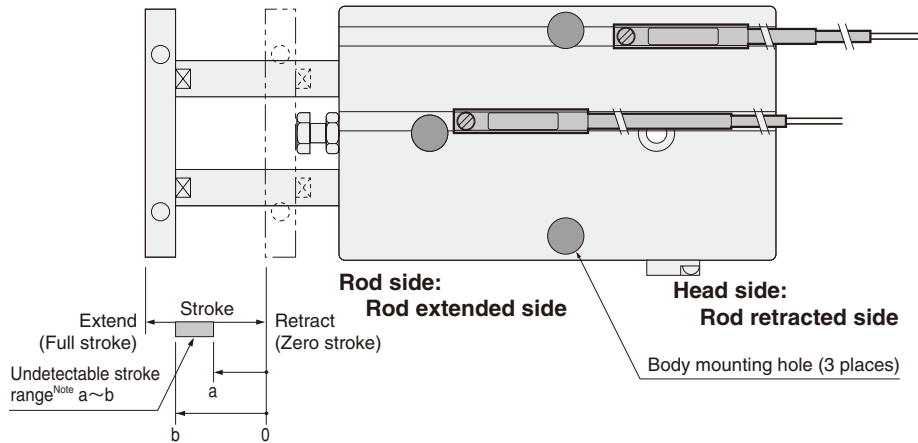

● Sensor switch mounting surface



Mounting a sensor switch in any of the grooves A~E allows detection at either the head side or rod side stroke end, and intermediate positions. The diagram shows the rod side with the square plate removed.

Note: The undetectable stroke range is the value measured from the zero stroke with 1 sensor switch installation.

● Solid state type


○ : Mountable △ : Either head side or rod side × : Unmountable — : Fully detectable within stroke (mm)

Bore size		φ 16			φ 20			φ 25		
Stroke	Mounting groove	A	B	C	A	B	C	A	B	C
		E	D		E	D		E	D	
10	Head side	○	○	○	○	○	○	○	○	○
	Rod side	○	×	×	○	×	×	○	×	×
		Undetectable stroke range of sensor switch			Undetectable stroke range of sensor switch			Undetectable stroke range of sensor switch		
		Groove A (E) : — Groove B (D) : 2~10 Groove C : 4~10			Groove A (E) : — Groove B (D) : 6~10 Groove C : 8~10			Groove A (E) : — Groove B (D), C : 7~10		
20	Head side	○	○	○	○	○	○	○	○	○
	Rod side	○	×	×	○	×	×	○	×	×
		Groove A (E) : — Groove B (D) : 7~20 Groove C : 9~20			Groove A (E) : — Groove B (D) : 11~20 Groove C : 13~20			Groove A (E) : — Groove B (D), C : 12~20		
30	Head side	○	○	○	○	○	○	○	○	○
	Rod side	○	○	○	○	×	×	○	○	○
		Groove A (E) : — Groove B (D) : 12~26 Groove C : 14~24			Groove A (E) : — Groove B (D) : 16~30 Groove C : 18~30			Groove A (E) : — Groove B (D), C : 17~29		
40	Head side	○	○	○	○	○	○	○	○	○
	Rod side	○	○	○	○	○	○	○	○	○
		Groove A (E) : — Groove B (D) : 17~31 Groove C : 19~29			Groove A (E) : — Groove B (D) : 21~37 Groove C : 23~35			Groove A (E) : — Groove B (D), C : 22~34		
50	Head side	○	○	○	○	○	○	○	○	○
	Rod side	○	○	○	○	○	○	○	○	○
		Groove A (E) : — Groove B (D) : 22~36 Groove C : 24~34			Groove A (E) : — Groove B (D) : 26~42 Groove C : 28~40			Groove A (E) : — Groove B (D), C : 27~39		
60	Head side	○	○	○	○	○	○	○	○	○
	Rod side	○	○	○	○	○	○	○	○	○
		Groove A (E) : — Groove B (D) : 27~41 Groove C : 29~39			Groove A (E) : — Groove B (D) : 31~47 Groove C : 33~45			Groove A (E) : — Groove B (D), C : 32~44		
70	Head side	○	○	○	○	○	○	○	○	○
	Rod side	○	○	○	○	○	○	○	○	○
		Groove A (E) : — Groove B (D) : 32~46 Groove C : 34~44			Groove A (E) : — Groove B (D) : 36~52 Groove C : 38~50			Groove A (E) : — Groove B (D), C : 37~49		
80	Head side	○	○	○	○	○	○	○	○	○
	Rod side	○	○	○	○	○	○	○	○	○
		Groove A (E) : — Groove B (D) : 37~51 Groove C : 39~49			Groove A (E) : — Groove B (D) : 41~57 Groove C : 43~55			Groove A (E) : — Groove B (D), C : 42~54		
90	Head side	○	○	○	○	○	○	○	○	○
	Rod side	○	○	○	○	○	○	○	○	○
		Groove A (E) : — Groove B (D) : 42~56 Groove C : 44~54			Groove A (E) : — Groove B (D) : 46~62 Groove C : 48~60			Groove A (E) : — Groove B (D), C : 47~59		
100	Head side	○	○	○	○	○	○	○	○	○
	Rod side	○	○	○	○	○	○	○	○	○
		Groove A (E) : — Groove B (D) : 47~61 Groove C : 49~59			Groove A (E) : — Groove B (D) : 51~67 Groove C : 53~65			Groove A (E) : — Groove B (D), C : 52~64		
110	Head side	○	○	○	○	○	○	○	○	○
	Rod side	○	○	○	○	○	○	○	○	○
		Groove A (E) : — Groove B (D) : 52~66 Groove C : 54~64			Groove A (E) : — Groove B (D) : 56~72 Groove C : 58~70			Groove A (E) : — Groove B (D), C : 57~69		
120	Head side	○	○	○	○	○	○	○	○	○
	Rod side	○	○	○	○	○	○	○	○	○
		Groove A (E) : — Groove B (D) : 57~71 Groove C : 59~69			Groove A (E) : — Groove B (D) : 61~77 Groove C : 63~75			Groove A (E) : — Groove B (D), C : 62~74		
130	Head side	○	○	○	○	○	○	○	○	○
	Rod side	○	○	○	○	○	○	○	○	○
		Groove A (E) : — Groove B (D) : 62~76 Groove C : 64~74			Groove A (E) : — Groove B (D) : 66~82 Groove C : 68~80			Groove A (E) : — Groove B (D), C : 67~79		
140	Head side	○	○	○	○	○	○	○	○	○
	Rod side	○	○	○	○	○	○	○	○	○
		Groove A (E) : — Groove B (D) : 67~81 Groove C : 69~79			Groove A (E) : — Groove B (D) : 71~87 Groove C : 73~85			Groove A (E) : — Groove B (D), C : 72~84		
150	Head side	○	○	○	○	○	○	○	○	○
	Rod side	○	○	○	○	○	○	○	○	○
		Groove A (E) : — Groove B (D) : 72~86 Groove C : 74~84			Groove A (E) : — Groove B (D) : 76~92 Groove C : 78~90			Groove A (E) : — Groove B (D), C : 77~89		
160	Head side	○	○	○	○	○	○	○	○	○
	Rod side	○	○	○	○	○	○	○	○	○
		Groove A (E) : — Groove B (D) : 77~91 Groove C : 79~89			Groove A (E) : — Groove B (D) : 81~97 Groove C : 83~95			Groove A (E) : — Groove B (D), C : 82~94		

Note: The undetectable stroke range appears due to interference between the sensor switch and the body mounting bolts.

Moving sensor switch

- Loosening the mounting screw allows the sensor switch to be moved along the switch mounting groove of the cylinder body.
- Tighten the mounting screw with a tightening torque of 0.1~0.2N·m [0.9~1.8in·lbf].

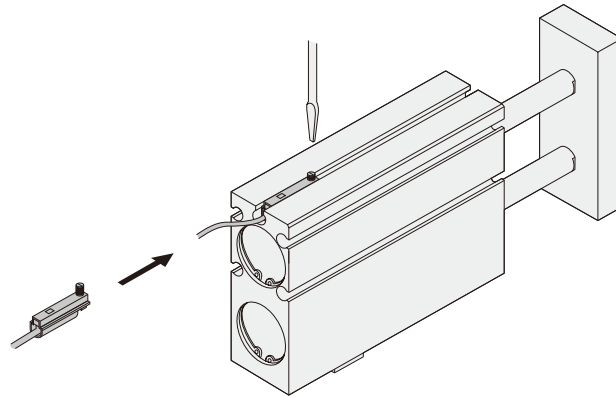

Reed switch type

○ : Mountable △ : Either head side or rod side × : Unmountable — : Fully detectable within stroke (mm)


Bore size		φ 16			φ 20			φ 25		
Stroke	Mounting groove	A	B	C	A	B	C	A	B	C
		E	D		E	D		E	D	
Undetectable stroke range of sensor switch										
10	Head side	△	×	○	△	○	○	△	○	○
	Rod side	△	×	×	△	×	×	△	×	×
		Groove A (E) : — Groove B (D) : 0~10 Groove C : 2~10			Groove A (E) : — Groove B (D) : 4~10 Groove C : 6~10			Groove A (E) : — Groove B (D), C : 6~10		
20	Head side	○	○	○	○	○	○	○	○	○
	Rod side	○	×	×	○	×	×	○	×	×
		Groove A (E) : — Groove B (D) : 5~20 Groove C : 7~20			Groove A (E) : — Groove B (D) : 9~20 Groove C : 11~20			Groove A (E) : — Groove B (D), C : 11~20		
30	Head side	○	○	○	○	○	○	○	○	○
	Rod side	○	○	○	○	×	×	○	×	×
		Groove A (E) : — Groove B (D) : 10~29 Groove C : 12~27			Groove A (E) : — Groove B (D) : 14~30 Groove C : 16~30			Groove A (E) : — Groove B (D), C : 16~30		
40	Head side	○	○	○	○	○	○	○	○	○
	Rod side	○	○	○	○	○	○	○	○	○
		Groove A (E) : — Groove B (D) : 15~34 Groove C : 17~32			Groove A (E) : — Groove B (D) : 19~39 Groove C : 21~37			Groove A (E) : — Groove B (D), C : 21~36		
50	Head side	○	○	○	○	○	○	○	○	○
	Rod side	○	○	○	○	○	○	○	○	○
		Groove A (E) : — Groove B (D) : 20~39 Groove C : 22~37			Groove A (E) : — Groove B (D) : 24~44 Groove C : 26~42			Groove A (E) : — Groove B (D), C : 26~41		
60	Head side	○	○	○	○	○	○	○	○	○
	Rod side	○	○	○	○	○	○	○	○	○
		Groove A (E) : — Groove B (D) : 25~44 Groove C : 27~42			Groove A (E) : — Groove B (D) : 29~49 Groove C : 31~47			Groove A (E) : — Groove B (D), C : 31~46		
70	Head side	○	○	○	○	○	○	○	○	○
	Rod side	○	○	○	○	○	○	○	○	○
		Groove A (E) : — Groove B (D) : 30~49 Groove C : 32~47			Groove A (E) : — Groove B (D) : 34~54 Groove C : 36~52			Groove A (E) : — Groove B (D), C : 36~51		
80	Head side	○	○	○	○	○	○	○	○	○
	Rod side	○	○	○	○	○	○	○	○	○
		Groove A (E) : — Groove B (D) : 35~54 Groove C : 37~52			Groove A (E) : — Groove B (D) : 39~59 Groove C : 41~57			Groove A (E) : — Groove B (D), C : 41~56		
90	Head side	○	○	○	○	○	○	○	○	○
	Rod side	○	○	○	○	○	○	○	○	○
		Groove A (E) : — Groove B (D) : 40~59 Groove C : 42~57			Groove A (E) : — Groove B (D) : 44~64 Groove C : 46~62			Groove A (E) : — Groove B (D), C : 46~61		
100	Head side	○	○	○	○	○	○	○	○	○
	Rod side	○	○	○	○	○	○	○	○	○
		Groove A (E) : — Groove B (D) : 45~64 Groove C : 47~62			Groove A (E) : — Groove B (D) : 49~69 Groove C : 51~67			Groove A (E) : — Groove B (D), C : 51~66		
110	Head side	○	○	○	○	○	○	○	○	○
	Rod side	○	○	○	○	○	○	○	○	○
		Groove A (E) : — Groove B (D) : 50~69 Groove C : 52~67			Groove A (E) : — Groove B (D) : 54~74 Groove C : 56~72			Groove A (E) : — Groove B (D), C : 56~71		
120	Head side	○	○	○	○	○	○	○	○	○
	Rod side	○	○	○	○	○	○	○	○	○
		Groove A (E) : — Groove B (D) : 55~74 Groove C : 57~72			Groove A (E) : — Groove B (D) : 59~79 Groove C : 61~77			Groove A (E) : — Groove B (D), C : 61~76		
130	Head side	○	○	○	○	○	○	○	○	○
	Rod side	○	○	○	○	○	○	○	○	○
		Groove A (E) : — Groove B (D) : 60~79 Groove C : 62~77			Groove A (E) : — Groove B (D) : 64~84 Groove C : 66~82			Groove A (E) : — Groove B (D), C : 66~81		
140	Head side	○	○	○	○	○	○	○	○	○
	Rod side	○	○	○	○	○	○	○	○	○
		Groove A (E) : — Groove B (D) : 65~84 Groove C : 67~82			Groove A (E) : — Groove B (D) : 69~89 Groove C : 71~87			Groove A (E) : — Groove B (D), C : 71~86		
150	Head side	○	○	○	○	○	○	○	○	○
	Rod side	○	○	○	○	○	○	○	○	○
		Groove A (E) : — Groove B (D) : 70~89 Groove C : 72~87			Groove A (E) : — Groove B (D) : 74~94 Groove C : 76~92			Groove A (E) : — Groove B (D), C : 76~91		
160	Head side	○	○	○	○	○	○	○	○	○
	Rod side	○	○	○	○	○	○	○	○	○
		Groove A (E) : — Groove B (D) : 75~94 Groove C : 77~92			Groove A (E) : — Groove B (D) : 79~99 Groove C : 81~97			Groove A (E) : — Groove B (D), C : 81~96		

Note: The undetectable stroke range appears due to interference between the sensor switch and the body mounting bolts.

Mountable or Unmountable Sensor Switch and Undetectable Stroke Range at End of Stroke


Rod side end keep cylinder (TBD-RL)

■ In the case of using 4 mounting holes on the body

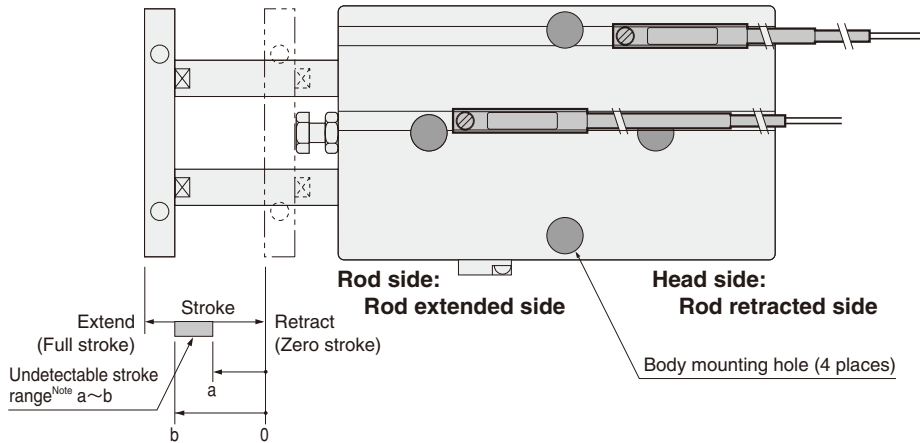

Note: The undetectable stroke range is the value measured from the zero stroke with 1 sensor switch installation.

● Sensor switch mounting surface



Mounting a sensor switch in any of the grooves A~E allows detection at either the head side or rod side stroke end, and intermediate positions. The diagram shows the rod side with the square plate removed.

Caution

When mounting a sensor switch in the A or E groove's rod extended side (the rod side of the body), ensure that the sensor switch is installed inside the groove between body mounting holes before tightening body mounting bolts, to avoid interference between the sensor switch and the bolts.

This procedure is not necessary for $\phi 25$ [0.984in.], however, where no interference occurs.

● Solid state type


○ : Mountable △ : Either head side or rod side × : Unmountable — : Fully detectable within stroke (mm)

Bore size		$\phi 16$			$\phi 20$			$\phi 25$		
Stroke	Mounting groove	A	B	C	A	B	C	A	B	C
		E	D	C	E	D	C	E	D	C
10	Head side	×	△	△	○	△	○	○	○	○
	Rod side	×	△	△	×	△	○	○	○	○
20	Head side	×	○	○	○	○	○	○	○	○
	Rod side	○	○	○	○	○	○	○	○	○
30	Head side	×	○	○	○	○	○	○	○	○
	Rod side	○	○	○	○	○	○	○	○	○
40	Head side	×	○	○	○	○	○	○	○	○
	Rod side	○	×	×	○	○	○	○	○	○
50	Head side	×	○	○	○	○	○	○	○	○
	Rod side	○	×	×	○	×	×	○	×	×
60	Head side	×	○	○	○	○	○	○	○	○
	Rod side	○	×	×	○	×	×	○	×	×
70	Head side	×	○	○	○	○	○	○	○	○
	Rod side	○	○	○	○	×	×	○	○	○
80	Head side	×	○	○	○	○	○	○	○	○
	Rod side	○	○	○	○	○	○	○	○	○
90	Head side	×	○	○	○	○	○	○	○	○
	Rod side	○	○	○	○	○	○	○	○	○
100	Head side	×	○	○	○	○	○	○	○	○
	Rod side	○	○	○	○	○	○	○	○	○
110	Head side	×	○	○	○	○	○	○	○	○
	Rod side	○	○	○	○	○	○	○	○	○
120	Head side	×	○	○	○	○	○	○	○	○
	Rod side	○	○	○	○	○	○	○	○	○
130	Head side	×	○	○	○	○	○	○	○	○
	Rod side	○	○	○	○	○	○	○	○	○
140	Head side	×	○	○	○	○	○	○	○	○
	Rod side	○	○	○	○	○	○	○	○	○
150	Head side	×	○	○	○	○	○	○	○	○
	Rod side	○	○	○	○	○	○	○	○	○
160	Head side	×	○	○	○	○	○	○	○	○
	Rod side	○	○	○	○	○	○	○	○	○

Note: The undetectable stroke range appears due to interference between the sensor switch and the body mounting bolts.

■ Moving sensor switch

- Loosening the mounting screw allows the sensor switch to be moved along the switch mounting groove of the cylinder body.
- Tighten the mounting screw with a tightening torque of 0.1~0.2N·m [0.9~1.8in·lbf].

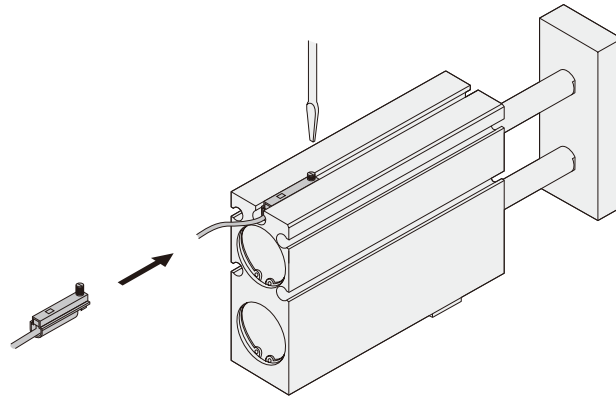

● Reed switch type

○ : Mountable △ : Either head side or rod side × : Unmountable — : Fully detectable within stroke (mm)


Bore size		φ 16				φ 20				φ 25			
Stroke	Mounting groove	A	B	C	Undetectable stroke range of sensor switch	A	B	C	Undetectable stroke range of sensor switch	A	B	C	Undetectable stroke range of sensor switch
		E	D			E	D			E	D		
10	Head side	×	△	△	Groove A (E) : 0~10 Groove B (D) : — Groove C : —	×	△	△	Groove A (E) : 0~10 Groove B (D) : — Groove C : —	△	△	△	Groove A (E) : — Groove B (D), C : —
	Rod side	×	△	△		×	△	△		△	△	△	
20	Head side	×	○	○	Groove A (E) : 0~14 Groove B (D) : — Groove C : —	×	○	○	Groove A (E) : 0~17 Groove B (D) : — Groove C : —	○	○	○	Groove A (E) : — Groove B (D), C : —
	Rod side	○	○	○		○	○	○		○	○	○	
30	Head side	×	○	○	Groove A (E) : 0~14 Groove B (D) : 29~30 Groove C : —	×	○	○	Groove A (E) : 0~17 Groove B (D) : — Groove C : —	○	○	○	Groove A (E) : — Groove B (D), C : —
	Rod side	○	×	○		○	○	○		○	○	○	
40	Head side	×	○	○	Groove A (E) : 0~14 Groove B (D) : 35~40 Groove C : 37~40	×	○	○	Groove A (E) : 0~17 Groove B (D) : 39~40 Groove C : —	○	○	○	Groove A (E) : — Groove B (D), C : —
	Rod side	○	×	×		○	×	○		○	○	○	
50	Head side	×	○	○	Groove A (E) : 0~14 Groove B (D) : 40~50 Groove C : 42~50	×	○	○	Groove A (E) : 0~17 Groove B (D) : 44~50 Groove C : 46~50	○	○	○	Groove A (E) : — Groove B (D), C : 46~60
	Rod side	○	×	×		○	×	×		○	×	×	
60	Head side	×	○	○	Groove A (E) : 0~14 Groove B (D) : 45~60 Groove C : 47~60	×	○	○	Groove A (E) : 0~17 Groove B (D) : 49~60 Groove C : 51~60	○	○	○	Groove A (E) : — Groove B (D), C : 51~60
	Rod side	○	×	×		○	×	×		○	×	×	
70	Head side	×	○	○	Groove A (E) : 0~14 Groove B (D) : 50~69 Groove C : 52~67	×	○	○	Groove A (E) : 0~17 Groove B (D) : 54~70 Groove C : 56~70	○	○	○	Groove A (E) : — Groove B (D), C : 56~70
	Rod side	○	○	○		○	×	×		○	×	×	
80	Head side	×	○	○	Groove A (E) : 0~14 Groove B (D) : 55~74 Groove C : 57~72	×	○	○	Groove A (E) : 0~17 Groove B (D) : 59~79 Groove C : 61~77	○	○	○	Groove A (E) : — Groove B (D), C : 61~76
	Rod side	○	○	○		○	○	○		○	○	○	
90	Head side	×	○	○	Groove A (E) : 0~14 Groove B (D) : 60~79 Groove C : 62~77	×	○	○	Groove A (E) : 0~17 Groove B (D) : 64~84 Groove C : 66~82	○	○	○	Groove A (E) : — Groove B (D), C : 66~81
	Rod side	○	○	○		○	○	○		○	○	○	
100	Head side	×	○	○	Groove A (E) : 0~14 Groove B (D) : 65~84 Groove C : 67~82	×	○	○	Groove A (E) : 0~17 Groove B (D) : 69~89 Groove C : 71~87	○	○	○	Groove A (E) : — Groove B (D), C : 71~86
	Rod side	○	○	○		○	○	○		○	○	○	
110	Head side	×	○	○	Groove A (E) : 0~14 Groove B (D) : 70~89 Groove C : 72~87	×	○	○	Groove A (E) : 0~17 Groove B (D) : 74~94 Groove C : 76~92	○	○	○	Groove A (E) : — Groove B (D), C : 76~91
	Rod side	○	○	○		○	○	○		○	○	○	
120	Head side	×	○	○	Groove A (E) : 0~14 Groove B (D) : 75~94 Groove C : 77~92	×	○	○	Groove A (E) : 0~17 Groove B (D) : 79~99 Groove C : 81~97	○	○	○	Groove A (E) : — Groove B (D), C : 81~96
	Rod side	○	○	○		○	○	○		○	○	○	
130	Head side	×	○	○	Groove A (E) : 0~14 Groove B (D) : 80~99 Groove C : 82~97	×	○	○	Groove A (E) : 0~17 Groove B (D) : 84~104 Groove C : 86~102	○	○	○	Groove A (E) : — Groove B (D), C : 86~101
	Rod side	○	○	○		○	○	○		○	○	○	
140	Head side	×	○	○	Groove A (E) : 0~14 Groove B (D) : 85~104 Groove C : 87~102	×	○	○	Groove A (E) : 0~17 Groove B (D) : 89~109 Groove C : 91~107	○	○	○	Groove A (E) : — Groove B (D), C : 91~106
	Rod side	○	○	○		○	○	○		○	○	○	
150	Head side	×	○	○	Groove A (E) : 0~14 Groove B (D) : 90~109 Groove C : 92~107	×	○	○	Groove A (E) : 0~17 Groove B (D) : 94~114 Groove C : 96~112	○	○	○	Groove A (E) : — Groove B (D), C : 96~111
	Rod side	○	○	○		○	○	○		○	○	○	
160	Head side	×	○	○	Groove A (E) : 0~14 Groove B (D) : 95~114 Groove C : 97~112	×	○	○	Groove A (E) : 0~17 Groove B (D) : 99~119 Groove C : 101~117	○	○	○	Groove A (E) : — Groove B (D), C : 101~116
	Rod side	○	○	○		○	○	○		○	○	○	

Note: The undetectable stroke range appears due to interference between the sensor switch and the body mounting bolts.


Mountable or Unmountable Sensor Switch and Undetectable Stroke Range at End of Stroke

Rod side end keep cylinder (TBD-RL)

In the case of using 2 center mounting holes on the body

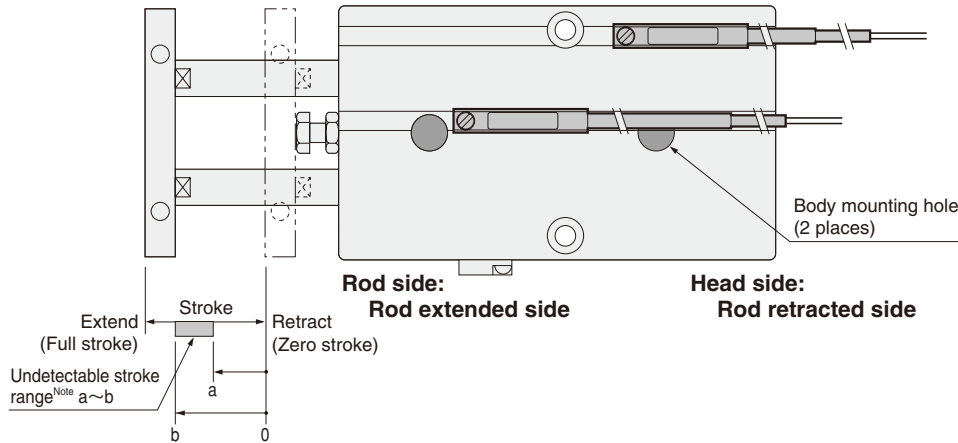

● Sensor switch mounting surface



Mounting a sensor switch in any of the grooves **A~E** allows detection at either the head side or rod side stroke end, and intermediate positions. The diagram shows the rod side with the square plate removed.

Caution

When mounting a sensor switch in the **A** or **E** groove's rod extended side (the rod side of the body), ensure that the sensor switch is installed inside the groove between body mounting holes before tightening body mounting bolts, to avoid interference between the sensor switch and the bolts.

This procedure is not necessary for $\phi 25$ [0.984in.], however, where no interference occurs.

Note: The undetectable stroke range is the value measured from the zero stroke with 1 sensor switch installation.

● Solid state type


○ : Mountable △ : Either head side or rod side × : Unmountable — : Fully detectable within stroke (mm)

Bore size		φ 16			φ 20			φ 25					
Stroke	Mounting groove	A	B	C	Undetectable stroke range of sensor switch	A	B	C	Undetectable stroke range of sensor switch	A	B	C	Undetectable stroke range of sensor switch
		E	D			E	D			E	D		
10	Head side	×	○	○	Groove A (E) : 0~10 Groove B (D), C : —	○	○	○	Groove A (E) : 2~10 Groove B (D), C : —	○	○	○	Groove A (E) : — Groove B (D), C : —
	Rod side	×	○	○		×	○	○		○	○	○	
20	Head side	×	○	○	Groove A (E) : 0~12 Groove B (D), C : —	○	○	○	Groove A (E) : 2~15 Groove B (D), C : —	○	○	○	Groove A (E) : — Groove B (D), C : —
	Rod side	○	○	○		○	○	○		○	○	○	
30	Head side	×	○	○	Groove A (E) : 0~12 Groove B (D), C : —	○	○	○	Groove A (E) : 2~15 Groove B (D), C : —	○	○	○	Groove A (E) : — Groove B (D), C : —
	Rod side	○	○	○		○	○	○		○	○	○	
40	Head side	×	○	○	Groove A (E) : 0~12 Groove B (D), C : —	○	○	○	Groove A (E) : 2~15 Groove B (D), C : —	○	○	○	Groove A (E) : — Groove B (D), C : —
	Rod side	○	○	○		○	○	○		○	○	○	
50	Head side	×	○	○	Groove A (E) : 0~12 Groove B (D), C : —	○	○	○	Groove A (E) : 2~15 Groove B (D), C : —	○	○	○	Groove A (E) : — Groove B (D), C : —
	Rod side	○	○	○		○	○	○		○	○	○	
60	Head side	×	○	○	Groove A (E) : 0~12 Groove B (D), C : —	○	○	○	Groove A (E) : 2~15 Groove B (D), C : —	○	○	○	Groove A (E) : — Groove B (D), C : —
	Rod side	○	○	○		○	○	○		○	○	○	
70	Head side	×	○	○	Groove A (E) : 0~12 Groove B (D), C : —	○	○	○	Groove A (E) : 2~15 Groove B (D), C : —	○	○	○	Groove A (E) : — Groove B (D), C : —
	Rod side	○	○	○		○	○	○		○	○	○	
80	Head side	×	○	○	Groove A (E) : 0~12 Groove B (D), C : —	○	○	○	Groove A (E) : 2~15 Groove B (D), C : —	○	○	○	Groove A (E) : — Groove B (D), C : —
	Rod side	○	○	○		○	○	○		○	○	○	
90	Head side	×	○	○	Groove A (E) : 0~12 Groove B (D), C : —	○	○	○	Groove A (E) : 2~15 Groove B (D), C : —	○	○	○	Groove A (E) : — Groove B (D), C : —
	Rod side	○	○	○		○	○	○		○	○	○	
100	Head side	×	○	○	Groove A (E) : 0~12 Groove B (D), C : —	○	○	○	Groove A (E) : 2~15 Groove B (D), C : —	○	○	○	Groove A (E) : — Groove B (D), C : —
	Rod side	○	○	○		○	○	○		○	○	○	
110	Head side	×	○	○	Groove A (E) : 0~12 Groove B (D), C : —	○	○	○	Groove A (E) : 2~15 Groove B (D), C : —	○	○	○	Groove A (E) : — Groove B (D), C : —
	Rod side	○	○	○		○	○	○		○	○	○	
120	Head side	×	○	○	Groove A (E) : 0~12 Groove B (D), C : —	○	○	○	Groove A (E) : 2~15 Groove B (D), C : —	○	○	○	Groove A (E) : — Groove B (D), C : —
	Rod side	○	○	○		○	○	○		○	○	○	
130	Head side	×	○	○	Groove A (E) : 0~12 Groove B (D), C : —	○	○	○	Groove A (E) : 2~15 Groove B (D), C : —	○	○	○	Groove A (E) : — Groove B (D), C : —
	Rod side	○	○	○		○	○	○		○	○	○	
140	Head side	×	○	○	Groove A (E) : 0~12 Groove B (D), C : —	○	○	○	Groove A (E) : 2~15 Groove B (D), C : —	○	○	○	Groove A (E) : — Groove B (D), C : —
	Rod side	○	○	○		○	○	○		○	○	○	
150	Head side	×	○	○	Groove A (E) : 0~12 Groove B (D), C : —	○	○	○	Groove A (E) : 2~15 Groove B (D), C : —	○	○	○	Groove A (E) : — Groove B (D), C : —
	Rod side	○	○	○		○	○	○		○	○	○	
160	Head side	×	○	○	Groove A (E) : 0~12 Groove B (D), C : —	○	○	○	Groove A (E) : 2~15 Groove B (D), C : —	○	○	○	Groove A (E) : — Groove B (D), C : —
	Rod side	○	○	○		○	○	○		○	○	○	

Note: The undetectable stroke range appears due to interference between the sensor switch and the body mounting bolts.

■ Moving sensor switch

- Loosening the mounting screw allows the sensor switch to be moved along the switch mounting groove of the cylinder body.
- Tighten the mounting screw with a tightening torque of 0.1~0.2N·m [0.9~1.8in·lbf].

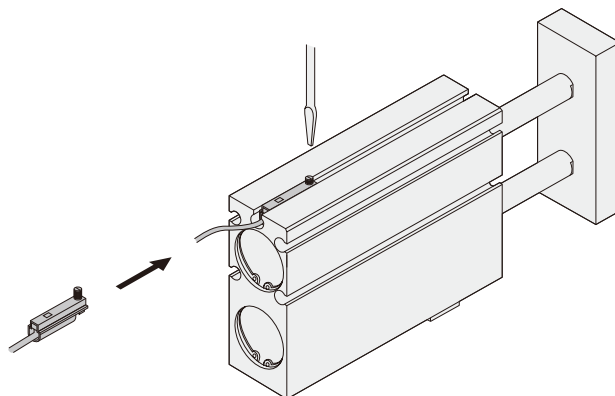

● Reed switch type

○ : Mountable △ : Either head side or rod side × : Unmountable — : Fully detectable within stroke (mm)


Bore size		φ 16			φ 20			φ 25		
Stroke	Mounting groove	A	B	C	A	B	C	A	B	C
		E	D		E	D		E	D	
Undetectable stroke range of sensor switch										
10	Head side	×	○	○	×	○	○	△	○	○
	Rod side	×	○	○	×	○	○	△	○	○
20	Head side	×	○	○	×	○	○	○	○	○
	Rod side	○	○	○	○	○	○	○	○	○
30	Head side	×	○	○	×	○	○	○	○	○
	Rod side	○	○	○	○	○	○	○	○	○
40	Head side	×	○	○	×	○	○	○	○	○
	Rod side	○	○	○	○	○	○	○	○	○
50	Head side	×	○	○	×	○	○	○	○	○
	Rod side	○	○	○	○	○	○	○	○	○
60	Head side	×	○	○	×	○	○	○	○	○
	Rod side	○	○	○	○	○	○	○	○	○
70	Head side	×	○	○	×	○	○	○	○	○
	Rod side	○	○	○	○	○	○	○	○	○
80	Head side	×	○	○	×	○	○	○	○	○
	Rod side	○	○	○	○	○	○	○	○	○
90	Head side	×	○	○	×	○	○	○	○	○
	Rod side	○	○	○	○	○	○	○	○	○
100	Head side	×	○	○	×	○	○	○	○	○
	Rod side	○	○	○	○	○	○	○	○	○
110	Head side	×	○	○	×	○	○	○	○	○
	Rod side	○	○	○	○	○	○	○	○	○
120	Head side	×	○	○	×	○	○	○	○	○
	Rod side	○	○	○	○	○	○	○	○	○
130	Head side	×	○	○	×	○	○	○	○	○
	Rod side	○	○	○	○	○	○	○	○	○
140	Head side	×	○	○	×	○	○	○	○	○
	Rod side	○	○	○	○	○	○	○	○	○
150	Head side	×	○	○	×	○	○	○	○	○
	Rod side	○	○	○	○	○	○	○	○	○
160	Head side	×	○	○	×	○	○	○	○	○
	Rod side	○	○	○	○	○	○	○	○	○

Note: The undetectable stroke range appears due to interference between the sensor switch and the body mounting bolts.


Mountable or Unmountable Sensor Switch and Undetectable Stroke Range at End of Stroke

Rod side end keep cylinder (TBD-RL)

■ In the case of using 2 mounting holes on the body
(one on each side)

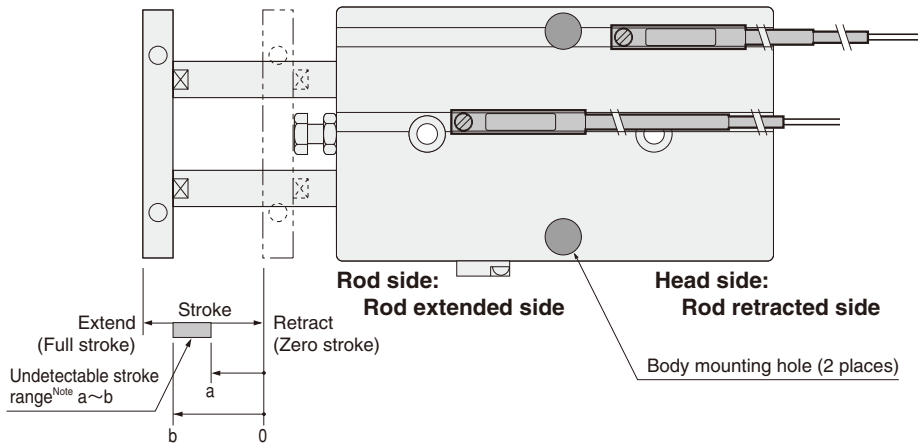

● Sensor switch mounting surface



Mounting a sensor switch in any of the grooves A~E allows detection at either the head side or rod side stroke end, and intermediate positions. The diagram shows the rod side with the square plate removed.

Note: The undetectable stroke range is the value measured from the zero stroke with 1 sensor switch installation.

● Solid state type


○ : Mountable △ : Either head side or rod side × : Unmountable — : Fully detectable within stroke (mm)

Bore size		φ 16			φ 20			φ 25		
Stroke	Mounting groove	A	B	C	A	B	C	A	B	C
		E	D		E	D		E	D	
10	Head side	○	△	△	△	△	○	○	○	○
	Rod side	○	△	△	△	△	○	○	○	○
20	Head side	○	○	○	○	○	○	○	○	○
	Rod side	○	○	○	○	○	○	○	○	○
30	Head side	○	○	○	○	○	○	○	○	○
	Rod side	○	○	○	○	○	○	○	○	○
40	Head side	○	○	○	○	○	○	○	○	○
	Rod side	○	×	×	○	○	○	○	○	○
50	Head side	○	○	○	○	○	○	○	○	○
	Rod side	○	×	×	○	×	×	○	×	×
60	Head side	○	○	○	○	○	○	○	○	○
	Rod side	○	×	×	○	×	×	○	×	×
70	Head side	○	○	○	○	○	○	○	○	○
	Rod side	○	○	○	○	×	×	○	○	○
80	Head side	○	○	○	○	○	○	○	○	○
	Rod side	○	○	○	○	○	○	○	○	○
90	Head side	○	○	○	○	○	○	○	○	○
	Rod side	○	○	○	○	○	○	○	○	○
100	Head side	○	○	○	○	○	○	○	○	○
	Rod side	○	○	○	○	○	○	○	○	○
110	Head side	○	○	○	○	○	○	○	○	○
	Rod side	○	○	○	○	○	○	○	○	○
120	Head side	○	○	○	○	○	○	○	○	○
	Rod side	○	○	○	○	○	○	○	○	○
130	Head side	○	○	○	○	○	○	○	○	○
	Rod side	○	○	○	○	○	○	○	○	○
140	Head side	○	○	○	○	○	○	○	○	○
	Rod side	○	○	○	○	○	○	○	○	○
150	Head side	○	○	○	○	○	○	○	○	○
	Rod side	○	○	○	○	○	○	○	○	○
160	Head side	○	○	○	○	○	○	○	○	○
	Rod side	○	○	○	○	○	○	○	○	○

Note: The undetectable stroke range appears due to interference between the sensor switch and the body mounting bolts.

Moving sensor switch

- Loosening the mounting screw allows the sensor switch to be moved along the switch mounting groove of the cylinder body.
- Tighten the mounting screw with a tightening torque of 0.1~0.2N·m [0.9~1.8in·lbf].

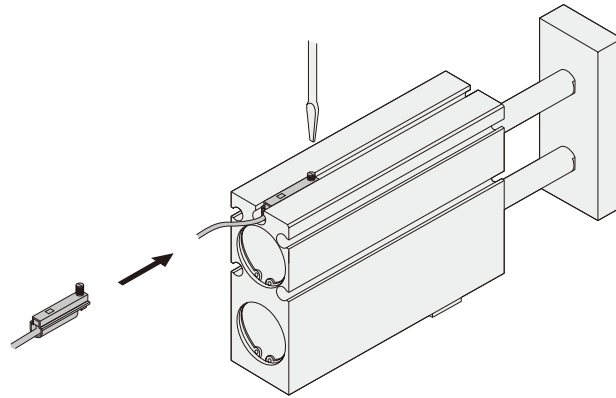

Reed switch type

○ : Mountable △ : Either head side or rod side × : Unmountable — : Fully detectable within stroke (mm)


Bore size		φ 16				φ 20				φ 25			
Mounting groove		A	B	C	Undetectable stroke range of sensor switch	A	B	C	Undetectable stroke range of sensor switch	A	B	C	Undetectable stroke range of sensor switch
Stroke		E	D			E	D			E	D		
10	Head side	△	△	△	Groove A (E) : — Groove B (D) : — Groove C : —	△	△	△	Groove A (E) : — Groove B (D) : 8~10 Groove C : 10	△	△	△	Groove A (E) : — Groove B (D), C : —
	Rod side	△	△	△		△	△	△		△	△	△	
20	Head side	○	○	○	Groove A (E) : — Groove B (D) : — Groove C : —	○	○	○	Groove A (E) : — Groove B (D) : — Groove C : —	○	○	○	Groove A (E) : — Groove B (D), C : —
	Rod side	○	○	○		○	○	○		○	○	○	
30	Head side	○	○	○	Groove A (E) : — Groove B (D) : 29~30 Groove C : 22~30	○	○	○	Groove A (E) : — Groove B (D) : — Groove C : —	○	○	○	Groove A (E) : — Groove B (D), C : —
	Rod side	○	×	○		○	○	○		○	○	○	
40	Head side	○	○	○	Groove A (E) : — Groove B (D) : 35~40 Groove C : 37~40	○	○	○	Groove A (E) : — Groove B (D) : 39~40 Groove C : 31~40	○	○	○	Groove A (E) : — Groove B (D), C : —
	Rod side	○	×	×		○	×	×		○	○	○	
50	Head side	○	○	○	Groove A (E) : — Groove B (D) : 40~50 Groove C : 42~50	○	○	○	Groove A (E) : — Groove B (D) : 44~50 Groove C : 46~50	○	○	○	Groove A (E) : — Groove B (D), C : 46~50
	Rod side	○	×	×		○	×	×		○	×	×	
60	Head side	○	○	○	Groove A (E) : — Groove B (D) : 45~60 Groove C : 47~60	○	○	○	Groove A (E) : — Groove B (D) : 49~60 Groove C : 51~60	○	○	○	Groove A (E) : — Groove B (D), C : 51~60
	Rod side	○	×	×		○	×	×		○	×	×	
70	Head side	○	○	○	Groove A (E) : — Groove B (D) : 50~69 Groove C : 52~67	○	○	○	Groove A (E) : — Groove B (D) : 54~70 Groove C : 56~70	○	○	○	Groove A (E) : — Groove B (D), C : 56~70
	Rod side	○	○	○		○	×	×		○	×	×	
80	Head side	○	○	○	Groove A (E) : — Groove B (D) : 55~74 Groove C : 57~72	○	○	○	Groove A (E) : — Groove B (D) : 59~79 Groove C : 61~77	○	○	○	Groove A (E) : — Groove B (D), C : 61~76
	Rod side	○	○	○		○	○	○		○	○	○	
90	Head side	○	○	○	Groove A (E) : — Groove B (D) : 60~79 Groove C : 62~77	○	○	○	Groove A (E) : — Groove B (D) : 64~84 Groove C : 66~82	○	○	○	Groove A (E) : — Groove B (D), C : 66~81
	Rod side	○	○	○		○	○	○		○	○	○	
100	Head side	○	○	○	Groove A (E) : — Groove B (D) : 65~84 Groove C : 67~82	○	○	○	Groove A (E) : — Groove B (D) : 69~89 Groove C : 71~87	○	○	○	Groove A (E) : — Groove B (D), C : 71~86
	Rod side	○	○	○		○	○	○		○	○	○	
110	Head side	○	○	○	Groove A (E) : — Groove B (D) : 70~89 Groove C : 72~87	○	○	○	Groove A (E) : — Groove B (D) : 74~94 Groove C : 76~92	○	○	○	Groove A (E) : — Groove B (D), C : 76~91
	Rod side	○	○	○		○	○	○		○	○	○	
120	Head side	○	○	○	Groove A (E) : — Groove B (D) : 75~94 Groove C : 77~92	○	○	○	Groove A (E) : — Groove B (D) : 79~99 Groove C : 81~97	○	○	○	Groove A (E) : — Groove B (D), C : 81~96
	Rod side	○	○	○		○	○	○		○	○	○	
130	Head side	○	○	○	Groove A (E) : — Groove B (D) : 80~99 Groove C : 82~97	○	○	○	Groove A (E) : — Groove B (D) : 84~104 Groove C : 86~102	○	○	○	Groove A (E) : — Groove B (D), C : 86~101
	Rod side	○	○	○		○	○	○		○	○	○	
140	Head side	○	○	○	Groove A (E) : — Groove B (D) : 85~104 Groove C : 87~102	○	○	○	Groove A (E) : — Groove B (D) : 89~109 Groove C : 91~107	○	○	○	Groove A (E) : — Groove B (D), C : 91~106
	Rod side	○	○	○		○	○	○		○	○	○	
150	Head side	○	○	○	Groove A (E) : — Groove B (D) : 90~109 Groove C : 92~107	○	○	○	Groove A (E) : — Groove B (D) : 94~114 Groove C : 96~112	○	○	○	Groove A (E) : — Groove B (D), C : 96~111
	Rod side	○	○	○		○	○	○		○	○	○	
160	Head side	○	○	○	Groove A (E) : — Groove B (D) : 95~114 Groove C : 97~112	○	○	○	Groove A (E) : — Groove B (D) : 99~119 Groove C : 101~117	○	○	○	Groove A (E) : — Groove B (D), C : 101~116
	Rod side	○	○	○		○	○	○		○	○	○	

Note: The undetectable stroke range appears due to interference between the sensor switch and the body mounting bolts.


Mountable or Unmountable Sensor Switch and Undetectable Stroke Range at End of Stroke

Rod side end keep cylinder (TBD-RL)

■ In the case of using 3 head side mounting holes on the body

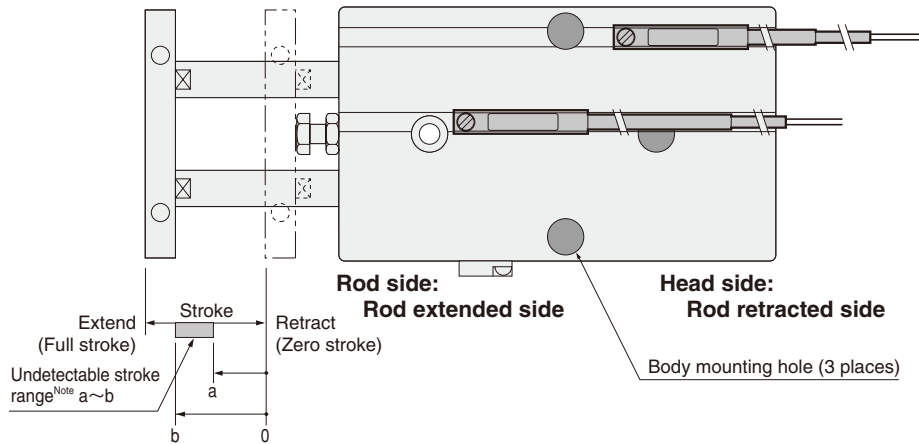

● Sensor switch mounting surface



Mounting a sensor switch in any of the grooves A~E allows detection at either the head side or rod side stroke end, and intermediate positions. The diagram shows the rod side with the square plate removed.

Note: The undetectable stroke range is the value measured from the zero stroke with 1 sensor switch installation.

● Solid state type


○ : Mountable △ : Either head side or rod side × : Unmountable — : Fully detectable within stroke (mm)

Bore size	Mounting groove	φ 16			φ 20			φ 25				
		A	B	C	A	B	C	A	B	C		
Stroke	E	D		Undetectable stroke range of sensor switch	E	D		Undetectable stroke range of sensor switch	E	D		Undetectable stroke range of sensor switch
10	Head side	×	△	△	Groove A (E) : 0~10 Groove B (D) : — Groove C : —	○	△	○	Groove A (E) : 2~10 Groove B (D) : — Groove C : —	○	○	Groove A (E) : — Groove B (D), C : —
	Rod side	×	△	△		×	△			○	○	
20	Head side	×	○	○	Groove A (E) : 0~12 Groove B (D) : — Groove C : —	○	○	○	Groove A (E) : 2~15 Groove B (D) : — Groove C : —	○	○	Groove A (E) : — Groove B (D), C : —
	Rod side	○	○	○		○	○	○		○	○	
30	Head side	×	○	○	Groove A (E) : 0~12 Groove B (D) : — Groove C : —	○	○	○	Groove A (E) : 2~15 Groove B (D) : — Groove C : —	○	○	Groove A (E) : — Groove B (D), C : —
	Rod side	○	○	○		○	○	○		○	○	
40	Head side	×	○	○	Groove A (E) : 0~12 Groove B (D) : 37~40 Groove C : 39~40	○	○	○	Groove A (E) : 2~15 Groove B (D) : — Groove C : —	○	○	Groove A (E) : — Groove B (D), C : —
	Rod side	○	×	×		○	○	○		○	○	
50	Head side	×	○	○	Groove A (E) : 0~12 Groove B (D) : 42~50 Groove C : 44~50	○	○	○	Groove A (E) : 2~15 Groove B (D) : 46~50 Groove C : 48~50	○	○	Groove A (E) : — Groove B (D), C : 47~50
	Rod side	○	×	×		○	×	×		○	×	×
60	Head side	×	○	○	Groove A (E) : 0~12 Groove B (D) : 47~60 Groove C : 49~60	○	○	○	Groove A (E) : 2~15 Groove B (D) : 51~60 Groove C : 53~60	○	○	Groove A (E) : — Groove B (D), C : 52~60
	Rod side	○	×	×		○	×	×		○	×	×
70	Head side	×	○	○	Groove A (E) : 0~12 Groove B (D) : 52~66 Groove C : 54~64	○	○	○	Groove A (E) : 2~15 Groove B (D) : 56~70 Groove C : 58~70	○	○	Groove A (E) : — Groove B (D), C : 57~69
	Rod side	○	○	○		○	×	×		○	○	
80	Head side	×	○	○	Groove A (E) : 0~12 Groove B (D) : 57~71 Groove C : 59~69	○	○	○	Groove A (E) : 2~15 Groove B (D) : 61~77 Groove C : 63~75	○	○	Groove A (E) : — Groove B (D), C : 62~74
	Rod side	○	○	○		○	○	○		○	○	
90	Head side	×	○	○	Groove A (E) : 0~12 Groove B (D) : 62~76 Groove C : 64~74	○	○	○	Groove A (E) : 2~15 Groove B (D) : 66~82 Groove C : 68~80	○	○	Groove A (E) : — Groove B (D), C : 67~79
	Rod side	○	○	○		○	○	○		○	○	
100	Head side	×	○	○	Groove A (E) : 0~12 Groove B (D) : 67~81 Groove C : 69~79	○	○	○	Groove A (E) : 2~15 Groove B (D) : 71~87 Groove C : 73~85	○	○	Groove A (E) : — Groove B (D), C : 72~84
	Rod side	○	○	○		○	○	○		○	○	
110	Head side	×	○	○	Groove A (E) : 0~12 Groove B (D) : 72~86 Groove C : 74~84	○	○	○	Groove A (E) : 2~15 Groove B (D) : 76~92 Groove C : 78~90	○	○	Groove A (E) : — Groove B (D), C : 77~89
	Rod side	○	○	○		○	○	○		○	○	
120	Head side	×	○	○	Groove A (E) : 0~12 Groove B (D) : 77~91 Groove C : 79~89	○	○	○	Groove A (E) : 2~15 Groove B (D) : 81~97 Groove C : 83~95	○	○	Groove A (E) : — Groove B (D), C : 82~94
	Rod side	○	○	○		○	○	○		○	○	
130	Head side	×	○	○	Groove A (E) : 0~12 Groove B (D) : 82~96 Groove C : 84~94	○	○	○	Groove A (E) : 2~15 Groove B (D) : 86~102 Groove C : 88~100	○	○	Groove A (E) : — Groove B (D), C : 87~99
	Rod side	○	○	○		○	○	○		○	○	
140	Head side	×	○	○	Groove A (E) : 0~12 Groove B (D) : 87~101 Groove C : 89~99	○	○	○	Groove A (E) : 2~15 Groove B (D) : 91~107 Groove C : 93~105	○	○	Groove A (E) : — Groove B (D), C : 92~104
	Rod side	○	○	○		○	○	○		○	○	
150	Head side	×	○	○	Groove A (E) : 0~12 Groove B (D) : 92~106 Groove C : 94~104	○	○	○	Groove A (E) : 2~15 Groove B (D) : 96~112 Groove C : 98~110	○	○	Groove A (E) : — Groove B (D), C : 97~109
	Rod side	○	○	○		○	○	○		○	○	
160	Head side	×	○	○	Groove A (E) : 0~12 Groove B (D) : 97~111 Groove C : 99~109	○	○	○	Groove A (E) : 2~15 Groove B (D) : 101~117 Groove C : 103~115	○	○	Groove A (E) : — Groove B (D), C : 102~114
	Rod side	○	○	○		○	○	○		○	○	

Note: The undetectable stroke range appears due to interference between the sensor switch and the body mounting bolts.

■ Moving sensor switch

- Loosening the mounting screw allows the sensor switch to be moved along the switch mounting groove of the cylinder body.
- Tighten the mounting screw with a tightening torque of 0.1~0.2N·m [0.9~1.8in·lbf].

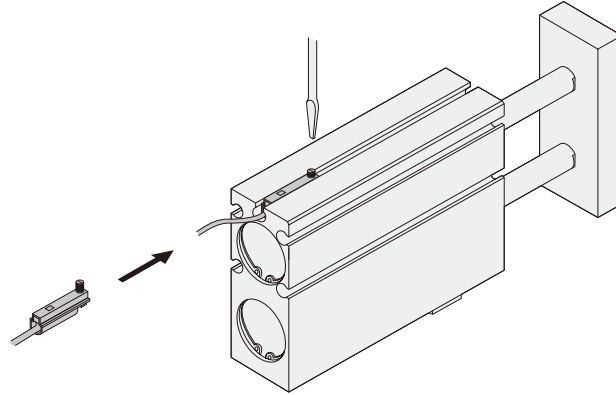

● Reed switch type

○ : Mountable △ : Either head side or rod side × : Unmountable — : Fully detectable within stroke (mm)


Bore size Stroke		φ 16				φ 20				φ 25			
		A	B	C	Undetectable stroke range of sensor switch	A	B	C	Undetectable stroke range of sensor switch	A	B	C	Undetectable stroke range of sensor switch
		E	D			E	D			E	D		
10	Head side	×	△	△	Groove A (E) : 0~10 Groove B (D) : — Groove C : —	×	△	△	Groove A (E) : 0~10 Groove B (D) : — Groove C : —	△	△	△	Groove A (E) : — Groove B (D), C : —
	Rod side	×	△	△		×	△	△		△	△	△	
20	Head side	×	○	○	Groove A (E) : 0~14 Groove B (D) : — Groove C : —	×	○	○	Groove A (E) : 0~17 Groove B (D) : — Groove C : —	○	○	○	Groove A (E) : — Groove B (D), C : —
	Rod side	○	○	○		○	○	○		○	○	○	
30	Head side	×	○	○	Groove A (E) : 0~14 Groove B (D) : 29~30 Groove C : 22~30	×	○	○	Groove A (E) : 0~17 Groove B (D) : — Groove C : —	○	○	○	Groove A (E) : — Groove B (D), C : —
	Rod side	○	×	○		○	○	○		○	○	○	
40	Head side	×	○	○	Groove A (E) : 0~14 Groove B (D) : 35~40 Groove C : 37~40	×	○	○	Groove A (E) : 0~17 Groove B (D) : 39~40 Groove C : 31~40	○	○	○	Groove A (E) : — Groove B (D), C : —
	Rod side	○	×	×		○	×	○		○	○	○	
50	Head side	×	○	○	Groove A (E) : 2~14 Groove B (D) : 40~50 Groove C : 42~50	×	○	○	Groove A (E) : 0~17 Groove B (D) : 44~50 Groove C : 46~50	○	○	○	Groove A (E) : — Groove B (D), C : 46~50
	Rod side	○	×	×		○	×	×		○	×	×	
60	Head side	×	○	○	Groove A (E) : 0~14 Groove B (D) : 45~60 Groove C : 47~60	×	○	○	Groove A (E) : 0~17 Groove B (D) : 49~60 Groove C : 51~60	○	○	○	Groove A (E) : — Groove B (D), C : 51~60
	Rod side	○	×	×		○	×	×		○	×	×	
70	Head side	×	○	○	Groove A (E) : 0~14 Groove B (D) : 50~69 Groove C : 52~67	×	○	○	Groove A (E) : 0~17 Groove B (D) : 54~70 Groove C : 56~70	○	○	○	Groove A (E) : — Groove B (D), C : 56~70
	Rod side	○	○	○		○	×	×		○	×	×	
80	Head side	×	○	○	Groove A (E) : 0~12 Groove B (D) : 55~74 Groove C : 57~72	×	○	○	Groove A (E) : 0~17 Groove B (D) : 59~79 Groove C : 61~77	○	○	○	Groove A (E) : — Groove B (D), C : 61~76
	Rod side	○	○	○		○	○	○		○	○	○	
90	Head side	×	○	○	Groove A (E) : 0~14 Groove B (D) : 60~79 Groove C : 62~77	×	○	○	Groove A (E) : 0~17 Groove B (D) : 64~84 Groove C : 66~82	○	○	○	Groove A (E) : — Groove B (D), C : 66~81
	Rod side	○	○	○		○	○	○		○	○	○	
100	Head side	×	○	○	Groove A (E) : 0~12 Groove B (D) : 65~84 Groove C : 67~82	×	○	○	Groove A (E) : 0~17 Groove B (D) : 69~89 Groove C : 71~87	○	○	○	Groove A (E) : — Groove B (D), C : 71~86
	Rod side	○	○	○		○	○	○		○	○	○	
110	Head side	×	○	○	Groove A (E) : 0~14 Groove B (D) : 70~89 Groove C : 72~87	×	○	○	Groove A (E) : 0~17 Groove B (D) : 74~94 Groove C : 76~92	○	○	○	Groove A (E) : — Groove B (D), C : 76~91
	Rod side	○	○	○		○	○	○		○	○	○	
120	Head side	×	○	○	Groove A (E) : 0~14 Groove B (D) : 75~94 Groove C : 77~92	×	○	○	Groove A (E) : 0~17 Groove B (D) : 79~99 Groove C : 81~97	○	○	○	Groove A (E) : — Groove B (D), C : 81~96
	Rod side	○	○	○		○	○	○		○	○	○	
130	Head side	×	○	○	Groove A (E) : 0~14 Groove B (D) : 80~99 Groove C : 82~97	×	○	○	Groove A (E) : 0~17 Groove B (D) : 84~104 Groove C : 86~102	○	○	○	Groove A (E) : — Groove B (D), C : 86~101
	Rod side	○	○	○		○	○	○		○	○	○	
140	Head side	×	○	○	Groove A (E) : 0~14 Groove B (D) : 85~104 Groove C : 87~102	×	○	○	Groove A (E) : 0~17 Groove B (D) : 89~109 Groove C : 91~107	○	○	○	Groove A (E) : — Groove B (D), C : 91~106
	Rod side	○	○	○		○	○	○		○	○	○	
150	Head side	×	○	○	Groove A (E) : 0~14 Groove B (D) : 90~109 Groove C : 92~107	×	○	○	Groove A (E) : 0~17 Groove B (D) : 94~114 Groove C : 96~112	○	○	○	Groove A (E) : — Groove B (D), C : 96~111
	Rod side	○	○	○		○	○	○		○	○	○	
160	Head side	×	○	○	Groove A (E) : 0~14 Groove B (D) : 95~114 Groove C : 97~112	×	○	○	Groove A (E) : 0~17 Groove B (D) : 99~119 Groove C : 101~117	○	○	○	Groove A (E) : — Groove B (D), C : 101~116
	Rod side	○	○	○		○	○	○		○	○	○	

Note: The undetectable stroke range appears due to interference between the sensor switch and the body mounting bolts.


Mountable or Unmountable Sensor Switch and Undetectable Stroke Range at End of Stroke

Rod side end keep cylinder (TBD-RL)

■ In the case of using 3 rod side mounting holes on the body

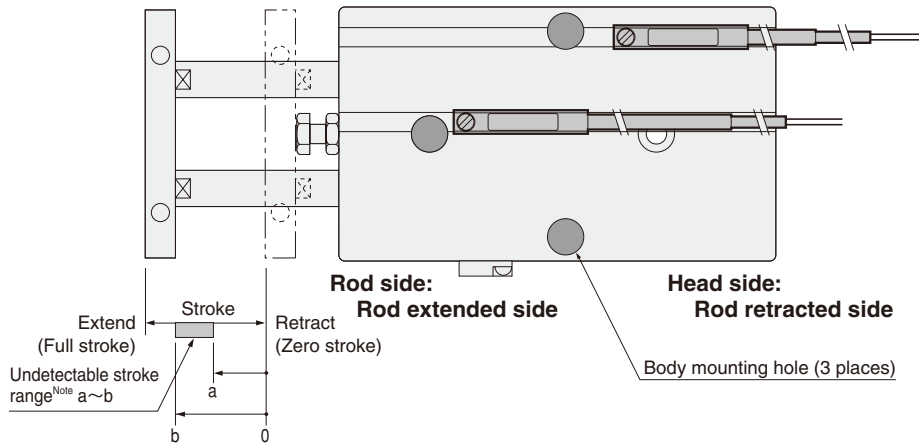

● Sensor switch mounting surface



Mounting a sensor switch in any of the grooves A~E allows detection at either the head side or rod side stroke end, and intermediate positions. The diagram shows the rod side with the square plate removed.

Note: The undetectable stroke range is the value measured from the zero stroke with 1 sensor switch installation.

● Solid state type


○ : Mountable △ : Either head side or rod side × : Unmountable — : Fully detectable within stroke (mm)

Bore size		φ 16			φ 20			φ 25		
Stroke	Mounting groove	A	B	C	A	B	C	A	B	C
		E	D		E	D		E	D	
10	Head side	○	△	△	△	△	○	○	○	○
	Rod side	○	△	△	△	△	○	○	○	○
20	Head side	○	○	○	○	○	○	○	○	○
	Rod side	○	○	○	○	○	○	○	○	○
30	Head side	○	○	○	○	○	○	○	○	○
	Rod side	○	○	○	○	○	○	○	○	○
40	Head side	○	○	○	○	○	○	○	○	○
	Rod side	○	×	×	○	○	○	○	○	○
50	Head side	○	○	○	○	○	○	○	○	○
	Rod side	○	×	×	○	×	×	○	×	×
60	Head side	○	○	○	○	○	○	○	○	○
	Rod side	○	×	×	○	×	×	○	×	×
70	Head side	○	○	○	○	○	○	○	○	○
	Rod side	○	○	○	○	×	×	○	○	○
80	Head side	○	○	○	○	○	○	○	○	○
	Rod side	○	○	○	○	○	○	○	○	○
90	Head side	○	○	○	○	○	○	○	○	○
	Rod side	○	○	○	○	○	○	○	○	○
100	Head side	○	○	○	○	○	○	○	○	○
	Rod side	○	○	○	○	○	○	○	○	○
110	Head side	○	○	○	○	○	○	○	○	○
	Rod side	○	○	○	○	○	○	○	○	○
120	Head side	○	○	○	○	○	○	○	○	○
	Rod side	○	○	○	○	○	○	○	○	○
130	Head side	○	○	○	○	○	○	○	○	○
	Rod side	○	○	○	○	○	○	○	○	○
140	Head side	○	○	○	○	○	○	○	○	○
	Rod side	○	○	○	○	○	○	○	○	○
150	Head side	○	○	○	○	○	○	○	○	○
	Rod side	○	○	○	○	○	○	○	○	○
160	Head side	○	○	○	○	○	○	○	○	○
	Rod side	○	○	○	○	○	○	○	○	○

Note: The undetectable stroke range appears due to interference between the sensor switch and the body mounting bolts.

■ Moving sensor switch

- Loosening the mounting screw allows the sensor switch to be moved along the switch mounting groove of the cylinder body.
- Tighten the mounting screw with a tightening torque of 0.1~0.2N·m [0.9~1.8in·lbf].

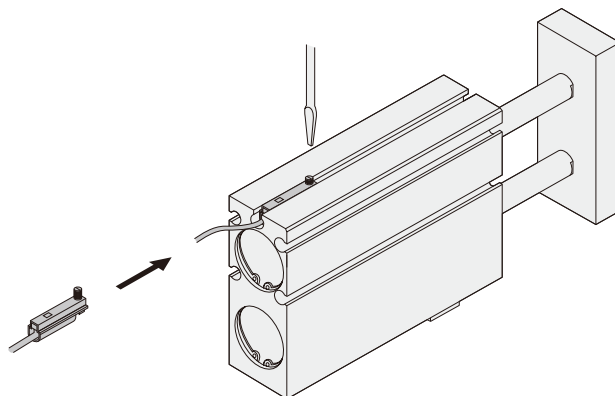

● Reed switch type

○ : Mountable △ : Either head side or rod side × : Unmountable — : Fully detectable within stroke (mm)

Bore size		φ 16				φ 20				φ 25			
Stroke	Mounting groove	A	B	C	Undetectable stroke range of sensor switch	A	B	C	Undetectable stroke range of sensor switch	A	B	C	Undetectable stroke range of sensor switch
		E	D	C		E	D	C		E	D	C	
10	Head side	△	△	△	Groove A (E) : — Groove B (D) : 8~10 Groove C : —	△	△	△	Groove A (E) : — Groove B (D) : 8~10 Groove C : 10	△	△	△	Groove A (E) : — Groove B (D), C : —
	Rod side	△	△	△		△	△	△		△	△	△	
20	Head side	○	○	○	Groove A (E) : — Groove B (D) : 15~20 Groove C : 17~20	○	○	○	Groove A (E) : — Groove B (D) : 18~20 Groove C : —	○	○	○	Groove A (E) : — Groove B (D), C : —
	Rod side	○	○	○		○	○	○		○	○	○	
30	Head side	○	○	○	Groove A (E) : — Groove B (D) : 29~30 Groove C : —	○	○	○	Groove A (E) : — Groove B (D) : 24~30 Groove C : 26~30	○	○	○	Groove A (E) : — Groove B (D), C : 26~30
	Rod side	○	×	○		○	○	○		○	○	○	
40	Head side	○	○	○	Groove A (E) : — Groove B (D) : 35~40 Groove C : 37~40	○	○	○	Groove A (E) : — Groove B (D) : 39~40 Groove C : —	○	○	○	Groove A (E) : — Groove B (D), C : 31~40
	Rod side	○	×	×		○	×	×		○	×	×	
50	Head side	○	○	○	Groove A (E) : — Groove B (D) : 40~50 Groove C : 42~50	○	○	○	Groove A (E) : — Groove B (D) : 44~50 Groove C : 46~50	○	○	○	Groove A (E) : — Groove B (D), C : 46~50
	Rod side	○	×	×		○	×	×		○	×	×	
60	Head side	○	○	○	Groove A (E) : — Groove B (D) : 45~60 Groove C : 47~60	○	○	○	Groove A (E) : — Groove B (D) : 49~60 Groove C : 51~60	○	○	○	Groove A (E) : — Groove B (D), C : 51~60
	Rod side	○	×	×		○	×	×		○	×	×	
70	Head side	○	○	○	Groove A (E) : — Groove B (D) : 50~69 Groove C : 52~67	○	○	○	Groove A (E) : — Groove B (D) : 54~70 Groove C : 56~70	○	○	○	Groove A (E) : — Groove B (D), C : 56~70
	Rod side	○	○	○		○	○	×		○	×	×	
80	Head side	○	○	○	Groove A (E) : — Groove B (D) : 55~74 Groove C : 57~72	○	○	○	Groove A (E) : — Groove B (D) : 59~79 Groove C : 61~77	○	○	○	Groove A (E) : — Groove B (D), C : 61~76
	Rod side	○	○	○		○	○	○		○	○	○	
90	Head side	○	○	○	Groove A (E) : — Groove B (D) : 60~79 Groove C : 62~77	○	○	○	Groove A (E) : — Groove B (D) : 64~84 Groove C : 66~82	○	○	○	Groove A (E) : — Groove B (D), C : 66~81
	Rod side	○	○	○		○	○	○		○	○	○	
100	Head side	○	○	○	Groove A (E) : — Groove B (D) : 65~84 Groove C : 67~82	○	○	○	Groove A (E) : — Groove B (D) : 69~89 Groove C : 71~87	○	○	○	Groove A (E) : — Groove B (D), C : 71~86
	Rod side	○	○	○		○	○	○		○	○	○	
110	Head side	○	○	○	Groove A (E) : — Groove B (D) : 70~89 Groove C : 72~87	○	○	○	Groove A (E) : — Groove B (D) : 74~94 Groove C : 76~92	○	○	○	Groove A (E) : — Groove B (D), C : 76~91
	Rod side	○	○	○		○	○	○		○	○	○	
120	Head side	○	○	○	Groove A (E) : — Groove B (D) : 75~94 Groove C : 77~92	○	○	○	Groove A (E) : — Groove B (D) : 79~99 Groove C : 81~97	○	○	○	Groove A (E) : — Groove B (D), C : 81~96
	Rod side	○	○	○		○	○	○		○	○	○	
130	Head side	○	○	○	Groove A (E) : — Groove B (D) : 80~99 Groove C : 82~97	○	○	○	Groove A (E) : — Groove B (D) : 84~104 Groove C : 86~102	○	○	○	Groove A (E) : — Groove B (D), C : 86~101
	Rod side	○	○	○		○	○	○		○	○	○	
140	Head side	○	○	○	Groove A (E) : — Groove B (D) : 85~104 Groove C : 87~102	○	○	○	Groove A (E) : — Groove B (D) : 89~109 Groove C : 91~107	○	○	○	Groove A (E) : — Groove B (D), C : 91~106
	Rod side	○	○	○		○	○	○		○	○	○	
150	Head side	○	○	○	Groove A (E) : — Groove B (D) : 90~109 Groove C : 92~107	○	○	○	Groove A (E) : — Groove B (D) : 94~114 Groove C : 96~112	○	○	○	Groove A (E) : — Groove B (D), C : 96~111
	Rod side	○	○	○		○	○	○		○	○	○	
160	Head side	○	○	○	Groove A (E) : — Groove B (D) : 95~114 Groove C : 97~112	○	○	○	Groove A (E) : — Groove B (D) : 99~119 Groove C : 101~117	○	○	○	Groove A (E) : — Groove B (D), C : 101~116
	Rod side	○	○	○		○	○	○		○	○	○	

Note: The undetectable stroke range appears due to interference between the sensor switch and the body mounting bolts.

Handling Instructions and Precautions




Mounting and adjustment


Allowable lateral load

The lateral (side) load on the rod end should be at or below the graph values listed below.


$\phi 10$ [0.394in.]




$\phi 16$ [0.630in.]

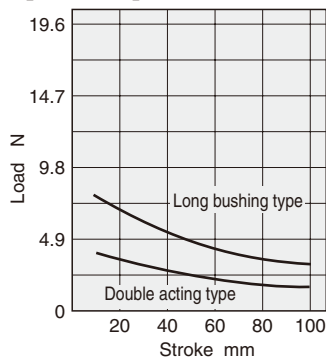


$\phi 20$ [0.787in.]

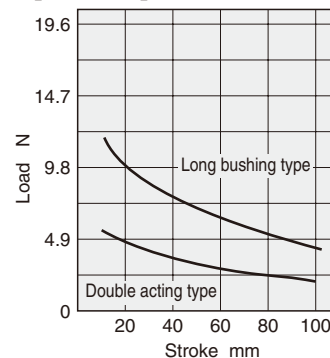

$\phi 25$ [0.984in.]

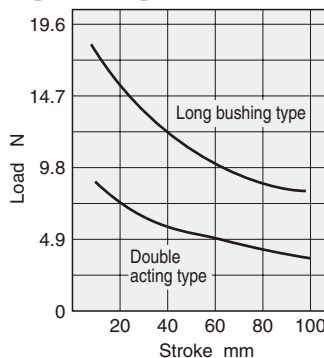

$\phi 32$ [1.260in.]

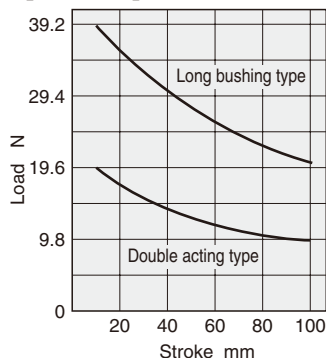

Remark: The $\phi 16 \sim \phi 25$ double acting standard types also include end keep cylinders.


1N = 0.2248lbf.
1mm = 0.0394in.

Square plate eccentricity


For the eccentricity of the square plate without load, use the graph values listed below as guides.

— Double acting type - - - - - Long bushing type


$\phi 10$ [0.394in.]




$\phi 16$ [0.630in.]




$\phi 20$ [0.787in.]



$\phi 25$ [0.984in.]



$\phi 32$ [1.260in.]



Remark: The $\phi 16 \sim \phi 25$ double acting standard types also include end keep cylinders.

1mm = 0.0394in.



Mounting and adjustment

Mounting

1. While any mounting direction is allowed, the mounting surface should always be flat. Twisting or bending during mounting may disturb the accuracy and may also result in air leaks or improper operation.
2. Care should be taken that scratches or dents on the cylinder's mounting surface may damage its flatness.
3. The hexagon socket head bolt on the rod end square plate has been mounted with a conical washer. Always confirm that the rod end square plate and hexagon socket head bolts are secured before using the cylinder.

Stroke adjustment

On the Twin Rod cylinder, stroke adjusting is easy within a range of $-5 \sim 0\text{mm}$ [$-0.197 \sim 0\text{in.}$] (with the exception of -HL: Head side end keep cylinder). Turn the stopper bolt to the left (counterclockwise) to shorten the stroke. Use a lock nut to tighten and secure the stopper in place after adjustment. Do not tighten the bolt to the right (clockwise) beyond the standard position. The stroke at shipping is set to the standard stroke. Do not adjust it to larger than the standard stroke. On the end keep cylinder, avoid application using an external stopper installed on the lock side to adjust the stroke, because it could cause the lock to be incapable of operating.

Cylinder speed

Use the cylinder at a speed of 500mm/s [19.7in./sec.] or less (use a speed controller for adjustment). For high speeds (500mm/s [19.7in./sec.]), install an external stopper, etc., to prevent direct shocks to the cylinder. Consult us if the situation will not permit installation of an external stopper, etc.



Control circuit for the end keep cylinder

1. For control of the twin rod end keep cylinder, we recommend the use of 2-position, 4-, 5-port valves. Avoid the use of control circuit with ABR connection (exhaust center) 3-position valves that exhaust air from 2 delivery ports.
2. Always use meter-out control for speed control. Meter-in control may result in failure of the locking mechanism to release.
3. Always set the air pressure to 0.15MPa [22psi.] or larger.

Notes: 1. It is dangerous to supply air to a connection port on a side with a locking mechanism while the cylinder has already been exhausted, because the piston rod may suddenly extend (or retract). In addition, since the lock piston could also cause galling of the lock piston and piston rod, resulting in defective operation, always supply air to the connection port on the opposite the one adjacent to the locking mechanism to ensure applying back pressure.


2. When restarting operations after air has been exhausted from the cylinder due to completion of operations or to an emergency stop, always start by supplying air to a connection port on the opposite the one adjacent to the locking mechanism.

3. Connect the valve port A (NC) to the connection port on the side with the locking mechanism.



Manual operation of locking mechanism

While the locking mechanism is normally released automatically through cylinder operations, it can also be released manually. For manual release, insert an $\text{M3} \times 0.5$ screw that has 30mm [1.18in.] screw length into the opening for manual override, thread it in about 3 turns into the internal lock piston, and then pull up the screw. To maintain the manual override for adjustment, etc., thread the locknut onto the screw and, with the locking mechanism in a released state, tighten the locknut against the cylinder.



Notes: 1. It is dangerous to release the lock when load (weight) is present on the piston rod, because it may cause the unintended piston rod's extension (or retraction). In this case, always supply air to the connection port opposite the one adjacent to the locking mechanism before releasing the locking mechanism.

2. If the locking mechanism cannot easily be released even with manual override, it could be the result of galling of the lock piston and piston rod. In this case, supply air to the connection port opposite the one adjacent to the locking mechanism before releasing the locking mechanism.

3. Water, oil, dust, etc., intruding through the opening for manual override may be a cause of defective locks or other erratic operation. If using in locations subject to dripping water, dripping oil, etc., or large amounts of dust, use a cover to protect the unit.



Sensor switch

1. In the standard cylinder, the magnet for sensor switch is built-in. Mounting a sensor switch will enable use in sensor switch applications.
2. Do not use a sensor switch mounting screw to secure the sensor switch into the body mounting hole. The sensor switch mounting screw could fall out.



General precautions

Media

1. Always thoroughly blow off (use compressed air) the tubing before piping. Entering chips, sealing tape, rust, etc., generated during piping work could result in air leaks or other defective operation.
2. Use air for the media. For the use of any other media, consult us.
3. Air used for the cylinder should be clean air that contains no deteriorated compressor oil, etc. Install an air filter (filtration of a minimum 40 µm) near the cylinder or valve to remove collected liquid or dust. In addition, drain the air filter periodically. Collected liquid or dust entering the cylinder may cause improper operation.

Lubrication

The product can be used without lubrication, if lubrication is required, use Turbine Oil Class 1 (ISO VG32) or equivalent. Avoid using spindle oil or machine oil.

Atmosphere

1. If using in locations subject to dripping water, dripping oil, etc., or to large amounts of dust, use a cover to protect the unit.
2. The product cannot be used when the media or ambient atmosphere contains any of the substances listed below.
Organic solvents, phosphate ester type hydraulic oil, sulphur dioxide, chlorine gas, or acids, etc.

Criteria for selection

Select the cylinder bore according to the allowable load at the maximum cylinder operating speed.


<Precautions>

- ① Always use a speed controller for the cylinder, and control the speed to within a range of 100~500mm/s [3.9~19.7in./sec.].
- ② When a lateral (side) load is applied to the piston rod, select a bore size within the allowable lateral load range (see the graphs on p.821).

When the load has exceeded the allowable value during use, always install an external stopper (shock absorber, etc.) to prevent direct shocks to the cylinder.

<Precautions>

- ① For the external stopper (shock absorber, etc.), select a stopper with sufficient absorbing capacity.
- ② Consult us if the situation will not permit the installation of an external stopper.
- ③ When a lateral (side) load is applied to the piston rod, limit within the allowable lateral load range (see the graphs on p.821).

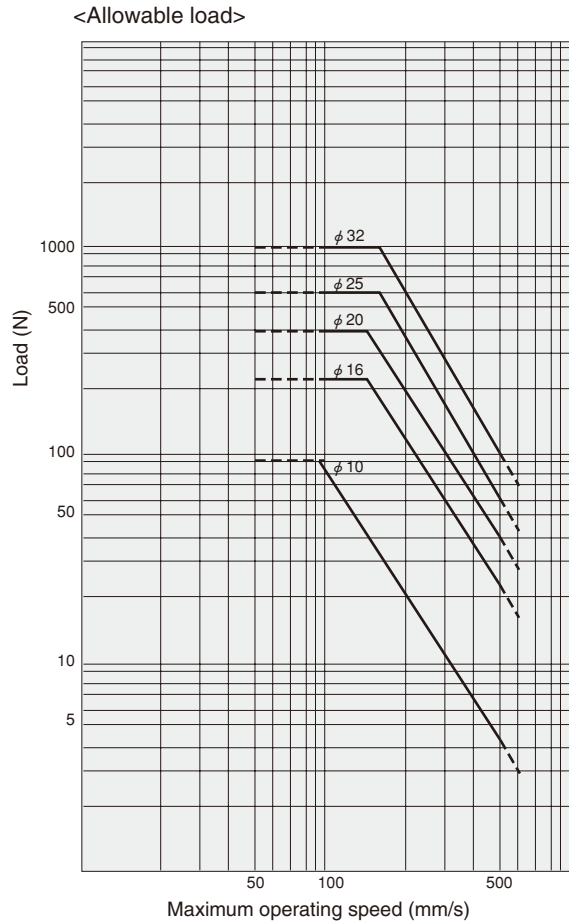

<How to read the graph>

When a 59N [13.2lb.] load is carried with $\phi 20$ [0.787in.], the maximum operating speed must be set to 400mm/s [15.7in./sec.] or less.

※ The maximum load in the graph is when air pressure of 0.7MPa [102psi.] is applied to the cylinder push side. The load will decrease in applications such as retracted side operations and lower air pressure applications.

1N = 0.2248lbf.
1mm/s = 0.0394in./sec.

